

MADFORWATER

Development and application of integrated technological and management solutions FOR wastewater treatment and efficient reuse in agriculture tailored to the needs of Mediterranean African Countries

Deliverable No.	Deliverable 1.2
Deliverable Full title	Water stress and Water Vulnerability indicators and maps
Work Package No. and Title	WP1 - Water and water-related vulnerabilities in Egypt, Morocco and Tunisia
Lead beneficiary (extended name and acronym)	ALTER
Authors (Acronyms of beneficiaries contributing to the deliverable)	Judit Snethlage, Angel de Miguel, Emma Daniels, Jochen Froebrich (ALTER)
Planned delivery date	31/01/2018
Actual delivery date	15/12/2018
Dissemination level: (PU = Public; PP = Restricted to other program participants; RE = Restricted to a group specified by the consortium; CO = Confidential, only for members of the consortium)	PU
Project website	www.madforwater.eu
Project start date and duration	Start date of project: 01 June 2016 Duration: 48 months

The communication reflects only the author's view and the Executive Agency for Small and Medium-sized Enterprises is not responsible for any use that may be made of the information it contains.



This project has received funds from
the European Union's Horizon 2020
research and innovation programme
under Grant Agreement No 688320

Table of Contents

1	Abstract.....	8
2	Introduction	10
3	Current Water Stress and Water Security	12
3.1	Approach for Characterising Water Stress and Water Security.....	12
3.1.1	Towards a nested approach.....	12
3.1.2	Principle approach applied within this study.....	17
3.1.3	Water Stress Indicators at Subnational scale	18
3.1.4	Calculating the Economic Water Security at National scale.....	22
3.1.5	Integration of results from analyses at sub-national and national scales.....	27
3.2	Characterising Water Stress and Water Security in Morocco.....	28
3.2.1	Mapping Water Stress at Sub-national level	28
3.2.2	Assessing Economic Water Security at national scale	33
3.2.3	Sub-Conclusion Morocco	34
3.3	Characterising Water Stress and Water Security in Tunisia.....	37
3.3.1	Mapping Water Stress at Sub-national level	37
3.3.2	Assessing Economic Water Security at national scale	42
3.3.3	Sub-Conclusion Tunisia	42
3.4	Water stress and Water Security in Egypt.....	45
3.4.1	Mapping Water Stress at Subnational level	45
3.4.2	Assessing Economic Water Security at national scale	48
3.4.3	Sub-Conclusion Egypt.....	48
3.5	General conclusion current state	49
4	Water Stress outlook 2050	51
4.1.1	Approach for estimating the water stress outlook for 2050.	51
4.2	Water stress outlook 2050 Morocco.....	53
4.2.1	Temporal reliability of water resources outlook 2050	53
4.2.2	Water Stress Outlook.....	54
4.2.3	Storage Drought Duration Length Index – SDL outlook.....	56
4.2.4	Sub-Conclusion Morocco	57
4.3	Water Stress outlook 2050 - Tunisia.....	58
4.3.1	Temporal reliability of water resources.....	58

4.3.2	Water Stress Outlook.....	59
4.3.3	Sub-Conclusion Tunisia	62
4.4	Water Stress outlook 2050 Egypt	63
4.4.1	Temporal reliability of water resources.....	63
4.4.2	Water Stress Outlook.....	64
4.4.3	Storage Drought Duration Length Index – SDL outlook.....	65
4.4.4	Sub-Conclusion Egypt	65
5	Waste Water Reuse potential 2050.....	67
5.1	Approach Mapping Waste Water reuse Potential	67
5.2	Mapping of Waste water reuse potential for irrigation in Morocco	68
5.3	Mapping of Waste water reuse potential for irrigation in Tunisia.....	70
5.4	Mapping of Waste water reuse potential for irrigation in Egypt.....	72
5.5	Business Potential for the European Water Sector	74
6	Bibliography	77

List of abbreviations and symbols

ADB – Asian Development Bank
AG_c - Agricultural goods consumption
AG_p - Agricultural good production
AgrET: Agricultural evapotranspiration (km³)
APWF - Asia-Pacific Water Forum
AWDO 2016- Asian Water Development Outlook 2016
C_t: total storage capacity within a region of consideration (km³)
C_v - Coefficient of variation
C_{v a}- Coefficient of variation of rainfall (between years)
C_{v m}- Coefficient of variation of rainfall within years
DDM - Average hydrological drought duration (months)
GAEZ - Global Agro- Ecological Zones
GDP – Gross Domestic product
GDP_A : Agricultural gross domestic product (million \$)
GDP_I - Gross Development product in Industry (\$ million dollar)
IWMI - International Water Management Institute
MENA- Middle East and North Africa
MENA- Middle East and North Africa
MPE - Minimum platform for electricity production
PE - Electricity production (GWh)
PIB - Product Brut Interieur,
SADC - Southern African Development Community
SDG – Sustainable Development Goal
SDL- Total dam capacity/total freshwater withdrawal per month)/mean annual drought duration Data availability
SLI - The storage drought-duration length
SPI - Standardized Precipitation Index
SR- Storage ratio
SSA - Self-sufficiency in agriculture
TRWR – Total renewable water resources
UN- United Nations
WP_A- Water productivity in the agriculture sector
WP_E - Water productivity of energy production
WP_I - Industrial water productivity
WR_E - Water resources consumed (km³)
WR_I - Water withdrawal for industrial consumption (km³)
WS- Water Security
WSt Water Stress
Ww : total annual freshwater withdrawal (km³)
μ – Average monthly precipitation (mm)
σ - Standard deviation

List of figures

Figure 1 Overview on the Key dimensions and it related Sub-Indicators of the 2016 AWDO assessment framework.	15
Figure 2 combining the spatial distributed information to characterize Water Stress at subnational scale	17
Figure 3: Index/ Sub-index Structure and calculation of the 2016 AWDO Key dimension II- Economic Water Security (taken from AWDO, 2016)	23
Figure 4: Decision making tree to prioritise wastewater reuse interventions to increase Water Security	27
Figure 5: Inter-annual rainfall variability, Morocco, current conditions.....	28
Figure 6: Intra-annual rainfall. Morocco, current conditions	29
Figure 7: Storage ratio, Morocco, current conditions.....	29
Figure 8: Morocco Total Renewable Water Resources.....	30
Figure 9: Water Withdrawal and location of irrigated areas, Morocco, current condition	31
Figure 10: Water Exploitation Index, Morocco, current condition	31
Figure 11: Morocco, current drought duration.....	32
Figure 12: Morocco Storage-Drought Duration Index.....	32
Figure 13: Integration results from assessing Water Stress at subnational scale and Water Security at national scale Morocco	35
Figure 14: Tunisia, current inter-annual rainfall	37
Figure 15: Tunisia Current intra-annual rainfall.....	38
Figure 16: Tunisia, storage ratio.....	38
Figure 17: Total Renewable Water Resources, Tunisia, current conditions.....	39
Figure 18: Tunisia, water withdrawal and location of irrigated areas, current conditions.....	40
Figure 19: Tunisia current Water Exploitation Index	40
Figure 20: Tunisia current drought duration	41
Figure 21: Tunisia Storage-Drought Duration Index	41
Figure 22 : Integration results from assessing Water Stress at subnational scale and Water Security at national scale Tunisia	43
Figure 23: Egypt current inter-annual rainfall.....	45
Figure 24: Egypt Current intra-annual rainfall.....	46
Figure 25: Egypt current Water Withdrawal and location of irrigated areas	46
Figure 26: Egypt current drought duration	47
Figure 27 climate change forecasting and estimations for the future water consumption towards a 2050 Water Stress outlook	51
Figure 28: Morocco 2050 inter-annual rainfall (RCP 8.5)	53
Figure 28: Intra-annual rainfall (RCP 8.5), Morocco, Outlook 2050	53
Figure 29: Morocco 2050 Water Withdrawal (SSP3).....	54
Figure 30: Morocco 2050 Water Exploitation Index (RCP8.5/SSP3).....	55
Figure 31: Morocco 2050 Drought duration (RCP 8.5).....	56
Figure 32: Morocco 2050 Storage-Drought Duration Index (RCP 8.5).....	56
Figure 34: Inter-annual rainfall (RCP 8.5), outlook 2050 Tunisia	58
Figure 35: Intra-annual rainfall (RCP 8.5), Tunisia, Outlook 2050.....	58
Figure 36: Tunisia 2050 Water Withdrawal (SSP3)	59
Figure 37: Tunisia 2050 Water Exploitation Index (RCP8.5/SSP3)	60
Figure 38: Tunisia 2050 Drought duration (RCP 8.5)	61
Figure 39: Tunisia 2050 Storage-Drought Duration Index (RCP 8.5)	61
Figure 40: Egypt 2050 inter-annual rainfall (RCP 8.5).....	63
Figure 41: Egypt 2050 intra-annual rainfall (RCP 8.5).....	64
Figure 42: Egypt 2050 Drought duration (RCP 8.5)	65
Figure 43 Simplified approach to enable wastewater reuse potential mapping in Morocco, Tunisia, and Egypt.....	68
Figure 44 Morocco current Wastewater production divided by irrigated area at district level	69

Figure 45: Morocco current location of wastewater production hotspots and location of irrigated areas .	70
Figure 46: Tunisia current Wastewater production divided by irrigated area at district level.....	71
Figure 47: Tunisia current location of wastewater production hotspots and location of irrigated area	72
Figure 48: Egypt current Wastewater production divided by irrigated area at district level.....	72
Figure 49: Egypt current location of wastewater production hotspots and location of irrigated areas.....	74

List of Tables

Table 1 Sub-indexes Economic Water Security.....	22
Table 2. Final values calculated and score, Morocco, National Scale	33
Table 3. Final values calculated and score, Tunisia, National Scale.....	42
Table 4. Final values calculated and score, Egypt, National Scale.....	48
Table 4 selected areas of raw wastewater reuse in agriculture (from Choukr Allah, 2005 with reference to CSEC data from 1994)	69
Table 6 SWOT Analysis of the Moroccan Wastewater Market (transferred from Dutch to European perspective)	75

Disclaimer:

The maps had been elaborated on the base of publicly available shape files. Depicting any political borders does not refer to any specific official recognition by the EU or any other political body.

1 Abstract

Agricultural development plays an important role in the economies of the Mediterranean African Countries. Food demand is increasing in the Mediterranean African Countries and consumption patterns are changing. The countries face common challenges in their strategy to improve food security. The most significant challenges are a rapid population growth, urbanisation, dependency on rainfed agriculture with fluctuating yields, water scarcity, increased water demands, and challenges in water quality. Water scarcity has reached a critical point in the region, and the dependency on rainfall makes the Mediterranean African Countries extra vulnerable to climate changes.

The Mediterranean African Countries offers plenty of opportunities for agricultural development: Availability of arable land, a temperate Mediterranean climate with year-round production possibilities, and a growing consumer market.

A number of different efforts had been made in the past to quantify the Water Stress and Water Vulnerability in the past. Within this study, the 2016 AWDO framework had been used to allow a more consistent comparison of information both with previous and forthcoming international studies.

Water Security and Water Vulnerability are considered as interrelated terms, where the one is the inverse of the other. Water Security had however gained over the recent decades a more prominent standing in the international community or donors, scientists, and policy makers.

Depicting Water Security leads inevitably to the question, " security for whom"? The 2016 AWDO framework was developed within the Asian Water Development Outlook to offer a consistent approach for the Household Water Security, the Economic Water Security, the Urban Water Security, the Environmental Water Security and the Resilience to Water Related Disasters, referred to as the five key dimensions. By this the framework follows the classical People, Planet, and Profit paradigm as being applied in determining the sustainable development while adding a special focus on the urban situation and water risks. The full AWDO 2016 framework requires a rather large amount of data. Concentrating on the dimension of the Economic Water Security offers instead a good trade off, allowing to reduce the number of input data while at the same time providing a sufficient diversity in the consideration of other sectors.

In this view, the Economic Water Security as defined in the 2016 AWDO framework has been used to determine relevant aspects for the Water Security in Morocco, Tunisia, and Egypt. Water Stress is considered as the ratio of Total Withdrawal over Total Renewable Freshwater Resources.

A nested framework had been applied to depict first the Water Stress and other key information on the water resource availability for all river basins in Tunisia and Morocco as well as for the different irrigation areas in Egypt. The related results had been then aggregated at national scale in order to calculate the Economic Water Security Index at national scale under the use of further socio economic statistics. This aggregation had been necessary as the requested socio-economic background information could not been provided at the scale of river basins (Morocco, Tunisia) or irrigation areas in Egypt.

In order to depict possible changes as a result of climate change and an increase in consumption, climate model ensemble runs from the CORDEX data base have been used to elaborate future aspects on the availability of water resources on the scale of catchments and in the case of Egypt on the irrigation areas instead.

The results of this analysis are suited to provide a detailed insight on spatial variations of Water Stress. There is a high variability of rainfall in the coastal areas of Morocco, distinct north south variations of water availability in Tunisia, and a comparable uniform situation in Egypt because of distributing the Nile water in irrigation channels up to the Nile river delta.

The score of the 2016 AWDO Economic Water Security is not affected by weighting factors and the results of the study allow hence a comparison amongst the countries. Additionally, the results underline possible

pathways to use selected indicators of the AWDO framework as so-called anchor indicators and to route relevant insights across the scales.

Future effort should be spent to investigate further the possible effects from the aggregation process and to which extend the framework is suited to reflect pilots for introducing wastewater adequately.

For determining the wastewater reuse potentials in irrigation, different maps have been elaborated for Morocco, Tunisia, and Egypt. As a result, priority areas are highlighted, where the close vicinity of wastewater production and existing of irrigated areas would favour interventions to implement wastewater reuse schemes.

The findings of this study indicate the added value of applying elements from the 2016 AWDO Framework to allow a systematic reflection and comparison of key information to characterise water stress and Water Security.

2 Introduction

The presented deliverable report is related to the Task 1.2 – Analysis and mapping of Water Stress, Water Vulnerability and potential for water reuse in Egypt, Morocco and Tunisia (M1-20). The aim of this study is to provide a basis for assessing measures that can improve the agricultural water productivity with a special focus on increasing the re-use of wastewater in agriculture.

The results of the analyses are presented in three distinct parts. The first part comprises the description of selected Water Stress related indicators at subnational scale in order to provide a further insight on possible variations of Water Security related information within the corresponding country. For this, the inter- and intra-annual rainfall variability, the water exploitation index, and the storage drought duration length index had been chosen as relevant indicators. In a subsequent step, these indicators were aggregated and integrated into the calculation of the economic Water Security index at national scale. The second part provides an outlook on how the same Water Stress related indicators might develop in future times. The outlook was made on the base of climate model ensemble predictions until the year 2050. The third part of the report deals with an indication of the wastewater reuse potential for the three countries Morocco, Tunisia, and Algeria.

Water Stress and Water Vulnerability are terms that are commonly used in the language of scholars, the development community, think tanks and donor organizations. Usually the intention is to highlight risks and problems that centre on the trinity of the water challenge “too much – too little - too dirty”! While there is since long, a common understanding for the sense of urgency, still today there is no unified definition how to measure Water Stress, Water Vulnerability, and Water Security. In particular when it comes to the question, which sub-indicators should be considered, the literature offers a vast diversity of definitions, approaches and assessment frameworks. Furthermore, there is a high diversity of scales at which the different assessments had been applied.

Within the presented study, Water Stress, Water Vulnerability and Water Security are understood as interrelated subjects (Box 1), where Water Stress is mainly depicting a mismatch between demand and availability for a given moment. Beyond that, Water Vulnerability and Water Security include aspects of risks and potentials to deal with unwanted shortfalls.

Water stress

- Application quite strongly influenced by the Falkenmark index (available water volume per capita), and the water exploitation index (total abstraction / long-term renewable resources)¹
- attempts to consider water quality aspects (not enough quantity in the demanded quality) but this interpretation had not been endorsed widely and the necessary consequence
- Status-oriented interpretation - does not consider adaptive capacity
- Negative connotation

Water vulnerability

- Usually applied as a wider concept than Water Stress.
- Includes elements as risk and adaptive capacity
- Not per se clear definition who is vulnerable (people, environment, water bodies)?
- Less prominently applied and manifested in the international debate
- Negative connotation

Water security

- Still emerging paradigm but increasing consolidation in its definition and high level peer reviewed papers
- Covering relevant key dimensions and strongly linked to the Nexus debate
- Recognized and used amongst others by UN, ADB, World Bank, World Economic Forum, GWP, IUCN, OECD, IWMI, UNESCO-IHP
- Security is the inverse of insecurity and hence related to vulnerability / stress

Box 1 Three major concepts linked

¹As e.g. used in <https://ec.europa.eu/eurostat/>

Recent works in the international community increasingly focus on Water Security. Water Stress and Water Vulnerability have a negative connotation that makes it often difficult to mobilize support from stakeholders and decision makers. Water Vulnerability and Water Security are considered in this study as inversely related. In this view, a low Water Security is synonym for a high vulnerability against Water Stress and vice versa, high vulnerability demarks a low Water Security.

The presented deliverable investigates Water Stress related aspects as a relevant input into characterising Water Security. However, there is still a remarkable diversity in framing the term Water Security. Defining metrics for the quantification of Water Security depends to a large extent on the questions, "who should be secured", which data should be used for a reflection, and which data are accessible to realize such.

The intention within the project Mad4water was not to create just another assessment framework, but to seek ways how the results of the MADFORWATER project can be linked to an accepted debate in the international research and development community.

In order to enable a better comparability, a consistency in recurring investigations, and to allow some prediction of future developments, the 2016 AWDO assessment framework have been used to calculate the Economic Water Security at national scale and the related sub-indices at subnational scale.

Similar to the developments for accessing Water Security, the scientific field of indicating the wastewater re-use potential is still developing. The availability of data at the related spatial resolutions influences strongly the assessment frameworks chosen. With the focus of this deliverable report to depict spatial variations, the accessibility of distributed information had been perceived as the key constraint. In this regard, the Waste Water Reuse Potential therefore has been elaborated by processing remote sensing data to characterize proxy information for selected socio economic conditions.

3 Current Water Stress and Water Security

3.1 Approach for Characterising Water Stress and Water Security

3.1.1 Towards a nested approach

Recent developments in framing a Water Security

The United Nations (UN)-Water Task Force on Water Security defines: "Water security as the capacity of a population to safeguard sustainable access to adequate quantities of acceptable quality water for sustaining livelihoods, human well-being, and socio-economic development, for ensuring protection against water-borne pollution and water-related disasters, and for preserving ecosystems in a climate of peace and political stability" (UN Water, 2013).

Since the 1990s, "The concept of Water Security has served to articulate concern about issues such as reliability, quality, quantity, safe and equitable access, and environmental provisioning of water supplies." (Gerlak et al., 2018). Water security has been increasingly employed in policy (and policy influencing) circles, from the World Wildlife Fund and the World Economic Forum, OECD, IWMI, GWP, the World Bank, the Asian Development Bank, as well as the United Nations (UN) (WWF, 2009; UNEP, 2009; WEF, 2011; UN-Water, 2013; UNESCO, 2013) as well as to other relevant players as the World Economic Forum or CDP.

80% of the world's population is exposed to high levels of threat to Water Security, where 65% habitats associated with 65% of continental discharge can be classified as moderately to highly threatened, and there is a need to address both the dimensions of human Water Security and environmental Water Security in an integrated way (Vörösmarty et al., 2010).

"Water security is simultaneously a condition to be measured, a framework for decision making, and a policy objective" (Gerlak et al., 2018). Water security is according to Lee (2016) a wider concept than Water Stress, water scarcity and water poverty, enabling a strong consideration of the economic impacts. These can be a "robust concept in explaining economic nature of water, flood risk and the water-energy-food nexus".

Water security should be furthermore understood as a "dynamic continuum that will alter with changing climates, growing economies and asset stocks, and resource degradation" and not as a static goal (Sadoff et al., 2015).

"Water security encapsulates complex and interconnected challenges and highlights water's centrality for achieving a sense of security, sustainability, development and human well-being, from the local to the international level. Many factors contribute to Water Security and range from biophysical to infrastructural, institutional, political, social and financial – many of which lie outside the water realm. Water security, therefore, lies at the centre of many security areas, each of which is intricately linked to water (Zeitoun, 2011). Therefore, addressing Water Security requires interdisciplinary collaboration across sectors, communities and political borders, so that the potential for competition or conflicts over water resources, between sectors and between water users or states, is adequately managed (Wouters et al., 2009)." (UN-Water, 2013).

"Water security has emerged as a major framing template in environmental governance and resource management. The term and underlying concepts have attracted the attention of governmental and non-governmental organizations, private industry, and the academy in policy and practice. Notwithstanding the palpable rise in its use, a comprehensive understanding of how Water Security is conceptualized and employed in different contexts around the world is limited." (Gerlak et al., 2018). A systematic analysis of 124 articles, books, and book chapters published between 2010-2015 had been performed by (Gerlak et al., 2015) to identify how the term Water Security is defined, framed and applied in different hydrological

and socio economic environments. A “broad diffusion of Water Security across geographic regions and scales, expansive framing of Water Security, and evolving approaches to indicator formulation” had been found still. According to (Gerlak et al., 2018), the persistent diversity in perspectives and applications of Water Security causes that “scholars adapt the concept to the contexts of the cases they are studying”. This demands for incorporating the community context.

(Lautze and Manthritilake, 2012) provided a multi-dimensional Water Security assessment covering five different dimensions including a) Household needs, b) Food Production, c) Environmental Flows, d) Risk management and e) the independence (as dependency from external water resources). Results are provided for the countries in the Asia Pacific region. They also share a critical reflection, stressing on the one hand the need to define first on a clear set of key elements before actively pursuing the consideration of Water Security in high profile debates. On the other hand concluding that as long assessment concepts can be interpreted in multiple way, there is a less strong need to agree on a certain concept. Notwithstanding noting a risk that emphasizing Water Security as a new header can lead to confusion and inflated expectations, the benefits of using an overall score at country level is to trigger attention to certain areas and in differentiating sub-components can help to obtain indications of the “factors explaining Water Security performance.”

Within their contribution to consolidate, indicators for a risk-based perspective in the Water Security assessment, (Fischer et al., 2015) introduced the use of GDP per capita as proxy for economic-institutional coping capacity. As well as ways to address the hydro-climatic complexity in terms of Total renewable freshwater resources per capita, the ratio of total withdrawal to total renewable water resources, variability of monthly runoff and the dependency share of external total renewable water resources.

(Sadoff et al., 2015) presented an attempt to link Water Security to sustainable growth, while considering the interaction to four distinct principle risks (i) water scarcity, (ii) flooding, (iii) inadequate water supply and sanitation, and (iv) the impact of water insecurity on the environment. The findings of (Sadoff et al., 2015) underline that “water insecurity acts as a drag on global economic growth.” There should be policies and infrastructure investments that can “enhance Water Security; to allocate water between alternative uses; to deliver water at specific times, places, and prices; to ensure water quality; and to protect people and assets from water-related hazards. ”

An extensive analysis is performed of factors influencing the Water Security in the MENA region by the World Bank (2017). For each MENA country an assessment was made to describe the relative impact of water in-security in relation to the 1) Economic losses from inadequate water supply and sanitation (% of GDP), 2) GDP exposure to Water Stress (% of GDP), 3) Expected annual property damage due to fluvial and coastal flooding (% of GDP), 4) Percent deaths of children under five due to diarrhoea (share %), 5) Population exposure to Water Stress (share %), 6) Total number of people affected by floods (1980–2016), and 7) Water quality threat (%). Moreover, further indicators had been applied to describe the country situation along three dimensions of Water Security related to (i) water resources, (ii) water services, and (iii) water-related risks.

Within their reflection on paradigms in agricultural Water Security, (Malekian et al., 2017) emphasized that the Water Security is not only multi-dimensional, but also very much dependent on the question “what is acceptable”, which will be answered differently by engineers, scientists, farmers affected, and politicians.

Highlighting a differentiation between the developmental approach (“seeking to improve Water Security over time”) and the risk-based approach (“seeking to manage risks and to reduce vulnerability to shocks resulting from climate variability and water-related disasters”), (Beek and Arriens, 2014) postulated the need for integrating. Moreover they presented a stepwise approach and a scorecard (based on the 2013 AWDO framework) to evaluate potential management scenarios.

Overall, Water Security must be understood as a rather comprehensive framework that includes relevant aspects of Water Stress and Water Vulnerability. Ways should be explored to consolidate and harmonize further the assessment methods.

The current debate and reporting emphasized the need to find ways to address the different dimensions and perspectives of Water Security when it comes to the planning of interventions and measures.

While there is an emerging consolidation within the literature to internalize and to frame the multidimensional character in Water Security assessment, comparable little is reported on comprehensive approaches to improve Water Security in its multi facet appearance.

Generally, a number of critical aspects revealed from the literature review, which need to be considered when applying Water Security assessments at different spatial and temporal scales.

- **Reaching a consistency in terminology and the set of indicators used**

For comparing results between territories, scales, and to account changes over time there is a need to agree on a common terminology, a common framework, and a strict set of sub-indicators related. On the other hand, choosing selected sub-indices will limit the ability to characterize the wider system complexity.

Increasing the number of indicators in a specific context can elaborate more aspects to reflect a specific situation better, but it often results in significant effort for the data collection. By that, it is difficult to be repeated at other locations and hence it reduces the comparability of results.

- **Avoiding the participative determination of weighting factors**

Many compound indicators e.g. such as proposed by (Strathatou et al., 2016) define the weighting factors for integrating the indicator components in a participative way. While this is a widely accepted technique to increase the shared ownership of results, it is highly context specific and depends on the composition of the stakeholder groups involved. A comparability of results is only possible, if the same weighting factors are still being applied. As larger the spatial extension of the investigation area is, as more likely will the different priorities and stakeholder perceptions lead to different weighting factors.

In order to ensure a comparability of results, a preference to frameworks that avoid the use of weighting factors should be given.

- **Assessing Water Security across different scales**

The question at which scale the assessment frameworks should be applied, is not trivial. Many studies investigate the Water Security at national level. At this level, aggregated data are available from national statistic services and global databases.

When the impact of individual measures need to be evaluated, the assessment at a national scale is insufficient. Analysing the specific local context of the intervention case is then a common practice. Applying a similar in-depth study at larger scales is usually hampered by the non-availability of data and/ or would incur a disproportionately high effort and expense.

However, for an evaluation of possible impacts of wastewater reuse, it is still desired to transfer results from local to larger scales. There is hence a need to harmonize the assessment at the different scales and to create ways for exchanging findings between the different scales

- **Outlook on future developments**

For a multi-decadal prediction of future Water Security, model studies can be available for some, but not necessarily for all parameters. Future agricultural water consumption, energy demands,

or the discharge of pollutants is mainly influenced by human behaviour in a changing socio-economic context, which is difficult to predict in numeric terms.

There is a need to find also a suited subset of indicators that can be calculated both for the baseline as well as for future scenarios.

Considering these aspects, it becomes clear that there is no one-fits all solution. However, combining, a standard set of indicators that can be consistently applied at all scales and regions with additional in-depth studies focusing on specific interventions appears as a promising approach for future studies.

Advantage of using the AWDO 2016 Economic Water Security index as framework to assess Water Security

The 2016 AWDO assessment framework have been originally developed as part of the Asian Pacific Water Development outlook (AWDO 2016 b) and as a multinational initiative to determine the Water Security in all Asian and Pacific states.

Overall, the 2016 AWDO framework provides a comprehensive approach to cover the relevant aspects of Water Security in a systematic way and along five distinct Key Dimensions.

Each Sub-indicator within the five Key Dimensions is again calculated on the base of individual sub-sub indicators. By that, the overall effort for data acquisition even at the consideration at national scale is reasonable high. Aiming at an elaboration of more detailed information at sub-national level, the required effort is increasing correspondingly. Making use of the framework's modular concept, a selection of a relevant Key Dimension is hence of advantage when the investigation should entail analysis on variations within a country (subnational scales).

Figure 1 gives an overview on the related sub-indicators for each Key Dimension. Within this study, the calculations are restricted to the determination of the Economic Water Security, as it provide key information in the view of future wastewater reuse.

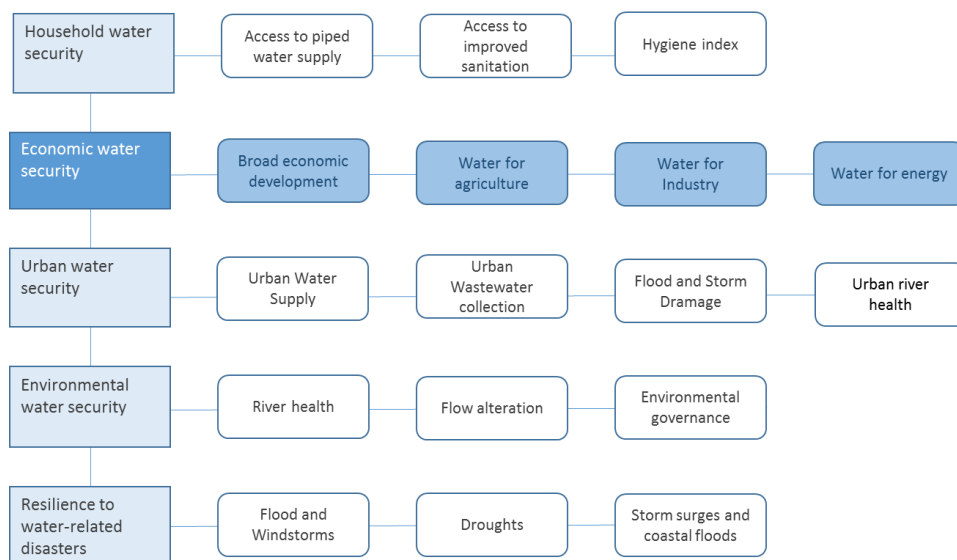


Figure 1 Overview on the Key dimensions and it related Sub-Indicators of the 2016 AWDO assessment framework.

Within this study, the calculations are restricted on the Economic Water Security.

The 2016 AWDO assessment framework is one of the very few frameworks that has not only received the support from relevant international organisations such as the GWP, ADB, FAO and IWMI, but that also have been applied in a recurrent way 2007, 2013, 2016 and 2020 (upcoming release) for all countries in the Asian Pacific region.

The Key advantages considered of the 2016 AWDO framework are summarized in Box 2. The choice of using it for the presented study is based on the fact that

- each Key-Dimension can be assessed as a standalone indicator
- the indicator can be calculated without associating stakeholder weightings to the sub-indices
- the results of the Key dimensions can be compared with other studies and regions as long the indicator subset remains complete

- Modular and straight forward approach
- No weighting factors that need to be specified/ agreed upon in a participative way
- Sensible differentiation of 5 dimensions following the People – Planet- Profit paradigm accomplished by the specific dimensions of Urban Water Security and Resilience
- The application of the assessment framework is not restricted to a certain scale
- It is up to now the only global framework that had been applied twice and officially endorsed to monitor changes at continental scale. A new release is in prep for 2020.
- Clear development history and integration of experience of leading research institutes

Box 2 Key advantages of the 2016 AWDO assessment framework

Utilizing the modular concept of the 2016 AWDO approach allows the restriction on a single Key dimension. The Key dimension 2 (economic Water Security) had been chosen for this study, as it offer a systematic Water Stress characterization and provides the most relevant linkages to a potential wastewater reuse. Within the Key dimension 2, Economic Water Security, the characterization of Water Stress is here an intrinsic and explicit part of the assessment. Given the related and inverse nature of Water Security and Water Vulnerability, a characterisation of Water Vulnerability is included implicitly.

A detailed description of the methodology can be found in AWDO (2016) and results of its application in AWDO (2016 b).

Introducing the use of anchor indicators to enable a transfer of information across different scales

The scale at which Water Security should be analysed depends largely on the aim and the leading policy question at hand. An analysis of hot spots and identifying priority areas for future interventions demands detailed analyses within a country. A promotion of policies to stimulate the principle implementation of measures requires instead an assessment of possible effects at national scale. A comparison between countries at sub-national scale can be done, if the number of metrics to be compared remains small. Understanding the complex nature of Water Security and the large number of sub-indicators to be included, favours hence a comparison of aggregated information at national level.

In this context, Water security studies are implemented at a wide range of individual scales, and it is difficult to route findings from one scale to the other. However, once there is a need for assessing the impact of future wastewater reuse interventions at national scale (as policymaking relevant scale) ways must be explored to combine analyses at the different scales and to

- To enable a transfer of information gained from one scale to the other
- To consider the different data availability and accessibility at the different scales.

Defining a subset of indicators as *anchor indicators*, which can be consistently applied at all relevant scales can help to route information across the different scales. The challenge remains to deal with the different availability of data for calculating such indicators. However, any indicator-set represents only partly the reality. Following from the premise, there are no objections to concentrate the calculation on a restricted number of anchor indicators. Where necessary, specific aspects can be then investigated in supplementary analysis at each relevant scale. Nevertheless, more experiences need to be gained in utilising anchor indicators for linking such heterogenic and context specific assessments. The 2016 AWDO assessment framework with its modular set up offers a suitable outset to demonstrate the use of anchor indicators in a nested approach.

3.1.2 Principle approach applied within this study

Nested approaches had been widely applied in science to overcome the challenges of dealing with different information availability at temporal and spatial scales.

The characterization of Water Stress and Water Security as presented in this study follows a nested approach using selected indicators from the 2016 AWDO assessment framework. It combines both the elaboration of Water Stress related indicators at subnational scale as well as the subsequent aggregation of information for describing the Economic Water Security at national scale.

In this context the *intra-annual rainfall variability*, the *inter-annual rainfall variability*, the *drought duration length index* and the *water exploitation index* as being used within the 2016 AWDO framework had been chosen as anchor indicators. Those indicators were used both at sub-national level to allow spatially distributed analyses, as well as at national scale to calculate the Economic Water Security Index.

In this way, information at sub-national scale are used to identify priority regions for future measures to advance Water Security. Calculating the Water Security at national scale instead helps to relate the situation and possible measures to other relevant socio-economic information.

While the presented study is restricted on the Economic Water Security, the principle approach can be applied to the investigation of other Key Dimensions. This would become relevant if the thematic context differ from wastewater reuse and should instead give, more emphasize on social, urban or environmental water challenges.

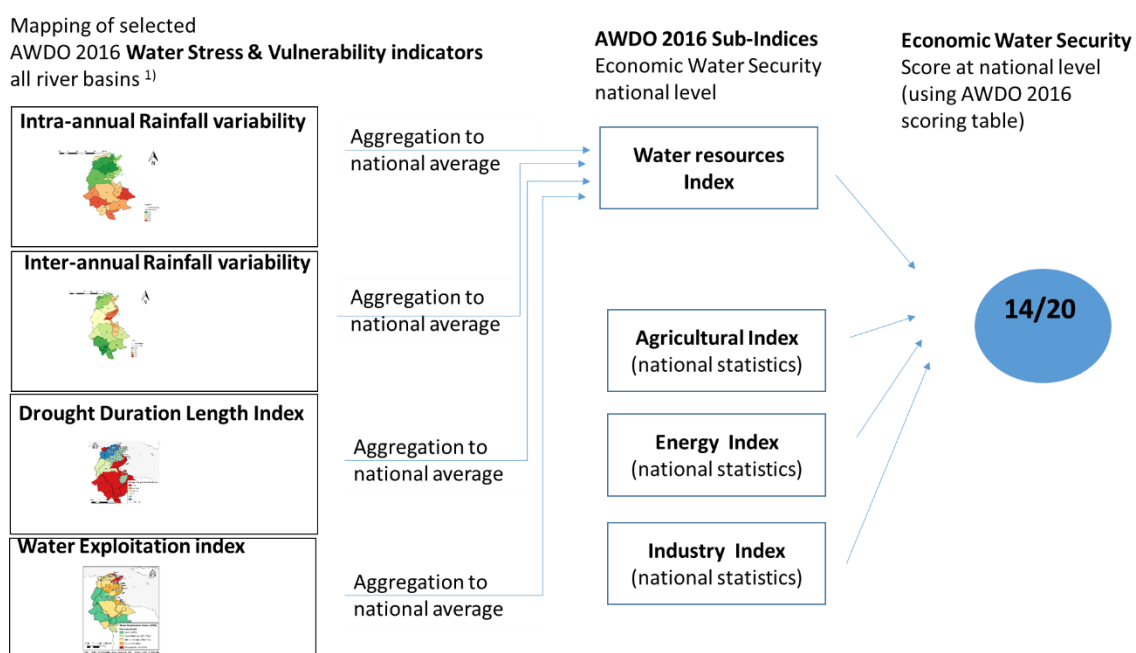


Figure 2: Combining the spatial distributed information to characterize Water Stress at subnational scale

For the calculation of the rainfall variability and the drought length, gridded information from global databases were available. For the indication of total renewable fresh water resources and the total freshwater withdrawal, information at the WRI database were globally available at river basin level. The indicators intra-annual rainfall variability, the inter-annual rainfall variability; the drought duration length index and the water exploitation index have been elaborated for all river basins in Morocco and Tunisia. Given the particular hydrography in Egypt, the calculations in Egypt were done for major irrigation areas instead of sub-catchments.

As an ensemble, these indicators provide already a basic characterization of the principle Water Stress condition and depict relevant aspects for the Water Vulnerability (variability of rainfall, vulnerability against droughts and the degree of water exploitation).

In a subsequent step, the results have been aggregated to an indicator at national scale using area weighted means. The results had been fed into the calculation of the Economic Water Security at national level. For the calculation of the *Economic Water Security Index*, the *Agricultural Water Productivity*, the *Industrial Water productivity*, and the *Energy Water productivity* also is considered. At this stage, data for the calculation of the Agricultural Productivity, the Industrial Water Productivity and the Energy Water Productivity were not available at the level of river basins. Therefore their calculation was restricted to the national scale using information from global databases.

At the end, the final Economic Water Security Index have been calculated using the 2016 AWDO score tables as a single number at national scale.

In this way, the nested approach allowed both a spatially differentiated analysis of Water Stress relevant information as well as the consideration of wider socio-economic factors for the characterisation of the Water Security situation. As soon related socio-economic data could be also provided at the level of river basins, a similar investigation at basin scale with the subsequent aggregation at national scale could be realised.

3.1.3 Water Stress Indicators at Subnational scale

The hydrological catchments are extracted as vector data from the Global Drainage Basin Database (GDDB) (Masutomi et.al, 2009). The catchments are defined as areas of land that drain to a single outlet point (Gassert et.al, 2014). All basins within the specific country context are considered. The vector data is used as input for the inter, intra-annual and drought duration.

In order to provide a clear overview about the historical variability of the rainfall pattern at subnational scale, both inter and intra-annual rainfall are mapped for the three countries. Monthly and yearly rainfall data are extracted from Climate Hazards Group InfraRed Precipitation with Station data CHIRPSv2.0 (Funk et al., 2015) on a 0.05-degree resolution for the years 1981 up to date (2017) was used to estimate the current Inter and Intra-annual rainfall variability. CHIRPS is a quasi-global rainfall dataset with more than 30 years of data. It incorporates satellite images with stations on the ground to create gridded rainfall time series (Funk et al., 2015).

In all cases, data was processed with the software R.

3.1.3.1 Inter-annual rainfall variability

The Inter-annual variability is calculated by the coefficient of variation from long-term time series on mean annual precipitation.

$$Cv,a = \sigma_{\text{mean annual precipitation}} / \mu$$

Where Cv,a is the coefficient of variation; σ is standard deviation and μ is the mean annual precipitation (mm) over the period to be considered. Subsequently, grid information was summarised at basin and national level per country.

3.1.3.2 Intra-annual rainfall variability

The intra-annual variability is calculated by determining the variability between long-term average monthly precipitation data. The same data source and method is used as for analysing the inter-annual rainfall. The major difference is that the intra-annual rainfall, the variation within the year is collected and not between the years.

$$Cv,m = \sigma_{\text{monthly precipitation}} / \mu$$

where:

CV is the coefficient of variation;

σ is standard deviation and

μ is the monthly precipitation (mm).

$$\sigma = \sqrt{\frac{\sum_{i=1}^{12} (P_i - \mu)^2}{\mu}}$$

3.1.3.3 Storage ratio - Storage capacity related to the Total Renewable Water Resources

In the case of both a high inter-annual variability as well as a high intra-annual variability of rainfall, a sufficient storage capacity contributes to a higher Water Security for economic uses. "A higher ratio of storage to total renewable water resources indicates that a country is more resilient to changes. Conversely, a higher rainfall coefficient of variation and lower ratio of storage to total renewable water resources indicate that a country is less prepared for water fluctuations (AWDO 2016)"

The storage ratio related to the total renewable water resources, SR is calculated as

$$SR = C_t / TRWR$$

with:

C_t : total storage capacity within a region of consideration (km^3)

$TRWR$: total annual renewable freshwater resources within a region of consideration (km^3)

Location and volume of major dams (bigger than 20 Mm^3) is extracted from the Geo-referenced database of Aquastat (FAO Aquastat, 2016). The location of some missing dams in the database was updated by using Google Earth.

The principle design of the indicator allows the consideration of multiple types and scales of storage systems (large dams, small dams, drainage canals, aquifers, recharged groundwater), as it only considers the total storage capacity within a unit. However, for the comparability of results between countries or at different scales (national, watershed, and political unit) it is necessary to consider the type storage systems in a consistent way. Unfortunately, studies on small dams are merely reported at few mostly smaller research sub-catchments and often not for the entire country.

The 2016 AWDO report only considers the storage capacity of surface waters in larger dams available for the respective country. The contribution of groundwater water resources as storage for rainfall is not considered. Likewise, using the FAO AQUASTAT (2015) data on the total country's dam capacity does not

consider the contribution of small dams (e.g. barrages collinaires), which provide an important element at local level to buffer intra-annual fluctuations in the water availability. In the case of reusing water from drainage canals, such canals represent also systemic storage capacity in the water cycle and further investigation should be done to include such aspects in the assessment of Water Security as well.

One of the key challenges for a meaningful calculation is to consider the actual available storage volume. In this view, siltation losses or dead volumes of large dams can sizably reduce the storage capacity in comparison to the original design capacity or to the reported total volume from building contracts.

Due to the dynamic development and the building of new dams, even statistics at country level may differ significantly from source to source.

The Total Renewable Water Resources (TRWR)² (ressources en eau renouvelables) provides an estimate of the maximum theoretical amount of water resources in a country (FAO Aquastat, 2016) and comprises the average annual natural inflow and runoff that feed each hydro system (catchment area or aquifer). It consists of the internal renewable water resources (km³/year) and the external renewable water resources, flowing from outside into the unit of consideration.

The TRWR does not indicate how much water is actually available for a sustainable consumption. Water resources for a sustainable consumption may remain after subtracting the amount that is required to maintain the aquifer recharge, to maintain a minimum of ecosystem functioning, and to keep a certain outflow related to the commitments made to downstream users.

Data from the AQUEDUCT database (Gassert et al., 2014) is used to derive TRWR at basin level. For this, the total blue water, defined as natural river discharge at the outlet point of a basin, is considered.

In case of Egypt, TRWR and storage ratio have not been mapped at basin level. Around 96% of the TRWR is contributed by the flow of the Nile river, which is according to the Nile Waters Agreement of 1959 between Egypt and Sudan 55,5 km³. The water, regulated by the Aswan reservoir, is subsequently distributed to the different irrigation districts. Having a uniformed value within the Nile valley, the calculation of indicators at subnational level is not meaningful.

3.1.3.4 Water Exploitation Index

Within the 2016 AWDO framework, the total Water Stress on freshwater, is defined as the total amount of water abstracted from freshwater sources for human use related to the TRWR. This ratio also known as Water Exploitation index and in the further reporting referred to as WEI.

$$WEI = W_w / TRWR (-)$$

with:

W_w : total annual freshwater withdrawal (km³)

TRWR: total annual renewable freshwater resources within a region of consideration (km³)

While a high Water Stress implies risks in the Water Security, a lower fraction of abstracted water resources reflects greater Water Security for economic growth and production.

The data for the TRWR is available at national scale at the World Bank. The data on the river basins and Water Stress is available at the World Resources Institute WRI database.

A different approach is used for Egypt. Here the WEI is calculated on the base of the total agricultural withdrawal for Egypt. Water withdrawal for agriculture is calculated at irrigation unit level by estimating the average ET of major crops per unit and the water application efficiency. Subsequently, urban and

² UNESCO IHP refers to Total Actual Renewable Water Resources- TARWR

industrial consumption is added to these units by multiplying the population located in each unit by the national average water consumption per capita. These are mostly located alongside the Nile and the rest of the irrigation units are fed by groundwater.

3.1.3.5 Storage – Drought (Duration) length index

The drought duration is calculated to give the average length (in months) of a drought that was moderate, severely and/or extremely dry in intensity as given by the Standardized Precipitation Index (SPI) (Svoboda et al., 2012). The Standardized Precipitation Index (SPI) is a widely used index to characterize temporal aspects of meteorological droughts. The SPI values can be interpreted as the number of standard deviations by which the observed anomaly deviates from the long-term mean, as is calculated as:

$$SPI = (P - P^*) / \sigma_p$$

With

P: precipitation (mm)

P*: average precipitation (mm)

The occurrence of a drought event is referred to any time, where the SPI is continuously negative and reaches an intensity of -1.0 or less. First, for every month, the 1-month SPI was calculated. Next, the number and duration of droughts, when SPI was equal to or smaller than 1, was recorded. Finally, the duration of droughts was averaged.

As for the inter and intra-annual variability, the drought duration is spatial-explicit calculated from the rainfall information from the database CHIRPS v2.0 on a 0.05 degree resolution for the years 1981 up to date (2017).

The AWDO framework adopted the storage drought-duration length (SDL) index from (Eriyagama et al., 2009). This index expresses the capacity to cope with droughts. "A higher proportion of months with reliable water supply indicates greater Water Security for economic activities." (AWDO, 2016). It first determines the duration how long the storage capacity in a country (Ct) is sufficient to supply average monthly surface water withdrawals (W_m). This duration is then related to the average drought duration in months.

The Storage-Drought duration length index SDL is calculated as

$$SDL = (Ct / W_m) / DDM \text{ (-)}$$

With

Ct: Storage capacity in a country (km³)

W_m: average monthly withdrawal (km³/ month)

DDM: average hydrological drought duration (months)

This index can be understood as extending a merely meteorological consideration of droughts with relevant managerial aspects. Concerning the storage capacity, the same remarks on actual available capacities, as stated above, does apply are here as well. The other challenge in considering the storage capacities to cope with droughts is that the Water Security depend to a large extend from the filling status of the storages. Especially in periods of consecutive dry spells and repeating droughts, the water available in the dams is at minimum and far from the reported minimum.

3.1.4 Calculating the Economic Water Security at National scale

As stated above, the Key Dimension 2 – Economic Water Security offers a suitable framework to depict the interplay between Water Stress and efforts to increase the agricultural water productivity as e.g. by the introduction of high value crops, efficient irrigation and the potential reuse of waste water. The approach for calculating the Economic Water Security as Key dimension 2 of the AWDO 2016 framework has been developed by IWMI.

According to its composition, the index Economic Water Security can be usefully applied when the situation to secure water for the agriculture, the electricity production and the industrial production should be assessed against the threats and factors that potentially improve Water Security over time. The use of the economic Water Security index system as a stand-alone assessment had been also demonstrated by (Holmatov et al., 2017), who had applied the Economic Water Security to the countries of the SADC region.

The 2016 AWDO key dimension *Economic Water security* is based on the performance of four sub indicators—a general one and three specific sector sub-indicators. Which can be seen in table 1. Each of this four indicators is composed by other sub-indicators. In total, three levels of sub-indicator and the final score AWDO could be identified (Figure 3).

Table 1 Sub-indexes Economic Water Security

Sub index	Description
Water resources Index (Broad economy)	describing the general water-related boundary conditions for the use of water for economic purposes,
Agriculture Index	indicating water productivity in agriculture and food security
Energy Index	indicating water productivity in energy generation and energy security, and
Industry Index	indicating water productivity in industry

The Economic Water Security is calculated by using a simple average from the corresponding Sub-indicators (Figure 3):

$$\text{Economic Water Security} = (\text{Water Resources Index} + \text{Agriculture Index} + \text{Energy Index} + \text{Industry Index}) / 4 (-)$$

The result is of scalar dimension in the range between 0 and 20.

The consideration of Agriculture, Energy, and Industry within the Key Dimension Economic Water Security relates very much to the water, food, energy and security nexus reflection, but addresses specifically the water related issues. Within the nexus debate, food security is wider understood than just Agricultural Water Security. According to (Lautze and Manthrilake, 2012), food security depends on crop selections, the distribution, and provision of those crops in a time-appropriate manner. In this context, the Agriculture Water Index can help to reflect, to which extend sufficient water resources would be available for enabling a stable food production. The Industry Water Productivity depicts the maturity of a society to use water efficiently in industrial production. The 2016 AWDO assessment framework assumes, that as higher the productivity is, as more the society is able to plan and to safeguard the water supply for industrial production. The same principles apply for the energy water productivity.

It should be noted that for all the sector related indices (i) Agriculture, (ii) Electricity production and (iii) Industry, results are specified in relative terms. The calculation of water productivity does not reflect the actual total consumption. Absolute volumes of withdrawals and their share from TWRW is covered instead via the sub-index Water Stress as part of the sub-index Broad Economy.

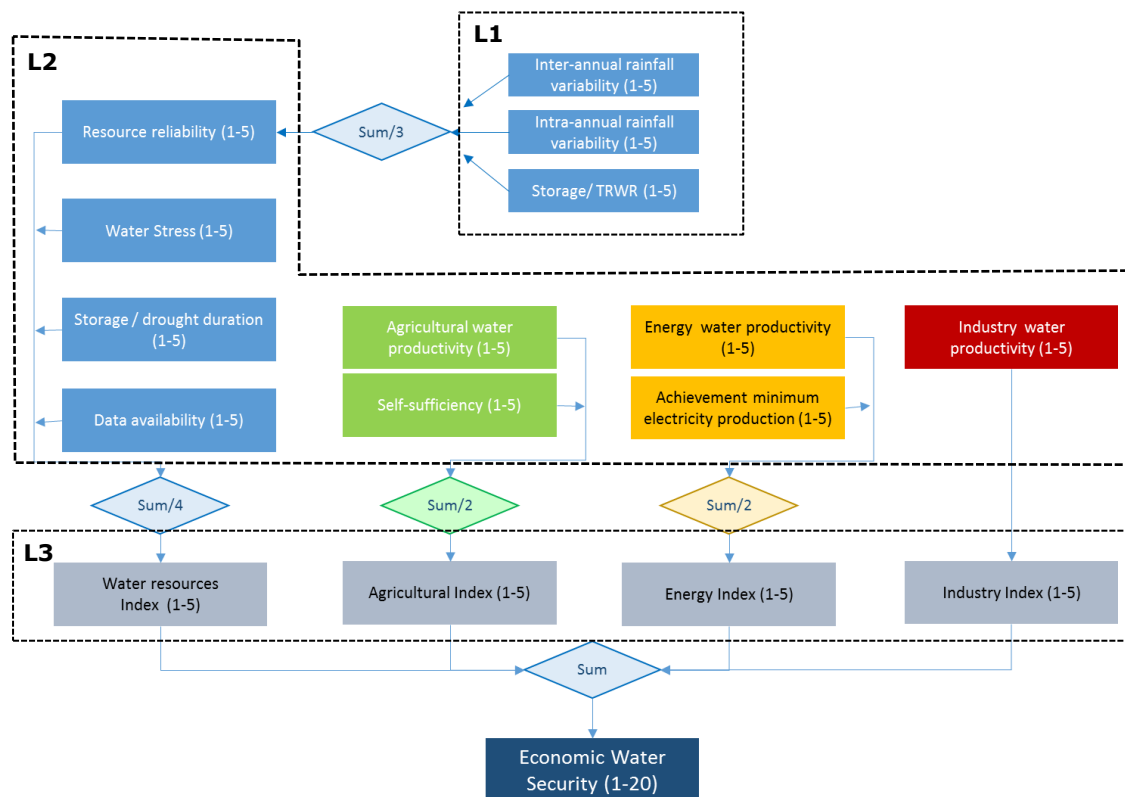


Figure 3: Index/ Sub-index Structure and calculation of the 2016 AWDO Key dimension II- Economic Water Security (taken from AWDO, 2016). L1, L2 and L3 refers to the three levels of sub-indicators of the AWDO methodology.

3.1.4.1 Sub-Indicator – Water resources Index (broad economy)

With the sub index Broad Economy, the 2016 AWDO framework summarizes the key aspect for ensuring a reliable water supply to the broad economy. However, the term *Broad Economy* could be confusing, as it might suggest that economic data are provided. Therefore, the Sub-indicator Broad Economy is herein-after referred to as Water Resources Index that describes

- How certain is the availability of rainfall?
- How long can one stand periodical shortness?
- To which extend is water consumption already close to an overconsumption?
- Is the focus area sufficiently equipped with information to indicate shortages and to underline corrective measures?

The Water Resources Index is a compound out of the sub-indices Resource reliability, Water Stress, and Storage Drought Duration Length Index. Each sub-index was calculated after aggregating the information at national scale. Multiplying the sub-index with the related AWDO score factors S_i and considering the Index Data availability, the Water Resources Index is obtained by simple average:

$$WR = ((Cv,a \times S_{Cv,a} + Cv,m \times S_{Cv,m} + SR \times S_{SR})/3 + WEI \times S_{WEI} + SDL \times S_{SDL} + Data\ availability) / 4$$

For the sub-index Data Availability, the 2016 AWDO framework applies a simple checklist. This list reflects the principle availability of data to support proactive development adaptive measures. The data availability

is measured by the degree to which data were generally available to populate the economic Water Security indicators. The checklist comprises eight specific data sets. The association to the scores consider the availability of 4 out of 8 data sets as lowest and increase the score with any additional data set available (see also AWDO, 2016).

3.1.4.2 Sub-indicator - Agricultural Index

The enormous relevance of water to secure the food production within a country is widely understood in science and policymaking. Agriculture was a longer time not high on the agenda, but both the milestone report Water for Food – Water for life as result of the comprehensive assessment of water in agriculture and a series of food crisis underpinned the utmost importance of agricultural water management. Agriculture is not only a strong backbone and a nucleus to advance national economies, but especially in rural areas, a vitally factor to maintain employment and a quality of life.

Within the Sub-Indicator Agricultural Index, the 2016 AWDO framework considers two dimensions. Firstly, the Agricultural Water productivity WP_A , as the degree to which extend there is a readiness of the sector to use the scarce resource in an efficient way. Secondly, the Self-sufficiency in Agriculture, depicting the resilience of the agricultural sector against shocks and temporary production shortfalls. Within this study, the calculation of the Self-sufficiency in Agriculture is omitted as the underlying assumption is somehow incomprehensible. More evidence should be gathered that a higher self-sufficiency indeed would reduce the resilience against water scarcity.

AWDO 2016 determines Agricultural Water Productivity by associating the agricultural gross domestic product to water consumption for the agricultural production.

The water productivity in the agriculture sector is calculated as:

$$WP_A = GDP_A / \text{AgrET} (\$ \text{ million} / \text{km}^3)$$

with:

GDP_A : agricultural gross domestic product (million \$)

AgrET : agricultural evapotranspiration (km^3)

According to the AWDO 2016, higher agricultural water productivity indicates a higher Water Security. Increasing the agricultural water productivity coincides with either increasing the production, which reflect skills in farming and/ or in skills to reduce the unproductive losses.

At national scale, information of agricultural value-added can be obtained from databases such as provided by the World Bank. Data on the Agricultural Gross domestic product AGDP are partly available at sub national scale.

Within this study, reported figures on the Agricultural productivity had been obtained from the Aquastat database.

Using the 2016 AWDO score tables, the Agricultural Index is simply obtained by multiplying the Agricultural Water Productivity with its related score factor.

$$\text{Agriculture Index} = WP_A \times S_{WP_A}$$

3.1.4.3 Sub-Indicator - Energy Index (in terms of Electricity)

Until now, agriculture is frequently reported to be the biggest consumer of freshwater resources. However, especially in North Africa there is a huge demand to increase the energy production for cooling, information

exchange, industrial processing and transport. A development that will be even further stimulated by the ongoing digital development in societies.

The 2016 AWDO framework considers two aspects for defining the Energy related Water Security

- The estimation how efficient the water is used to produce energy (Energy Water Productivity) and
- The estimation how far the energy production is already developed in comparison to other countries in the study region (Achievement of Minimum Platform for Electricity Production)

The Energy Water Productivity WP_E is measured according to the 2016 AWDO framework as the total electricity production related to the quantity of water consumed in all categories to produce that electricity.

$$WP_E = P_E / WR_E$$

with:

P_E : Electricity production (GWh)

WR_E : Water resources consumed (km^3)

The 2016 AWDO framework used the IEA categories (IEA 2015) on country's electricity production from coal, oil, gas, biofuels, waste, nuclear, hydro, geothermal, solar photovoltaic, solar thermal, wind, tide and the IEA 2012 data to determine the electricity production per category.

The water consumption to produce the electricity in each category had been determined at national scale. For each category the median water consumption instead of extremes were considered. For calculating the water consumption for producing electricity from both biofuels and biomass, data from (Gerbens-Leenes, et al., 2008) were used.

The degree of development in power production related to the per capita average electricity production is called within the AWDO 2016 framework "Minimum platform for electricity production".

As higher, the spread to the average energy production in the region is, as lower, the Water Security is assumed. According to AWDO 2016, regions with an electricity production lower than average electricity production are likely to develop more capacities in the future, which would result in an increase of water consumption correspondingly.

The Minimum platform for electricity production MP_E is calculated as

$$MP_E = 1 - \left(\frac{\overline{P_{E, cap}} - P_{E, cap}}{\overline{P_{E, cap}}} \right) (-)$$

with:

$\overline{P_{E, cap}}$: Average per capita electricity production in the region (Gwh/ cap)

$P_{E, cap}$: Per capita electricity production in the specific location (Gwh/ cap)

It is important to note that this approach is assessing only water consumption food prints from the running operations. Water consumption from establishing the plants are not considered here.

A relevant question to apply the Minimum platform for electricity production at national scale is to define, which neighboured countries are chosen to define the average per capita production. Especially looking to the Mediterranean African Countries, comparing Egypt, Libya, Morocco, Tunisia, and Algeria would result

into a different result than as extending the comparison to the MENA countries and hence including countries as Qatar and the United Arab Emirates. Yet, other results would be obtained when considering the average of the Circum-Mediterranean group of countries, sharing similar climate and hydrological conditions. More important than the absolute numbers, is to analyse to which extent there is a gap in energy production according to the regional average and what is the likely future demand and development.

The final Energy Index is obtained by a simple average from both components and the AWDO scores respectively

$$\text{Energy Index} = (WP_E \times S_{WPE} + MP_E \times S_{MPE}) / 2$$

3.1.4.4 Sub-Indicator – Industry Index

The industrial water consumption can make up a significant share in some industrial areas (even extending the agricultural water use) while in other, often rural regions, it can be completely negligible.

The 2016 AWDO Framework is considering the Industrial Water Productivity only. The metric gives an indication on the maturity of local industries to invest in water saving production processes, recycling or the attraction of industrial sectors that are using less water anyway.

The industrial water productivity WP_I can be calculated as

$$WP_I = GDP_I / WR_I \text{ (\$ million/km}^3\text{)}$$

with:

GDP_I : Gross Development product in Industry (\$ million dollar)

WR_I : Water withdrawal for industrial consumption (km³)

Using the 2016 AWDO Score factors the Industry Index is obtained as follows

$$\text{Industry Index} = WP_I \times S_{WP_I}$$

3.1.5 Integration of results from analyses at sub-national and national scales

The results from the detailed Water Stress evaluation at sub-national scale and the relative scores of the 2016 AWDO sub indicators can be used to embed decisions for prioritising wastewater reuse options into a wider context.

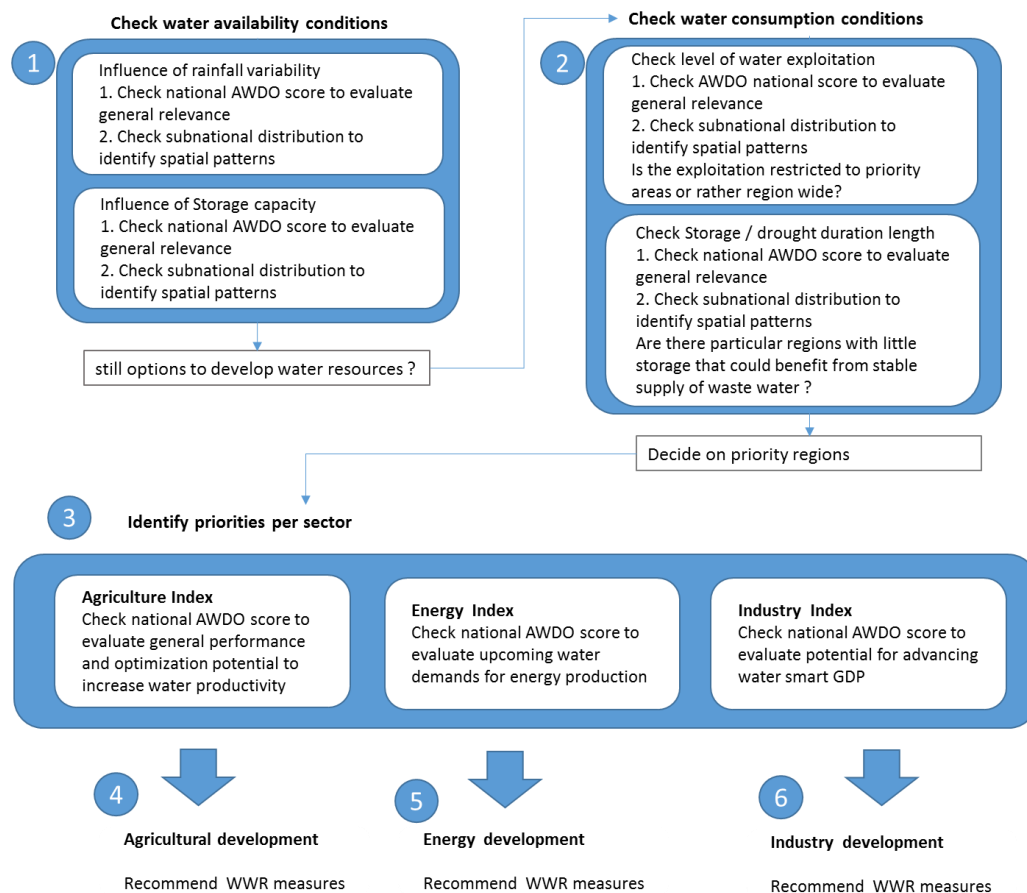


Figure 4: Decision making tree to prioritise wastewater reuse interventions to increase Water Security

Figure 4 provides a stepwise decision support. In a first step, the basic availability of water resources in terms of rainfall variability and storage capacities is assessed. This gives information to which extend the further development of water resources is a reasonable option or not.

In the second step, one can assess the spatial variability on the water demand side. Here the AWDO scoring can help to indicate a general severity of the situation, while the spatially differentiated analyses are used to analyse the priority areas.

In a final step, the AWDO scores on the different sectors are used to embed the planning of interventions first into a multi sector perspective. While additional in depth socio economic studies might be required to get more insights that are specific. The general information that can be obtained from the AWDO framework already gives a useful first orientation.

3.2 Characterising Water Stress and Water Security in Morocco

With a TRWR of around 29 km³/year (66% surface water, 34% groundwater), the total water withdrawal of Morocco is estimated in around 10.6 km³/year, most of them dedicated to agriculture (86%), following by the urban (10%) and industrial (4%) sectors (FAO, 2016). For the population an average of around 878.8 m³/year is available to satisfy their freshwater requirements. This figure is far lower than the world-wide average, estimated in 6000 m³/year, but slightly higher than reported for the neighbouring countries, estimated in 287 m³/year for Algeria and 98 m³/year for Mauritania (FAO, 2016).

3.2.1 Mapping Water Stress at Sub-national level

The national figures hardly reflect the unequal distribution of the water resources across the territory and along the year. Within this section, relevant information to characterize the Water Stress at sub-national level are provided. The information is depicted for the individual river basins of Morocco.

3.2.1.1 Temporal reliability of water resources

A country's economic activities are more assured when the rainfall is less erratic and if there is enough storage to assure reliable and timely supply.

The inter-annual distribution of precipitation is essential to understand water availability and potential water scarce issues, since fresh water is usually required at a specific time and location.

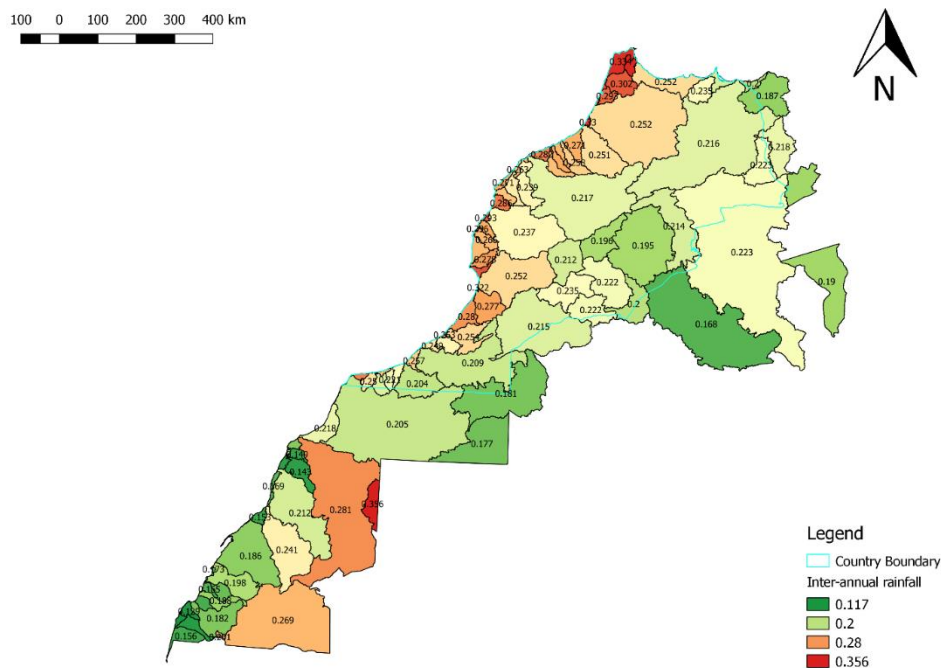


Figure 5: Inter-annual rainfall variability, Morocco, current conditions

The values for the inter-annual rainfall varies between 0.117 and 0.356 (Figure 5). Higher inter-annual variability of precipitation is given for the watersheds close to the coast, more affected by the Mediterranean climate, than the watersheds coming from the mountainous Rif more constant regarding annual rainfall. Actually, these watershed receives most of the water resources of the country (see also map 4), which implies a lower risk of water scarcity also for the downstream basins.

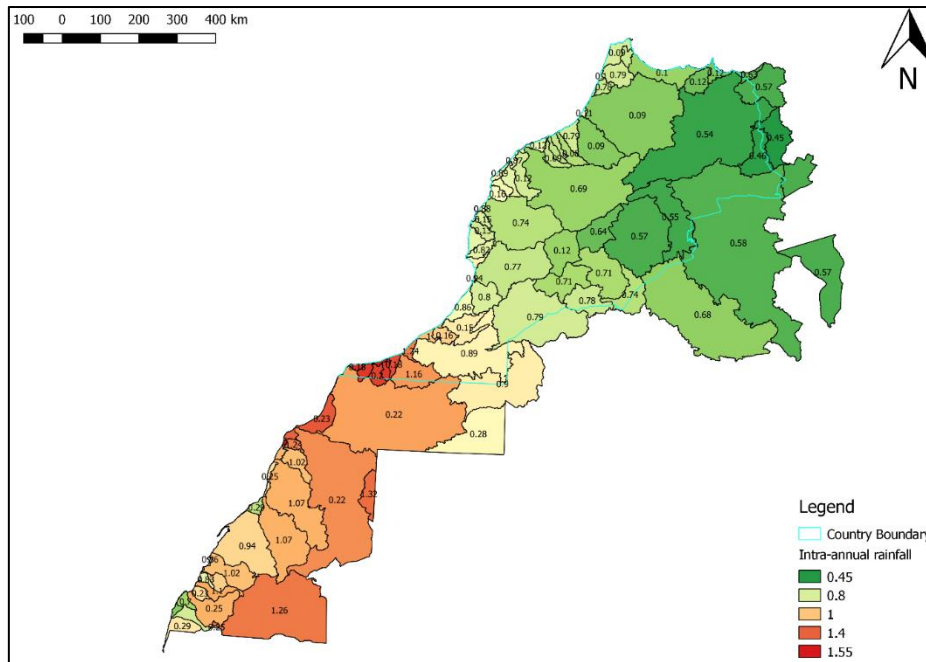


Figure 6: Intra-annual rainfall. Morocco, current conditions

Intra-annual variability or rainfall is also an important indicator to cope with water scarcity, especially for rainfed agriculture, since it indicates the distribution pattern of precipitation across the year; the values vary between 0.45 and 1.55, indicating a higher variability, with most of the precipitation located in certain months (Figure 6). As for the inter-annual rainfall variability, the lower values for the intra-annual rainfall variability are located in the Rif's basins.

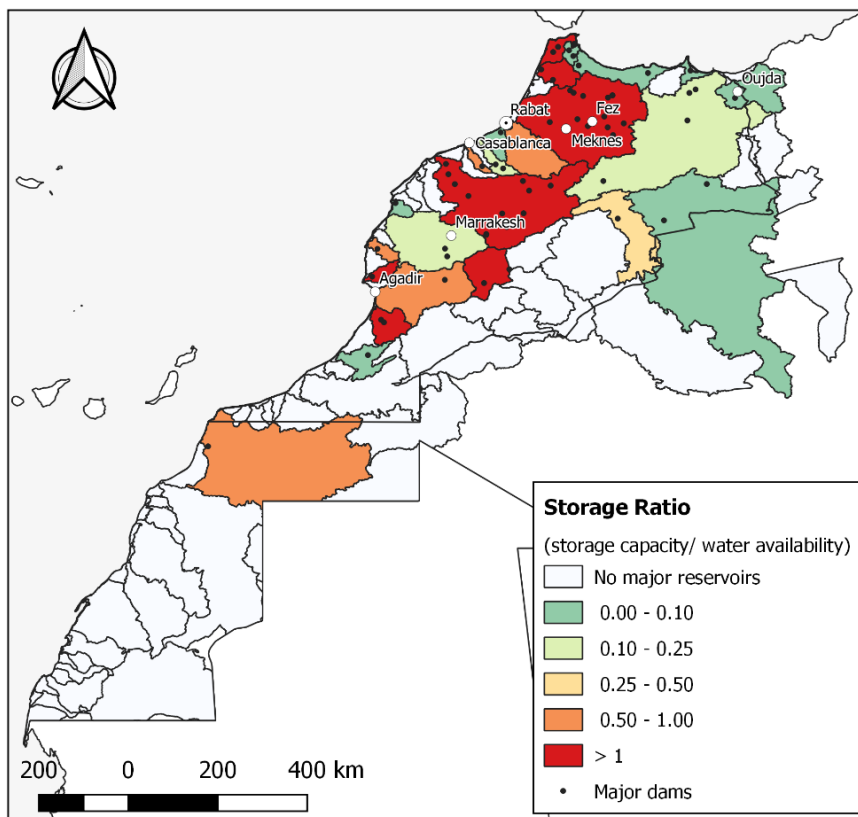


Figure 7: Storage ratio, Morocco, current conditions

The relation between the storage capacity of a basin and water availability (flows) provides a good insight about the capacity of this basin to satisfy the water withdrawal of the different economic sectors, limiting the impact of water shortage during the dry periods. In average, the storage ratio of Morocco is high. In some basins, the storage capacity is higher than the annual water availability (values higher than 1), which means, these basins are able to storage water from different years, limiting the risk of water shortage during dry periods Figure 7.

3.2.1.2 Water Stress

Water stress is characterised by the Water Exploitation Index (WEI). The TRWR of Morocco are unequally distributed. However, the largest contribution comes from the rivers of the Rif area in the northern part of the country (Figure 8). Three basins count with more than 3 km³/year, gathering between the three around 33% of the TRWR of the country.

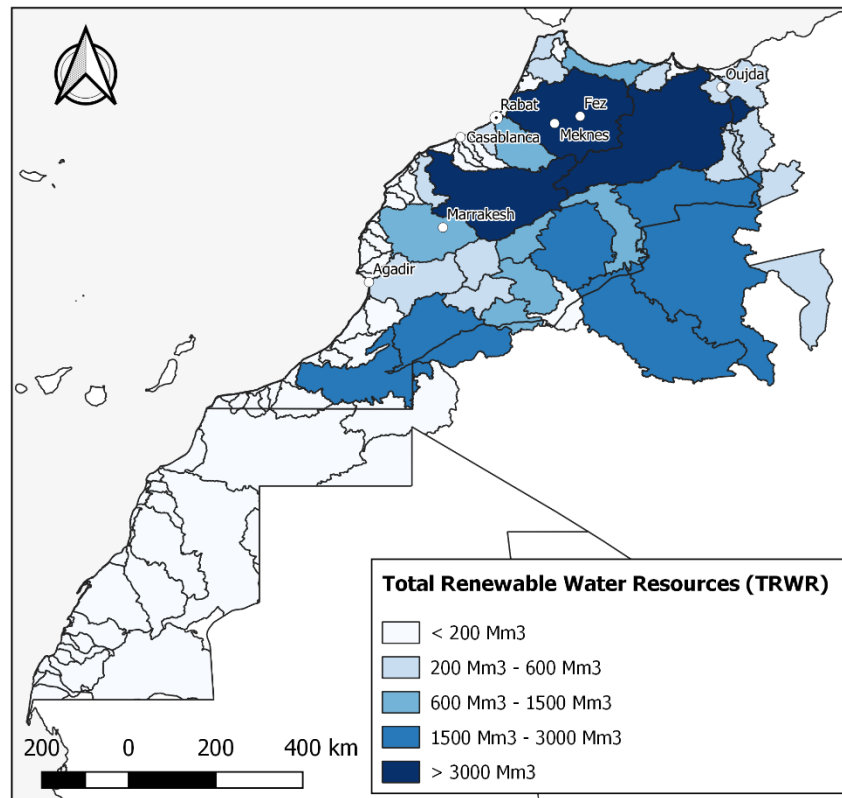


Figure 8: Total Renewable Water Resources, Morocco current condition

As the TRWR, most of the water withdrawal is also located in some specific areas. Since around 86% of the total water withdrawal is related with irrigated areas, their spatial distribution indicates the location of the highest water withdrawals. Figure 8 clearly shows this relation, where only few basins comprise a water withdrawal higher than 2 km³. However, also some coastal basins suffer a high water withdrawal because of the high pressure of large cities.

Combining the information from above, the WEI map is constructed. This map (Figure 10) clearly shows several basins suffering from a high or extreme Water Stress. In these basins, more than 40% of the TRWR are used, mainly for agriculture. In some basins, this value is higher than 80%, being water withdrawal almost the same or even higher than the TRWR. In the latter, an overexploitation of fresh water resources (mainly groundwater) is identified.


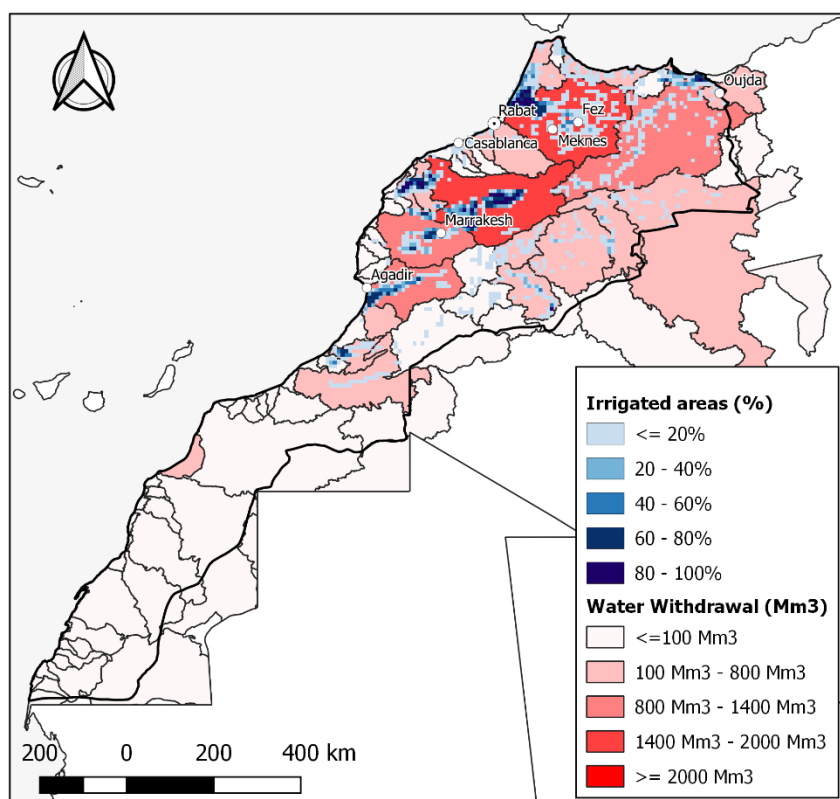


Figure 9: Water Withdrawal and location of irrigated areas, Morocco, current condition

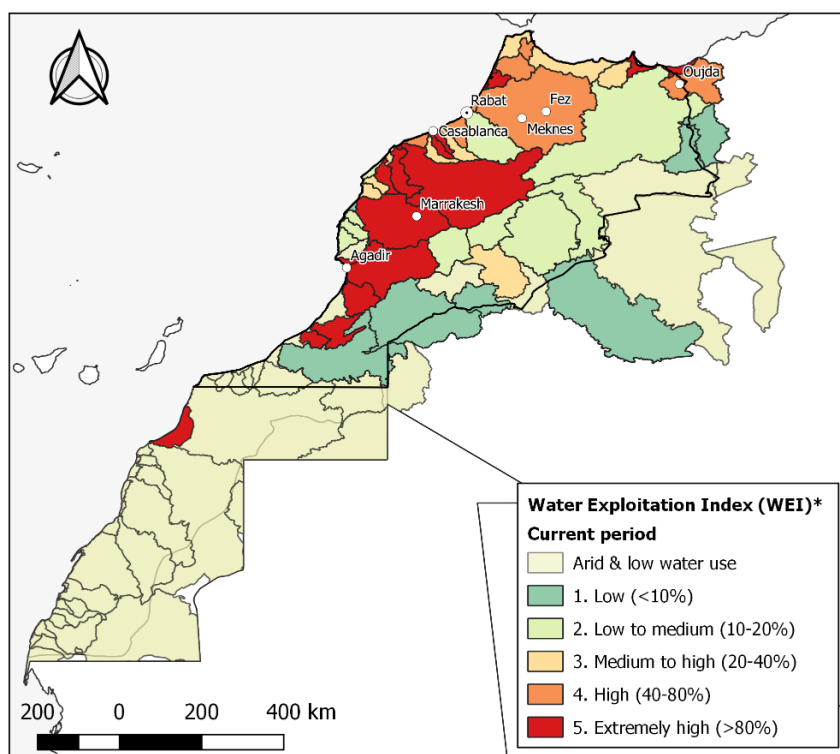

*WEI - Water exploitation index measures total annual water withdrawals (municipal, industrial, and agricultural) expressed as a percentage of the total annual available water

Figure 10: Water Exploitation Index, Morocco, current condition

3.2.1.3 Storage Drought Duration Length Index (SDL)

The SDL index expresses the capacity to cope with droughts. As Figure 11 shows, the coastal basins, more influenced by Mediterranean climate, suffer longer droughts than the basins located in the mountainous areas of the centre of the country.

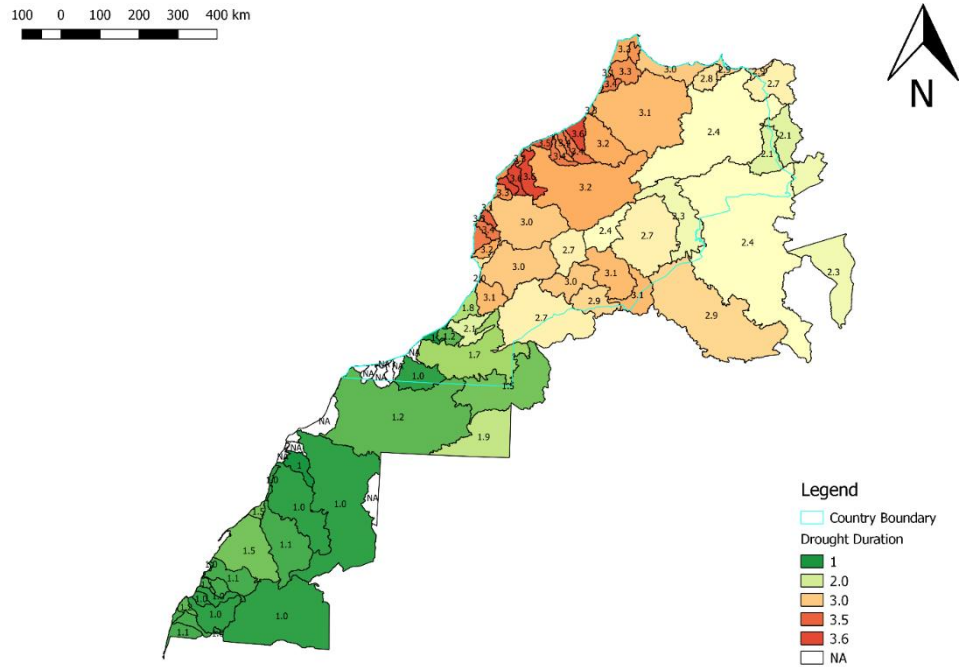


Figure 11: Drought duration, Morocco, current condition

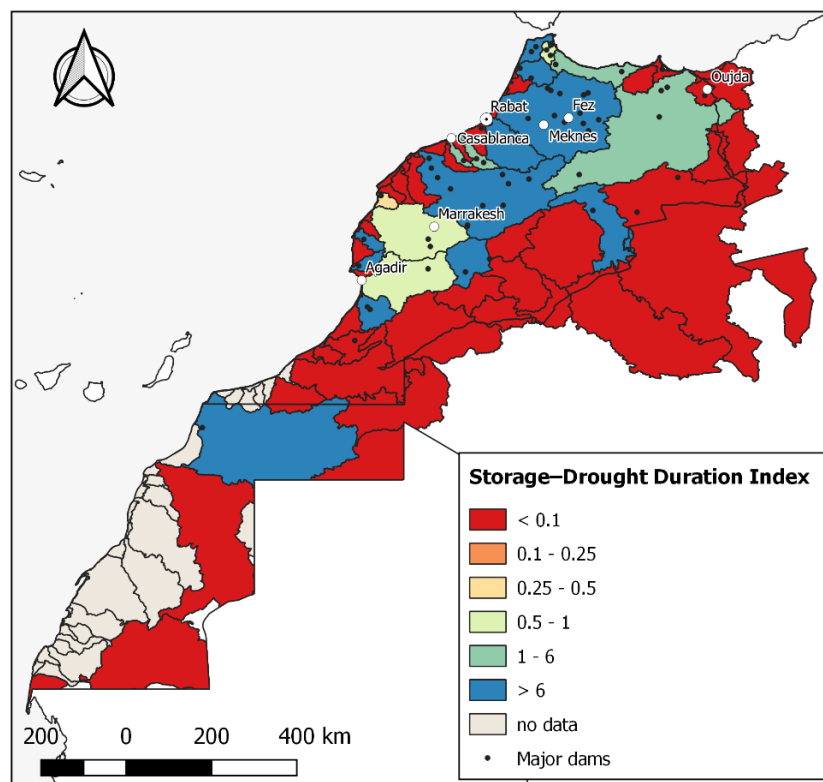


Figure 12: Storage-Drought Duration Index, Morocco, current condition

The calculation of the SDL reveals that in regions with available dam capacity, to some extent a drought resilience might be given.

3.2.2 Assessing Economic Water Security at national scale

An assessment of the Economic Water Security at national level following the AWDO approach can be found below. This assessment provides an overview to which extent a country is able to satisfy the need of water for the economic sectors (food, industry, and energy). Higher values of the index indicate a better capacity of the country to satisfy the need of water for the economic sector, while lower values indicate a poor capacity.

It could be stated that Morocco, with an Economic Water Security Index of 13.33 (max 20), is only partly able to provide enough water to satisfy the economic sector and the water productivity in economic activities is acceptable (Table 2). Considering the fact that the large dropping of aquifer levels in Morocco had not been included in the indicator systematic, the actual situation is even worse.

An in-depth analysis of this index indicates that both the energy and broad economy index keep down the result. On one hand, the low water productivity in energy and the fact that the country is far below from the average energy per capita production for the applicable countries reduced the energy index score. The low energy water productivity is mainly related to the significant share of evaporation losses from the large hydropower dams

On the other hand, the large inter and intra-annual rainfall variability at national scale, which affects directly the reliability index and the high Water Stress, reported, causes a low value for the Water Resources Index.

Table 2. Final values calculated and score, Morocco, National Scale

No.	Index descriptor	Value calculated	2016 AWDO Scoring		
			L1*	L2*	L3*
1.1.1	Coefficient variation of rainfall -years	0.23	1		
1.1.2	Coefficient variation of rainfall -months	0.89	1		
1.1.3	Storage Ratio	0.80	5		
1.1	Reliability			2.33	
1.2	Water Stress	0.47		2	
1.3	Storage Drought duration length index	6.71		5	
1.4	Data availability	counting		4	
1	Broad Economy Index				3.33
2.1	Water productivity in Agriculture	1,760		5	
2.2	Self-sufficiency in Agriculture	1.32		3	
2	Agriculture Index				4
3.1	Water productivity in Energy	370.4		1	
3.2	Minimum platform for electricity production	>30%		1	
3	Energy Index				1
4	Industry Index	135,371			5
	Economic Water Security (max 20)				13.33

*L1, L2 and L3 refer to the score of the three sub-indicators levels established by the AWDO methodology. Thus, L2 results from the average aggregation of L1, if any. The same for L3 and the final AWDO score.

Comparing the scores for the Economic Water Index, the score for the sub indicator reliability is lowered by the consideration of rainfall variability. It is partly compensated by the high average score for evaluating the storage capacity at national level. The Water Stress expressed by the Water Exploitation Index is high at national level. The results are compensated by a high score for the Storage Drought Duration Length index and the positively recognized data availability. The Agricultural Index as related to the water productivity is very high and does not reflect sufficiently the existing situation. Here the high revenues from irrigated agriculture and a related high water productivity do not reflect sufficiently the rather un-sustainable water management with alerting droppings of the ground water tables at the irrigation areas in Morocco.

The very low score of the Energy Index underlines however the problem of evaporation losses in hydropower production. The points also to the need to find a trade off in providing storage capacity for counterbalancing temporary water deficits with the impossibility to use the water that have been lost by evaporation for agricultural production instead.

A particular result for Morocco is the high score for the Industrial Index, as a consequence from a relative high industrial share in the national GDP and a relative lower consumption of water resources. On the one hand, it may provide a misleading picture, suggesting a less prominent water in-security. On the other hand, it shows that the welfare could be developed at the costs of a much lower water footprint. Clearly, these first results on national level are affected by influences resulting from collecting and aggregating the economic information on sectors, scales and temporal developments. Nevertheless, they already underpin the value of an economic reflection on Water Security.

3.2.3 Sub-Conclusion Morocco

The inter-annual variability of rainfall in Morocco is only of significance in the southern part of the Atlas, whereas near Agadir the rainfall is anyway very low (290 mm) and closer to the Atlas foothills even lower (Taroudant, 230 mm). When looking to the agricultural production areas, a higher intra-annual variability of rainfall is in particular prevalent in the region of Tangier and for the rest restricted to the coastal areas around Casablanca. Together, this depict a pattern as expected and especially the region around Agadir, agriculture requires irrigation anyway. Considering the availability of storage capacity, Morocco possess some buffer capacity, which is to some extend fairly distributed in the country. However, the water exploitation index underline distinct problem regions that are less influenced by a spatial variability of available resources, but clearly associated to the massive water consumption in the major irrigation areas of Morocco.

Overlaying these results with the findings from the calculation of the Storage Drought Duration Length Index, it is apparent that the combined risk out of drought duration and storage capacity is much higher in the Agadir region and the related scoring is far lower than the national average. Clear hotspots with a high vulnerability against droughts are also at the coastal zone near Zemamra and Casablanca.

Comparing the Water Exploitation Index for the catchments of Morocco with the situation in Tunisia and Egypt, the Water Stress in Morocco appears higher and distributed more uniformly over a larger spatial area than in Tunisia and the particular situation in Egypt. At the same time, the Water Stress appears highest in the regions where both largest abstractions takes place and where already larger dam capacities are available.

However, the analysis at subnational scale indicates the appearance of hot spots in the Agadir region and the coastal zones around Casablanca, which would clearly favour the intensification of wastewater reuse.

When looking to the aggregated results at national scale, the pattern described above is to some extend reflected in the Economic Water Security index. However it must be recognized that here the averaging of the rainfall variabilities overvalues the influence of the more arid and mountainous areas in the south-eastern part of Morocco. Additionally, the high score of the Agricultural Water productivity is numerically

influencing the result in a less realistic, positive way, as it is not necessarily reflecting the influence of the dramatic over abstraction of groundwater resources in Morocco. The aggregating of information at national scale is of limited use for the quantification of Water Stress.

The calculation of the Economic Water Security index at national scale is however valuable to extend the scope from a classical hydrological assessment towards a wider consideration of socio-economic elements (Figure 12). Especially the mutual reflection of results from the different scales and using the scores in relation to the 2016 AWDO framework can help to understand priority areas for policy development and interventions better.

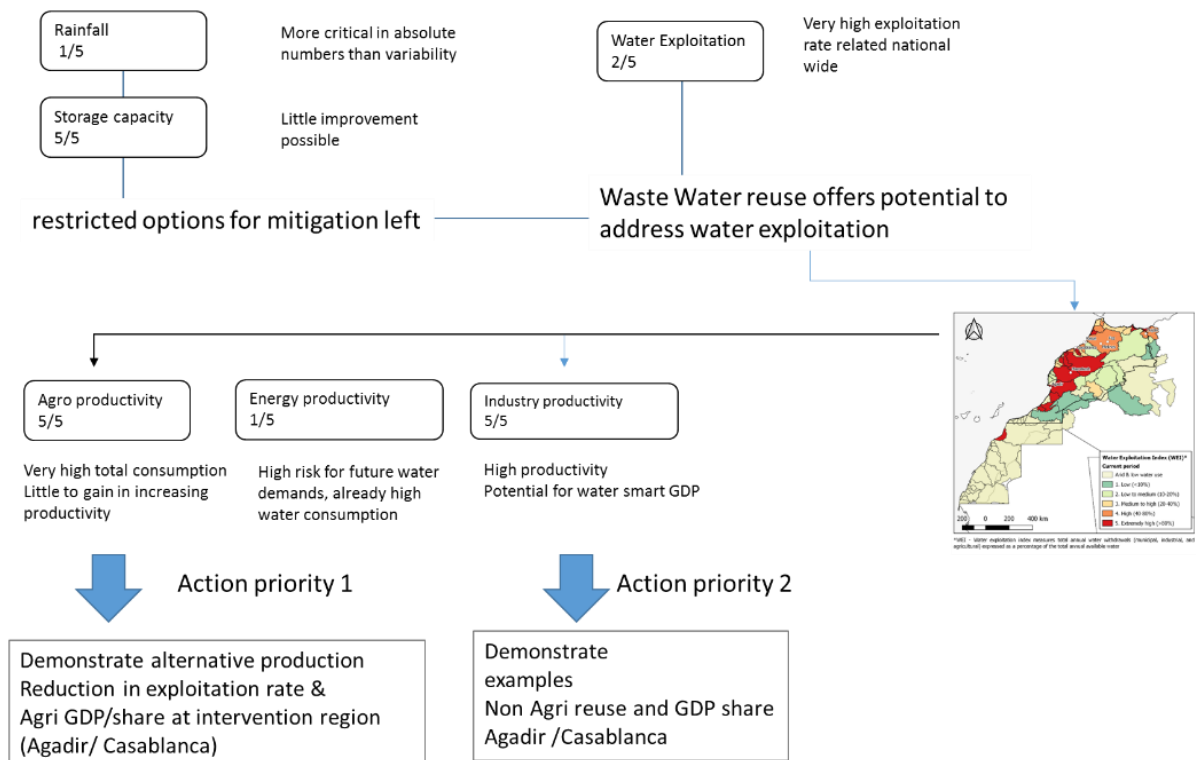


Figure 13: Integration results from assessing Water Stress at subnational scale and Water Security at national scale Morocco

The evaluation of outcomes from the economic Water Security assessment indicates that there is little room for improving the Water Stress on the side of water availability. The low score on rainfall availability triggers instead a more in depth re-checking of the results. It reveals that while the absolute rainfall is already low, the variability is mainly relevant in the mountainous areas where already large dam capacities are installed. The already given rather large dam capacity indicates that a new building of dams will not likely improve the situation and it should not be a first priority at a national perspective.

Mitigation options should instead clearly focus on the demand side. Here, the in-depth analyses at the scale of river basins helped to realize the vast and uniformly distributed exploitation of water resources. In this view, installations for the re-use of wastewater are hence unlikely to solve the problem at wider national scale. Instead, concentrating on a priority region should be recommended. For that, the regional findings on the Storage Drought Duration Length Index are helpful to point to the Agadir and Casablanca region.

Looking to the economic sectors at national level, underlines that the high Agricultural Water Productivity leaves little room for further optimization. Here the introduction of wastewater reuse schemes can lower

the consumption of freshwater resources. A prerequisite remains however that the production will not just be extended, but that alternative production schemes can be developed instead. Understanding the vast spatial spread of high water exploitation, it is recommended to concentrate also the impact evaluation for selected regions. Predicting and monitoring the effect of wastewater reuse on alternatively created value share in GDP as well as to demonstrate the effective reduction on the water exploitation rate will finally enable a back linking of results to the originally elaborated assessments.

The low Energy index highlights that for Morocco there is a strong increase in electricity production to be expected. A related increase in water consumption must be avoided. Here the new building or extension of hydropower dams is not a recommendable option and photovoltaic production or the use of wind-energy has to be favoured from the water perspective. Wastewater reuse interventions might be of little effect in a first glance, but the international tendency to recover energy from the wastewater treatment process can be an interesting aspect to minimise at least a further related increase in energy demand.

The Industrial Water Productivity appears already reasonably high at national scale. This is rather interesting and underlines that there is a principle high share of GDP with reasonable water consumption possible. Future interventions within Morocco to mitigate the Water Stress should hence favour measures that can boost the development towards a more "water smart GDP". In this view, wastewater reuse schemes, utilizing the effluent from controlled industrial processes especially from food & beverage processing, offers further opportunities to lower the water food print accordingly. Additional, detailed studies to map the role of industrial production as well as to relate the outcomes to a more defined differentiation industrial GDP and related water productivity can help to give a more complete picture after the implementation of Waste water reuse interventions.

3.3 Characterising Water Stress and Water Security in Tunisia

With a TRWR of around 4.6 km³/year (68% surface water, 32% groundwater), the total water withdrawal of Tunisia is estimated in around 3.3 km³/year, most of it dedicated to agriculture (80%), following by the urban (14%), industrial (5%) and tourism (1%) (FAO, 2016).

For the population an average of around 307 m³/year is available to satisfy their freshwater requirements. This figure is far below from the worldwide average, estimated in 6000 m³/year, but similar to the neighbour countries, estimated in 287 m³/year for Algeria and 112 m³/year for Libya (FAO, 2016).

3.3.1 Mapping Water Stress at Sub-national level

The national figures clearly indicate that Tunisia is a highly water scarce country, where more than 75% of the TRWR are used by the economy. However, as in the case of Morocco, the water distribution is not constant across the territory and along the year. An in-deep analysis at sub-national level provides a better overview of the water stress related situation in the country. To do that, a set of maps for the relevant AWDO indicators are provided below. The information is depicted for all river basins in Tunisia.

3.3.1.1 Temporal reliability of water resources

The values for the inter-annual rainfall vary between 0.145 and 0.262 (Figure 14). As in the case of Tunisia, higher inter-annual variability of precipitation is located in the lowlands watersheds close to the East coast. The more humid basins located in the mountainous areas of the North-West present a lower variability. A lower inter-annual variability is also found in the south of the country, characterised by an arid climate, and therefore a very low absolute rainfall.

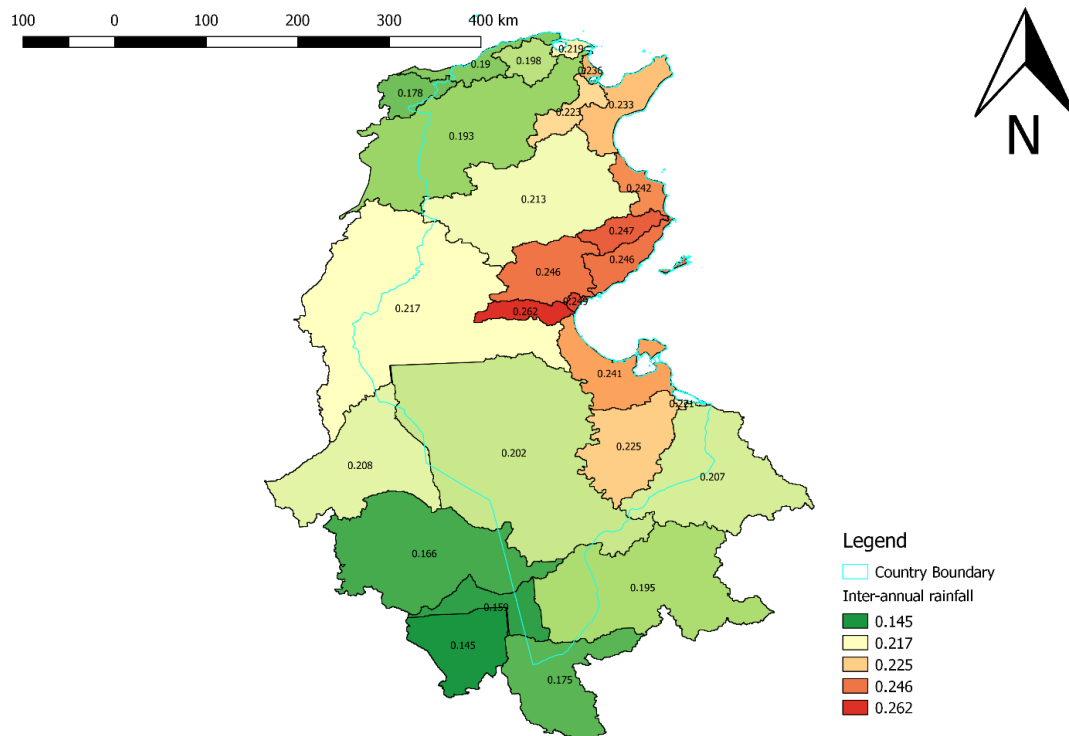


Figure 14: li inter-annual rainfall, Tunisia, current condition

The values for the intra-annual rainfall vary from 0.42 until 0.91. The intra-annual rainfall variability too differs along the country, with the highest values located in the dry basins of the south of the country (Figure 15). The central part is characterized by the lowest intra-annual variability, while a slight increase can be observed at the coastal basins of the North.

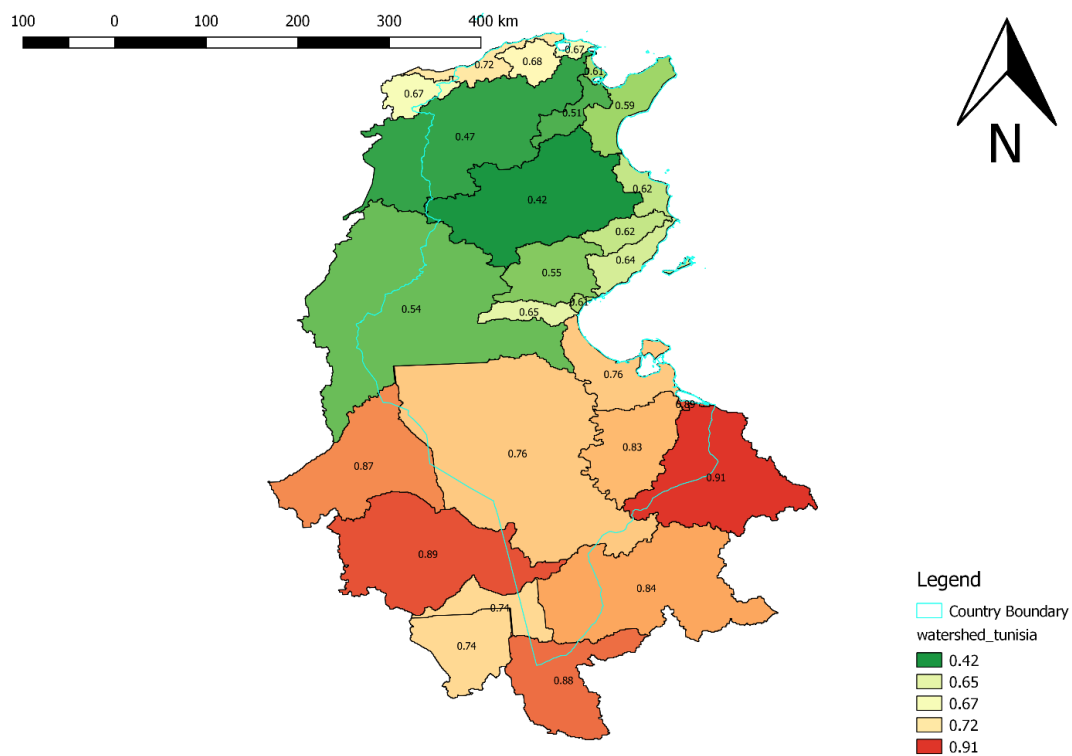


Figure 15: intra-annual rainfall , Tunisia, current condition

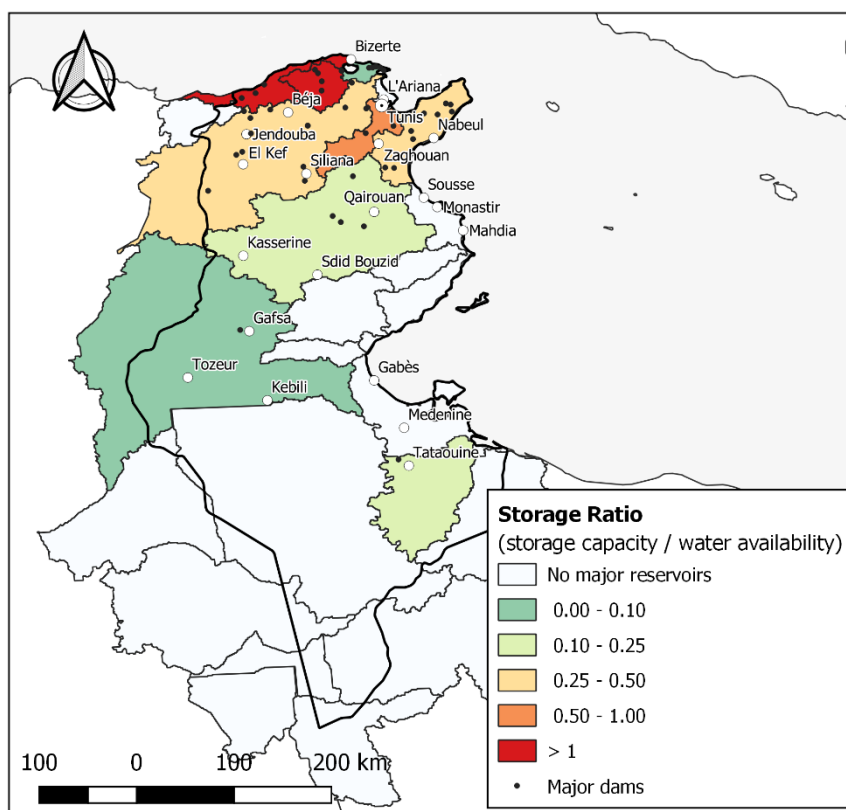


Figure 16: Storage ratio, Tunisia, current condition

With a total storage capacity of 3 km³, the storage ratio of Tunisia is sizable. Most of the dams are concentrated in the more humid North, where some small basins of the coast reach a storage ratio higher

than 1. However, even basins such as the Medjerda basin, marked by a number of large dams, do not exceed a storage ratio of 0.5.

3.3.1.2 Water Stress

The majority of TRWR of Tunisia are mainly located in the inland Northern part of the country (Dorsal). Here, several river basins indicate a TRWR higher than 2 km³/year.

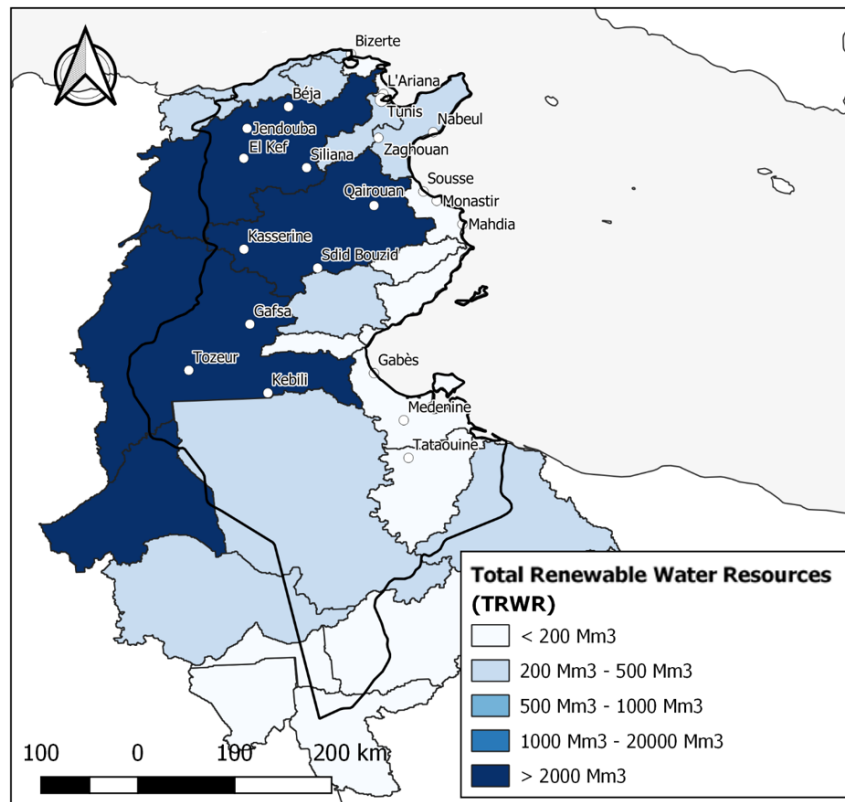


Figure 17: Total Renewable Water Resources, Tunisia, current condition

The highest Water Exploitation Index values are occurring in the more populated coastal basins, where a combination of low TRWR and high water demand due to agriculture, urban and tourism could be identified (Figure 197). Only a couple of small basins present an extremely high WEI, with a water withdrawal higher than the TRWR, indicating an overexploitation of freshwater resources.


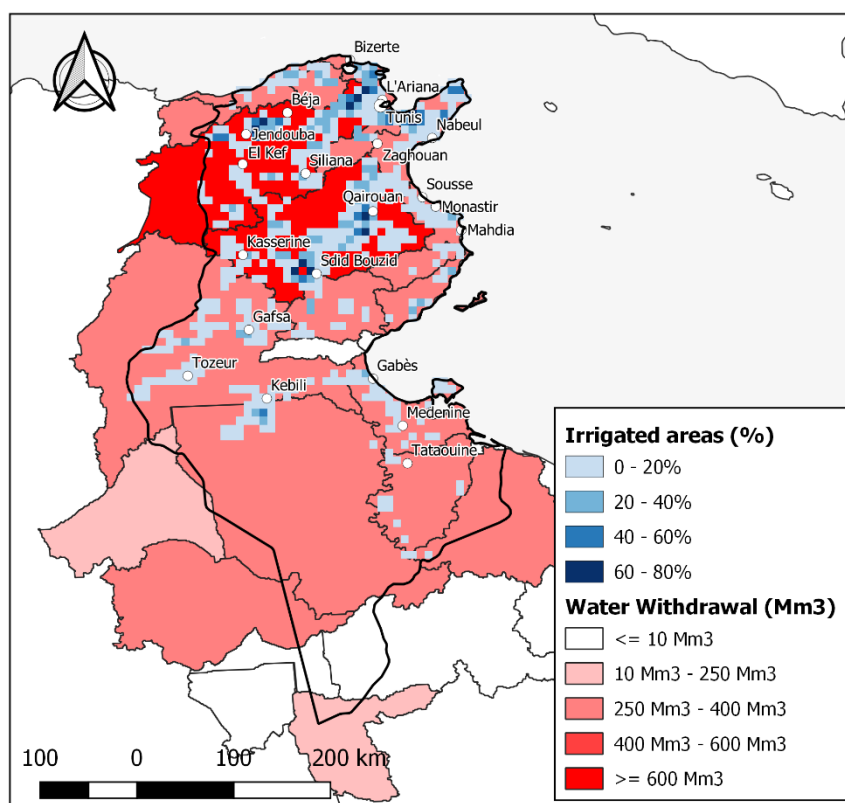


Figure 18: Tunisia, water withdrawal and location of irrigated areas, current condition

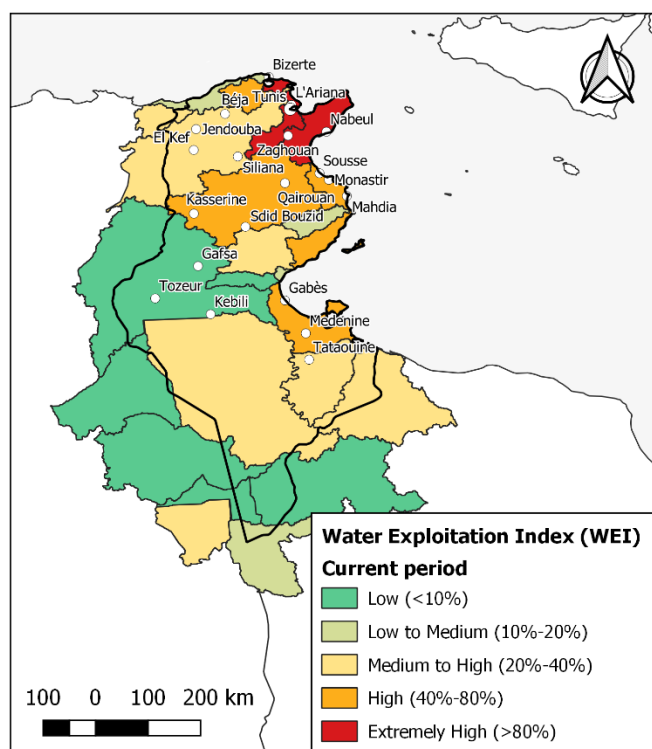

*WEI - Water exploitation index measures total annual water withdrawals (municipal, industrial, and agricultural) expressed as a percentage of the total annual available water

Figure 19: Water Exploitation Index, Tunisia, current condition

The relative lower water availability of the coastal basins in the greater Tunis area and the prevalent high water consumption results into highest Water Exploitation ratios in this region. High exploitation rates are also met at the surrounding of the Kairouan plain in the central part.

3.3.1.3 Storage Drought Duration Length Index -SDL

The largest drought duration are mainly located in the South and at the East coast of the country, with drought durations higher than 2.5 months.

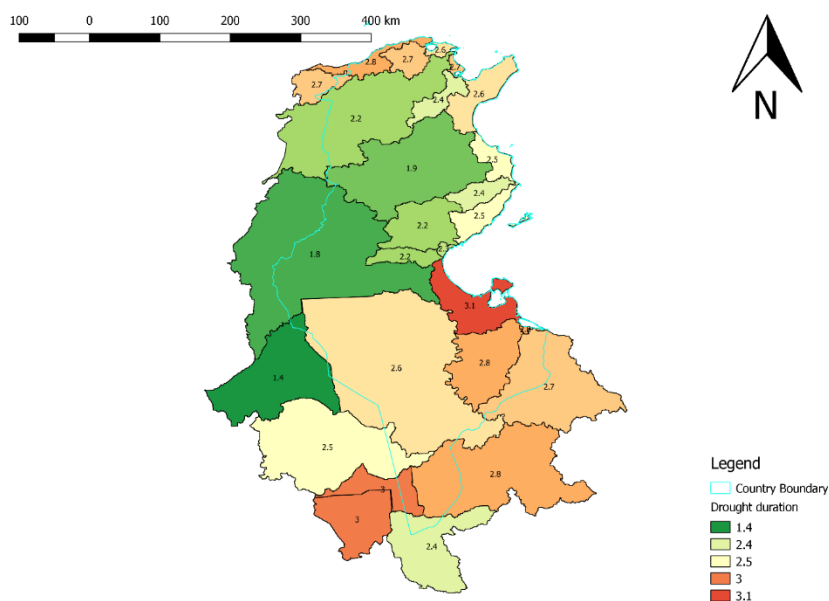


Figure 20: Drought duration, Tunisia, current condition

The basins of the North, characterised by the higher withdrawal, also contain most of the major reservoirs. The assessment of the SDL indicates that the reservoir capacity of these basins is enough to satisfy the water withdrawal for at least 6 months under exploiting the entire reservoir storage volume. However, the resilience of the country to a severe or extreme drought event is limited, especially as the high sediment loads lead to a reduction of the storage capacity and it is unlikely that the dams are maximum filled at the onset of a drought.

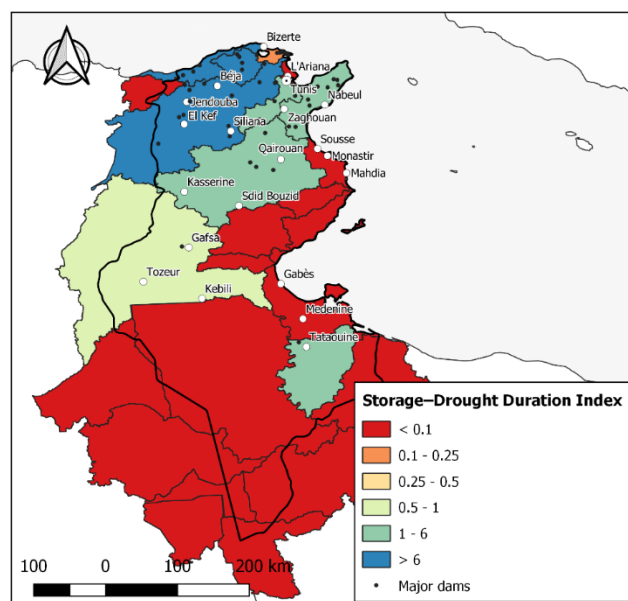


Figure 21: Storage-Drought Duration Index, Tunisia, current condition

3.3.2 Assessing Economic Water Security at national scale

As described in the assessment of Morocco, the Economic Water Security follows the AWDO approach. It provides an overview to which extent a country is able to satisfy the need of water for the economic sectors (food, industry and energy).

It could be stated that Tunisia, with an Economic Water Security Index of 15.16 (max 20), still has major challenges to satisfy the economic sector, even if the score is higher than the score of Morocco (Table 3.

Final values calculated and score, Tunisia, National Scale

No.	Index descriptor	Value calculated	2016 AWDO Scoring		
			L1*	L2*	L3*
1.1.1	Coefficient variation of rainfall -years	0.22	1		
1.1.2	Coefficient variation of rainfall -months	0.69	2		
1.1.3	Storage Ratio	0.70	5		
1.1	Reliability			2.66	
1.2	Water Stress	0.72		2	
1.3	Storage Drought duration length index	3.89		4	
1.4	Data availability	counting		4	
1	Broad Economy Index				3.16
2.1	Water productivity in Agriculture	1,783		5	
2.2	Self-sufficiency in Agriculture	1.07		3	
2	Agriculture Index				4
3.1	Water productivity in Energy	168.5		1	
3.2	Minimum platform for electricity production	Above average		5	
3	Energy Index				3
4	Industry Index	58.56			5
Economic Water Security (max 20)					15.16

).

An in-depth analysis of this figure indicates that the Water Resources Index and Energy index determine the final score. The result for the Water resources index is the comparable with the one for Morocco. The energy index varies with 2 points out of 5, making Tunisia more energy productive regarding water.

Two important observations should be highlighted. The high inter- and intra-annual rainfall variability at national scale is affecting the score negatively, even if the high Water Stress with almost 70% of the TRWR provide a more realistic picture of the reality. On the other hand, the high storage ratio and the associated high SDL surrogates a resilience of the country resulting in a higher score in the Water Security.

Table 3. Final values calculated and score, Tunisia, National Scale

No.	Index descriptor	Value calculated	2016 AWDO Scoring		
			L1*	L2*	L3*
1.1.1	Coefficient variation of rainfall -years	0.22	1		
1.1.2	Coefficient variation of rainfall -months	0.69	2		
1.1.3	Storage Ratio	0.70	5		
1.1	Reliability			2.66	
1.2	Water Stress	0.72		2	

1.3	Storage Drought duration length index	3.89	4
1.4	Data availability	counting	4
1	Broad Economy Index		3.16
2.1	Water productivity in Agriculture	1,783	5
2.2	Self-sufficiency in Agriculture	1.07	3
2	Agriculture Index		4
3.1	Water productivity in Energy	168.5	1
3.2	Minimum platform for electricity production	Above average	5
3	Energy Index		3
4	Industry Index	58.56	5
Economic Water Security (max 20)			15.16

*L1, L2 and L3 refer to the score of the three sub-indicators levels established by the AWDO methodology. Thus, L2 results from the average aggregation of L1, if any. The same for L3 and the final AWDO score.

3.3.3 Sub-Conclusion Tunisia

The inter-annual variability is highest in the coastal areas. When looking at the total storage capacity of 3 km³, the storage ratio of Tunisia is rather developed. The actual total storage is even higher when the small dams (barrages colineares) and the artificial ground water recharge are considered as well. Most of the dams are concentrated in the more humid North, where some small basins of the coast reach a storage ratio higher than 1. The northern basins have to some extend a capacity to sustain shorter drought periods in the order of months.

However, as the reservoirs are already used for the intra-annual compensation of river discharges, the actual buffer capacity is much lower and should be subject to more in depth investigations, where required. In this view, only restricted options are left to develop the existing scarce water resources further and mitigation options need to be concentrated in the demand side.

The national figures clearly indicate that Tunisia is a high water scarcity country, where more than 75% of the TRWR are used by the economy. Highest scarcity is concentrated at the coastal areas, where also the big cities of Tunisia are located.

The general water exploitation in Tunisia is already high, even at national level. Investigating the spatial distribution within the country, it is apparent that most of the water withdrawal is located in the basins with the higher TRWR, and much related with irrigated agriculture (Figure 18). In particular, the coastal basins in the surrounding from Tunis suffer also a higher water withdrawal due to the urban and touristic water consumption. A high water exploitation rate is also given at the Kairouan plain. Here the actual situation is even more aggravated as the AWDO indicators does not consider the state of the aquifer overexploitation in detail.

Overall, the drought resilience of the country is limited and can be underlined by the effort of the Government of Tunisia to advance the aquifer recharge, leading also to less evaporation losses than when storing the water in dams.

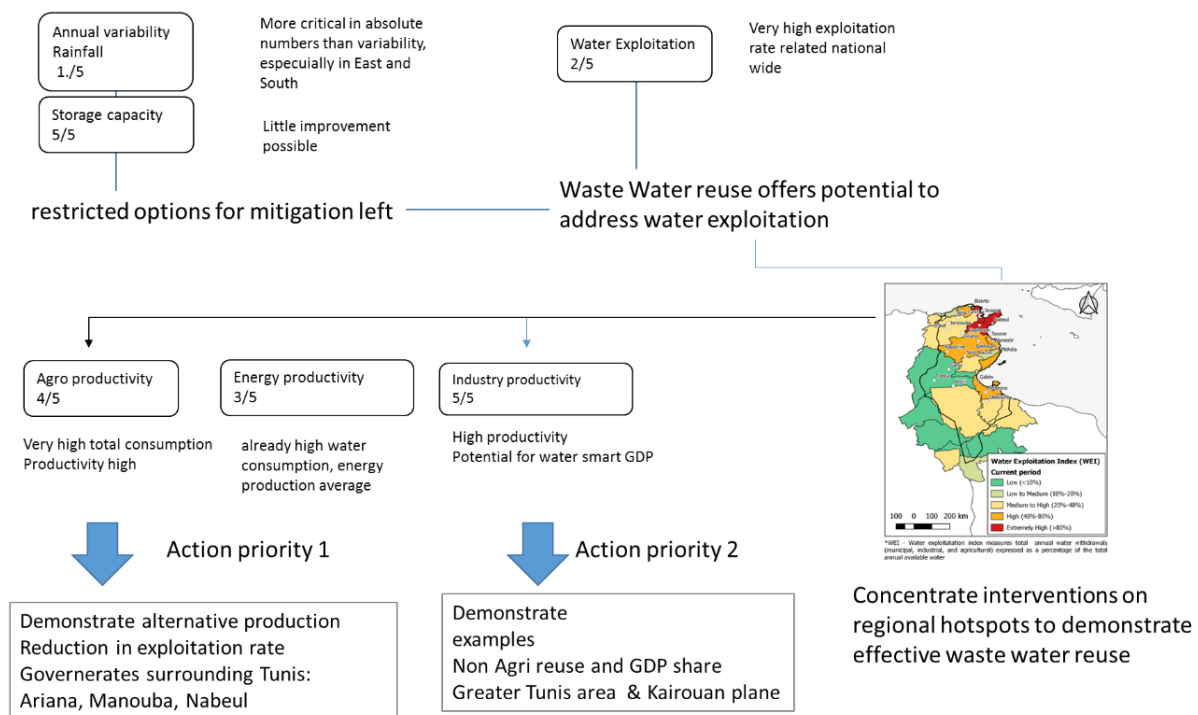


Figure 22 : Integration results from assessing Water Stress at subnational scale and Water Security at national scale Tunisia

In a national perspective (Figure 22), the water productivity in agriculture is already reasonable high. An actual mitigation of Water Stress is hence only possible if the production increase at selected areas can be realized from the use of water that had been previously a net loss. At the same time it would be required to decrease the total production area accordingly, which is rather unlikely.

Substituting the use of freshwater resources by the use of reclaimed wastewater within the agricultural production can be a principle option. Considering the proximity of wastewater sources and agricultural production areas in the wider surrounding of Tunis, it can be recommended to concentrate the efforts on this region in order to demonstrate positive net effects on water security beyond the local scale.

The energy production in Tunisia also appears to be already rather developed. However, the energy demand with the increasing digitalization will increase. The water productivity in the energy production is very low. Future ways to increase the energy production should hence consider less water intensive ways of production first.

According to the AWDO assessment framework, there is some indication that the water productivity for industry in Tunisia is on the rather high side. Future in depth studies should reveal the potential to increase the GDP even without further consumption of freshwater resources. In this view, an increase of wastewater reuse within the non-agricultural industrial production or coupling the existing production to a subsequent reuse in agriculture could lead to relevant synergetic effects in decreasing water scarcity and increasing Water Security.

3.4 Water stress and Water Security in Egypt

3.4.1 Mapping Water Stress at Subnational level

Most of the water resources from Egypt are coming from the Nile River, the longest river in the world. The TRWR of Egypt is estimated in around 58.3 km³/year. As a result of the Nile Waters Agreement of 1959 between Egypt and Sudan, 55,5 km³ flows yearly into Egypt. The water, regulated by the Aswan reservoir is subsequently distributed to the different irrigation districts. From the TRWR, only 1.8 km³/year is considered as internal renewable resources, most of them coming from groundwater recharge (1.3 km³/year) and only 0.5 km³/year is considered surface water from runoff. The total water withdrawal of Egypt is estimated in around 78 km³/year, most of them dedicated to agriculture (86%), following by the urban (11.5%) and industrial (2.5%) uses (FAO, 2016). That means the population average around 699 m³/year to satisfy their freshwater requirements.

Water withdrawal of Egypt is higher than the TRWR, thanks to the water percolated from irrigation in the Valley and the Delta. Fossil groundwater from the aquifer located under the Western Desert is also considered an important source of water.

In Egypt, most of the water withdrawal is located in the irrigation areas of the Valley and the Delta, with only some spots of water consumption in the new irrigation developments of the desert (groundwater). Therefore, water withdrawal is mapped at irrigation unit level and not at watershed level as for Morocco or Tunisia, in order to provide a better understanding of the water use. Some indicators such as the TRWR, Water Stress or storage ratio are not mapped at subnational level in case of Egypt. This is because around 96% of the TRWR of the country is coming from the same source (Nile River). Therefore, it is not useful to calculate those indicators at subnational level, since the same value should apply to almost the whole country.

3.4.1.1 Temporal reliability of water resources

As can be seen in Figure 22, the values for the inter-annual rainfall variability vary from 0.014 until 0.33. The higher values are located around the Nile delta along the Mediterranean coast. In these regions, the production of agricultural is nevertheless fully irrigated and hence less dependent from the rainfall variability.

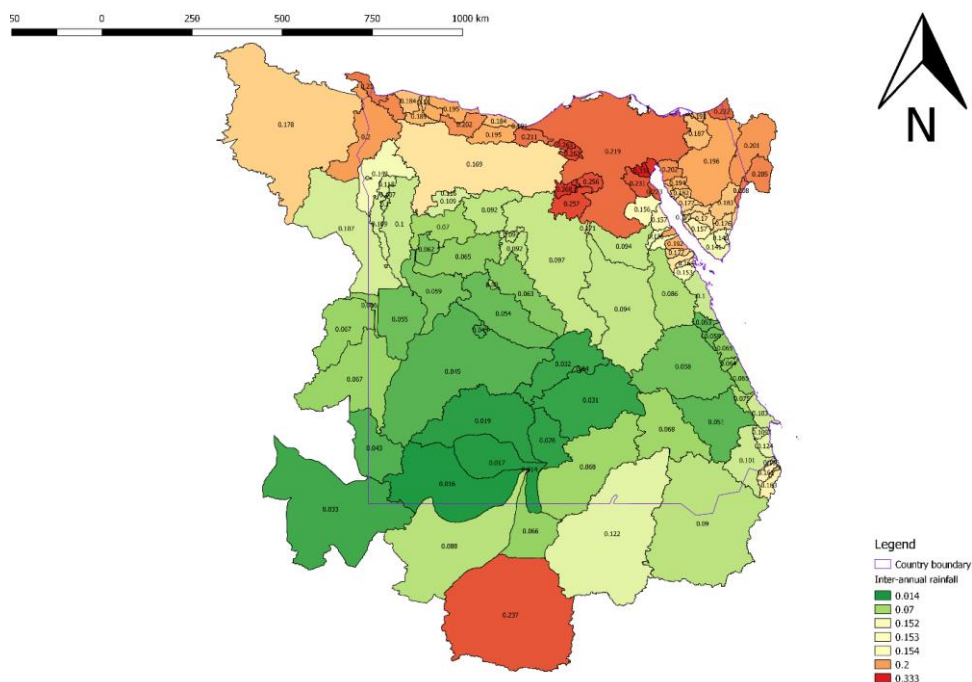


Figure 23: Inter-annual rainfall, Egypt, current condition

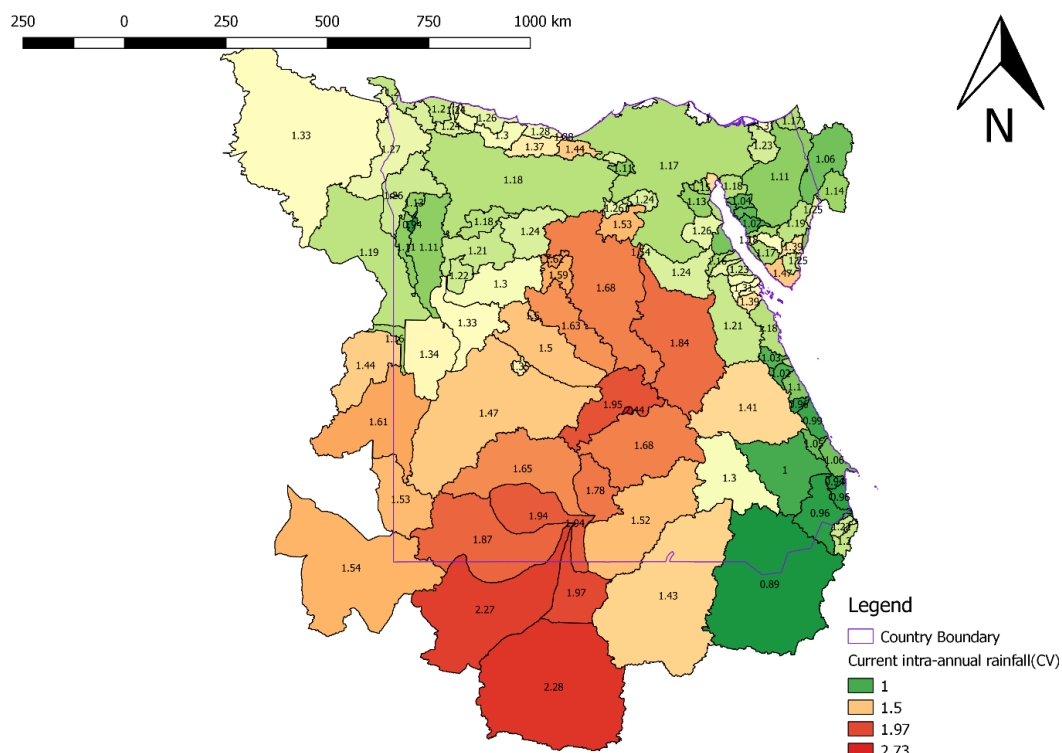


Figure 24: Intra-annual rainfall , Egypt, current condition

The coefficient of variation for the intra-annual rainfall variability is in a range between 1 and 2.73 with the higher values located in the South and South-West. Again, as both inter- and intra-annual rainfall variability should have a slight impact in the Water Security of Egypt, since only a little portion of the TRWR is coming from precipitation.

3.4.1.2 Subindicator: Water Stress


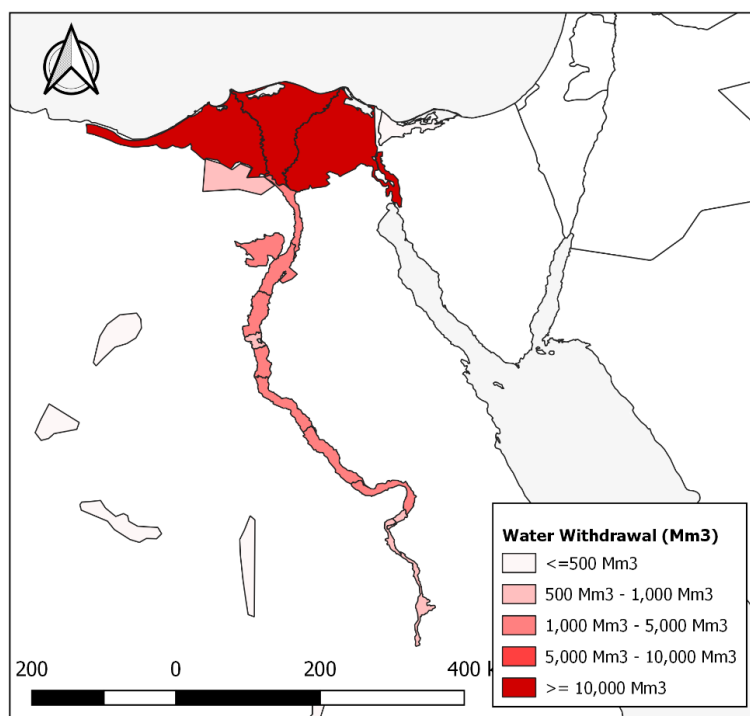


Figure 25: Water Withdrawal and location of irrigated areas, Egypt, current condition

3.4.1.3 Subindicator: SDL



The range of SDL values is between 1 and 3.5. The highest values are located in the North, concentrated around the irrigation areas of the Delta. The lowest values can be found in the South.

3.4.2 Assessing Economic Water Security at national scale

For Egypt, an overall Economic Water Security Index of 13.0 (max 20) have been calculated, which depicts the serious challenge of the country to provide a water security to satisfy the economic sectors. Within this study, it is the lowest score in comparison to Morocco or Tunisia. The major difference to both Morocco and Tunisia, is the Agriculture index, with a value of 1.5 over 5. This is because of the low value of the water productivity in agriculture and the high dependency of external agricultural products with a large water footprint. The rest of the indicator scores are comparable.

Table 4. Final values calculated and score, Egypt, National Scale

No.	Index descriptor	Value calculated	2016 AWDO Scoring		
			L1*	L2*	L3*
1.1.1	Coefficient variation of rainfall -years	0.14	2		
1.1.2	Coefficient variation of rainfall -months	1.31	5		
1.1.3	Storage Ratio	2.855	5		
1.1	Reliability			4	
1.2	Water Stress	1.33		1	
1.3	Storage Drought duration length index	8.6		5	
1.4	Data availability	Counting		4	
1	Broad Economy Index				3.5
2.1	Water productivity in Agriculture	3846		1	
2.2	Self-sufficiency in Agriculture	1.6		2	
2	Agriculture Index				1.5
3.1	Water productivity in Energy	367.5		1	
3.2	Minimum platform for electricity production	Above average		5	
3	Energy Index				3
4	Industry Index	381.1			5
Economic Water Security (max 20)					13.0

*L1, L2 and L3 refer to the score of the three sub-indicators levels established by the AWDO methodology. Thus, L2 results from the average aggregation of L1, if any. The same for L3 and the final AWDO score.

3.4.3 Sub-Conclusion Egypt

The inter annual rainfall has the highest variability in the Northeast of the country. Looking at the climate, it consists of mostly arid climate with highest rainfall in the North and alongside the coast. However, the rainfall is negligible. amounts remain little. When looking at the intra annual rainfall variability one sees a more matching pattern with the other countries.

As mentioned in the beginning of this subsection most of the water withdrawal is located in the irrigation areas of the Valley and the Delta, with only some spots of water consumption in the new irrigation developments of the desert (groundwater). Therefore, water withdrawal is mapped at irrigation unit level and not at watershed level as for Morocco or Tunisia.

Moreover, in the case of Egypt, some indicators such as the TRWR, Water Stress or storage ratio could not have been mapped meaningfully at subnational level. There is no variation to be displayed as basically around 96% of the TRWR of the country is coming from the same source (Nile River).

The storage capacity ratio is high, which can be nearly entirely provided by the Aswan dam. To some extent the dam is able to buffer some variability of the Nile river flows upstream and to provide a regulated water availability to the agricultural areas downstream.

The Water Stress and the Water Exploitation ratio in the Egypt is extreme high.

From the perspective of the total score, Egypt is the country with the lowest value for the Economic Water Security, indicating a higher vulnerability. The results are mainly caused by a low Agricultural Index with a low agricultural productivity and a low self-sufficiency in the Agriculture sector.

With the complete dependency of agriculture on the discharge in the Nile and the irrigation canals, as well as on pumping from the aquifers, the water challenge in Egypt is hence a structural one and regional variations are more a result of the prevailing water resources management and agricultural production area increase.

The choice in which regions future interventions of waste water reuse should be given some priority is hence less a matter of hydrological conditions, but a matter of identifying regions with suitable access to waste water, possible treatment, monitoring, and control technologies. It is unlikely that the restricted availability of wastewater from point sources can help to improve the low agricultural water productivity at national scale. Demonstrating the positive impact should be realized at the scale of some sub regions, showing improvement of the situation.

On the other hand, the situation in Egypt is influenced by the discharge of wastewater (treated and untreated) into the drainage canals and its reuse in irrigated agriculture downstream. From this view, interventions could have a more wide spread reach. However, it requires a more holistic approach and a sufficient improvement of the drainage water quality. The applicability of solutions depends a lot from the question, whether an effective monitoring both in the drains as well as at the end-of the discharge pipes can be realized.

Egypt has ample of flat space in the deserts available. Concentrating the reuse schemes to the creation of agribusiness parks may help to design the composition of the wastewater according to the needs and to realize the required efficiency in monitoring and control.

3.5 General conclusion current state

The current situation is reflected by a relative low Economic Water Security for Morocco, Tunisia and Egypt. From the total score, Egypt is the country with the lowest value, indicating a higher vulnerability, mainly related with the Agricultural Index, both for the low agricultural productivity and the low self-sufficiency in the Agriculture sector. Morocco has a similar score, but here the Energy Index determines the final score, since energy production per capita is far below the regional average production for the MENA countries.

Numerically it seemingly appears that as a result of the storage capacity within the region, the risk of water shortage related with rainfall variability and droughts is partially limited in the three countries. However, the large inter and intra-annual rainfall variability, in couple with a high water exploitation could hamper the Water Security of the countries. This is especially true for Egypt, where the storage capacity is even higher than the yearly TRWR, but the water withdrawal is also higher than the TRWR.

Some hotspots where the Water Security is at risk, could have been identified for all countries. Usually they are situated close to the coastal areas, with less water resources available and a high density of population with an increasing water demand.

The current assessment indicates a potential vulnerability for the near future, where the expected reduction of the water availability, would jeopardize the satisfaction of the future water necessities.

4 Water Stress outlook 2050

4.1.1 Approach for estimating the water stress outlook for 2050.

Planning interventions in waste water reuse are not only demanding an in-depth understanding of the current Water Stress situation, but benefit also from outlining the future developments. In this context it is of particular interest how the predicted climate change may affect the rainfall variability and the drought durations. Future available TRWR and the possible change of water consumptions as a result of the socio-economic development are difficult to predict. Given their relevance in determining future Water Stress, at least an indicative estimation should be made.

For providing the Water Stress outlook 2050, the same indicators as for the Water Stress characterisation at the level of river basins have been used. As presented in Figure 27, climate related information were considered on the base of model results and together with the estimations of future water consumption, the same indicators had been calculated as for depicting the current water stress.

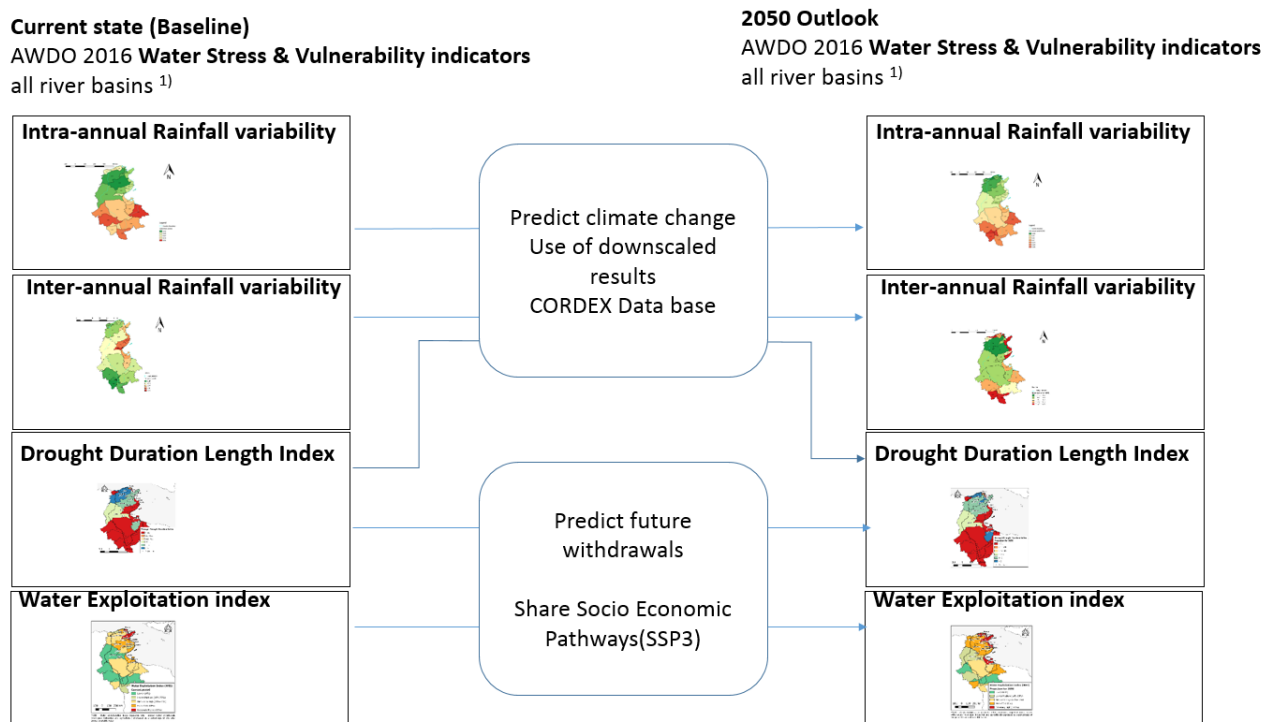


Figure 27: Climate change forecasting and estimations for the future water consumption towards a 2050 Water Stress outlook

The projection of inter-annual rainfall variability, intra-annual rainfall variability, and drought duration at 0.05 degree have been elaborated by using monthly data from downscaled CORDEX data base (Jones et al., 2011) and the consideration of the with Representative Concentration Pathway 8.5 for the period 2041-2070 (hereinafter referred to as 2050). The CORDEX database is maintained by the European Commission, WRC and the IPCC (Giorgi et al., 2009). Within the CORDEX data set, monthly and yearly ensemble means (with CDO assuming that a month has 30 days) from 19 model combinations are provided. The RCP 8.5 is used as it represents the more extreme scenario.

A proxy is used to estimate water withdrawal for the 2050 period. For this the current urban and industrial water consumption per capita at country level had been related to the predicted population as projected for 2050 at basin level.

To estimate the proxy for the TRWR in 2050, the current relation between rainfall and water availability have been estimated first. This relation is then offset with the projected rainfall data.

Information for growth population is extracted from the spatially explicit global population database developed by (Jones and O'Neill, 2016). Here, predictions on the population growth for the five Shared Socio-economic Pathways are basically available (SSP1 to SSP5). For the further calculation the most extreme scenario in terms of population growth, SSP3, have been considered.

As justified in section 3 there are less maps reconstructed for Egypt as for the other countries. As for the current situation, Water Stress for 2050 of Egypt is not mapped at subnational level, since the value of TRWR is reported only at national level.

In contrary to the calculation for Morocco and Tunisia, not all indicators could have been calculated at subnational scale for Egypt. Water Stress for 2050 of Egypt is only indicated at national level, since the TRWR were also only calculated at national level.

4.2 Water stress outlook 2050 Morocco

4.2.1 Temporal reliability of water resources outlook 2050

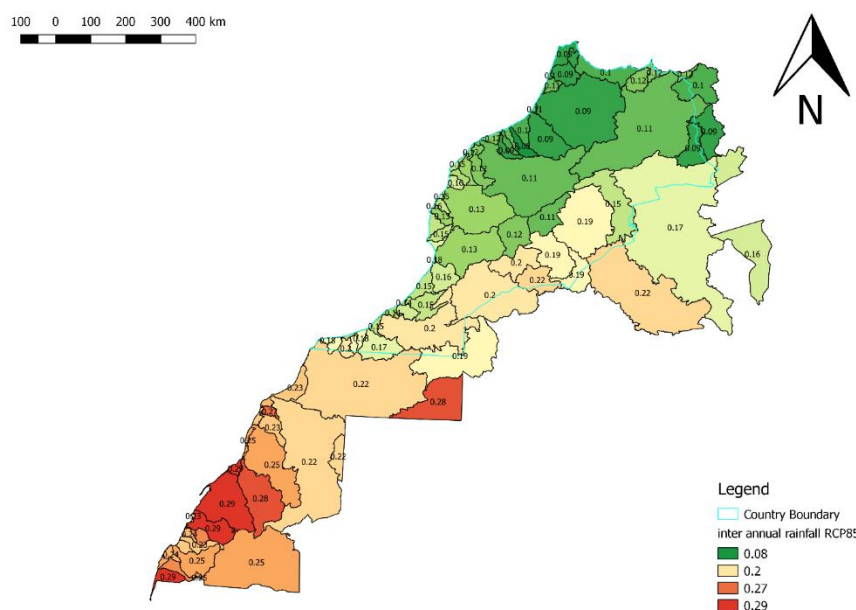


Figure 28: Morocco 2050 inter-annual rainfall (RCP 8.5)

Within the outlook for 2050, an increase of the inter-annual rainfall variability is especially predicted for the Sahara region. Here the highest rainfall variability is to be expected. Another increase is expected at the basins at the southern side of the Atlas mountains.

In contrary, for the northern basins at the Atlantic coast a decrease of inter-annual rainfall variability, corresponding to a decrease of the coefficient of variation from 0.3 to 0.08 have been predicted.

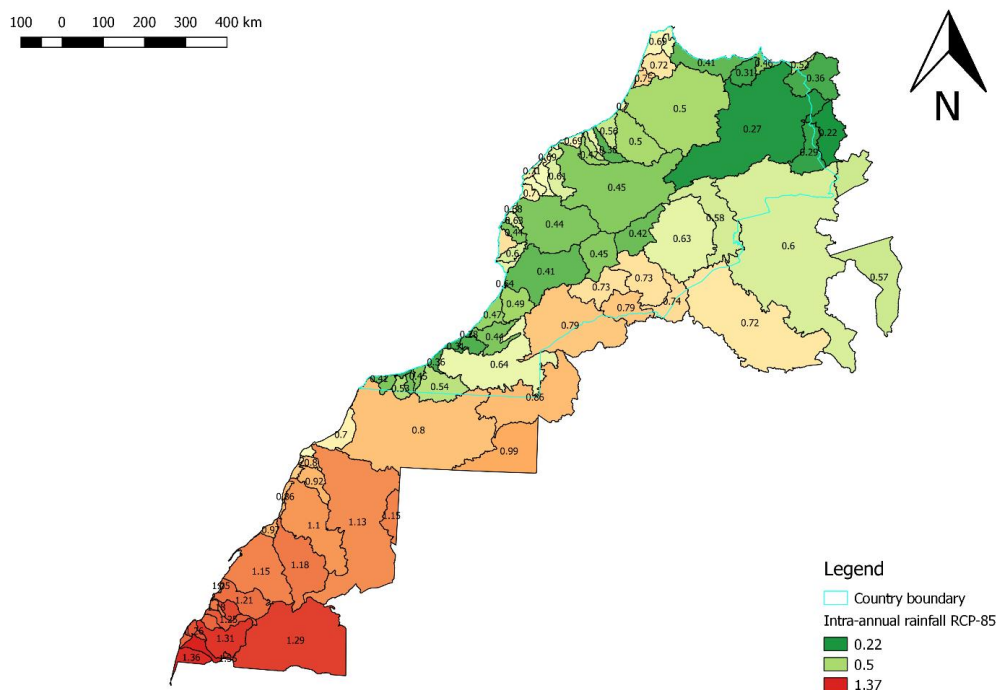


Figure 29: Intra-annual rainfall (RCP 8.5), Morocco, Outlook 2050

The 2050 outlook does not indicate relevant change in the intra-annual rainfall variability. The same pattern as for the current situation appears, with highest variability (with a coefficient of variation of up to 1.3) in the arid southern part and a relative lower variability (with a coefficient of variation of 0.5) in the northern part.

In this view, it is to be expected that the climate change will not affect the existing rainfall variability between the months of a year. The predicted increasing uncertainty on the annual rainfall is mainly restricted to the areas with already negligible rainfall.

4.2.2 Water Stress Outlook


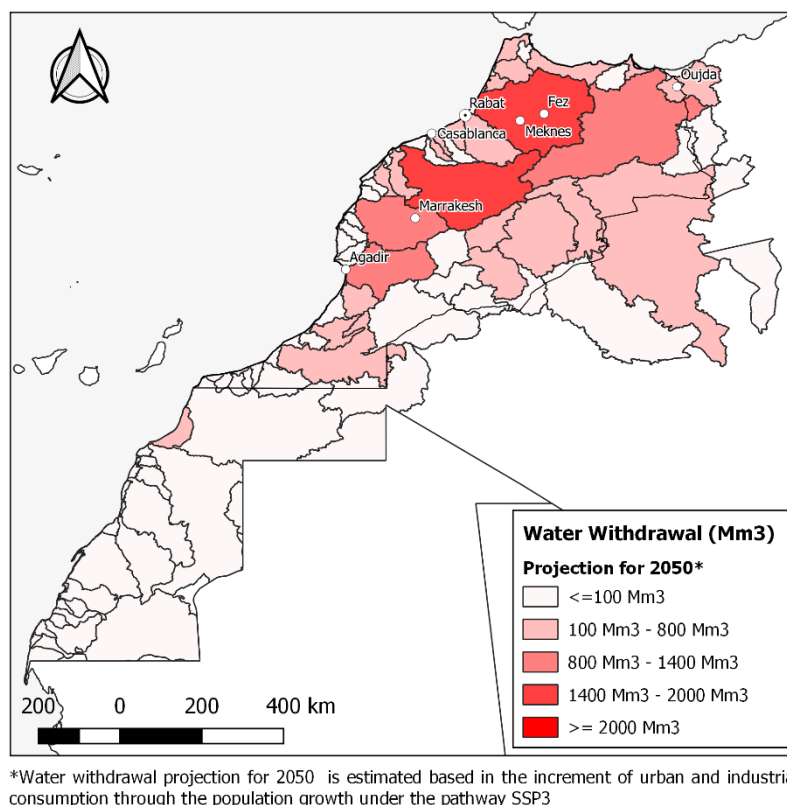


Figure 30: Water Withdrawal (SSP3), Morocco, Outlook 2050

The estimated predictions for the water withdrawal are displayed in Figure 29. The highest withdrawals are located in the North. The lowest values can be found in the South. While the estimation assumes that the increase of irrigation areas is related to the population growth, there are no significant changes in the water withdrawal calculated in comparison to the current status.

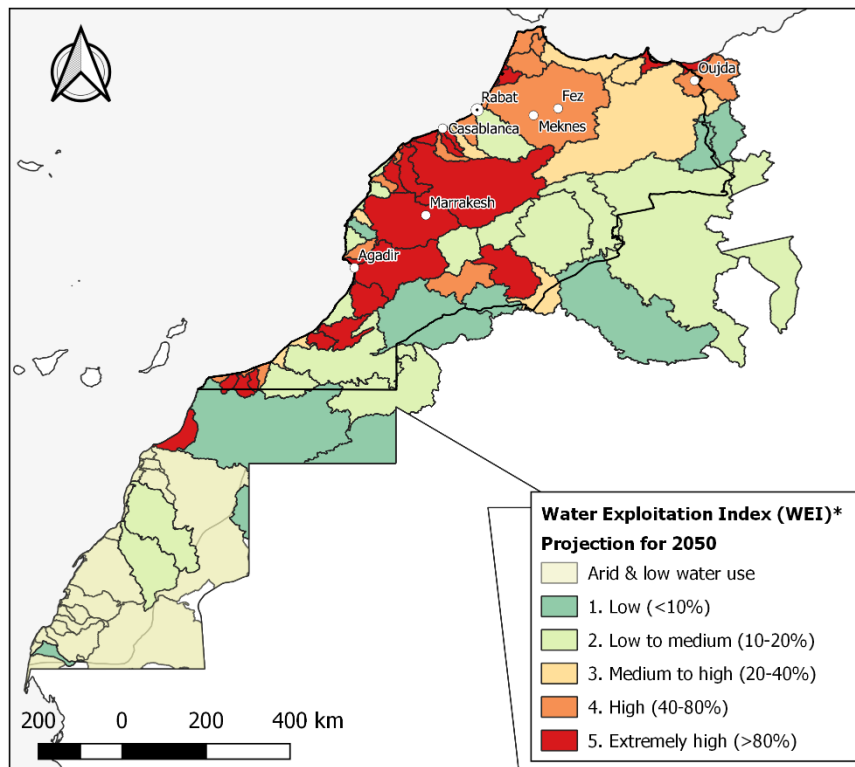

*WEI - Water exploitation index for 2050, measures projected annual water withdrawals (municipal, industrial, and agricultural) expressed as a percentage of the projected annual available water

Figure 31: Water Exploitation Index (RCP8.5/SSP3), Morocco, Outlook 2050

The outlook for the Water Exploitation Index in 2050 (Figure 30) predicts for the northern and central agricultural areas with a high water consumption even under the current conditions, virtually no changes. Given the method chosen for predicting the increase in water demands, the little significance of changes might be subject to the method.

On the other hand, the results point already to some decrease in water consumption for the rural areas south of Agadir and an increase of consumption in the mountainous region east of Agadir.

4.2.3 Storage Drought Duration Length Index – SDL outlook

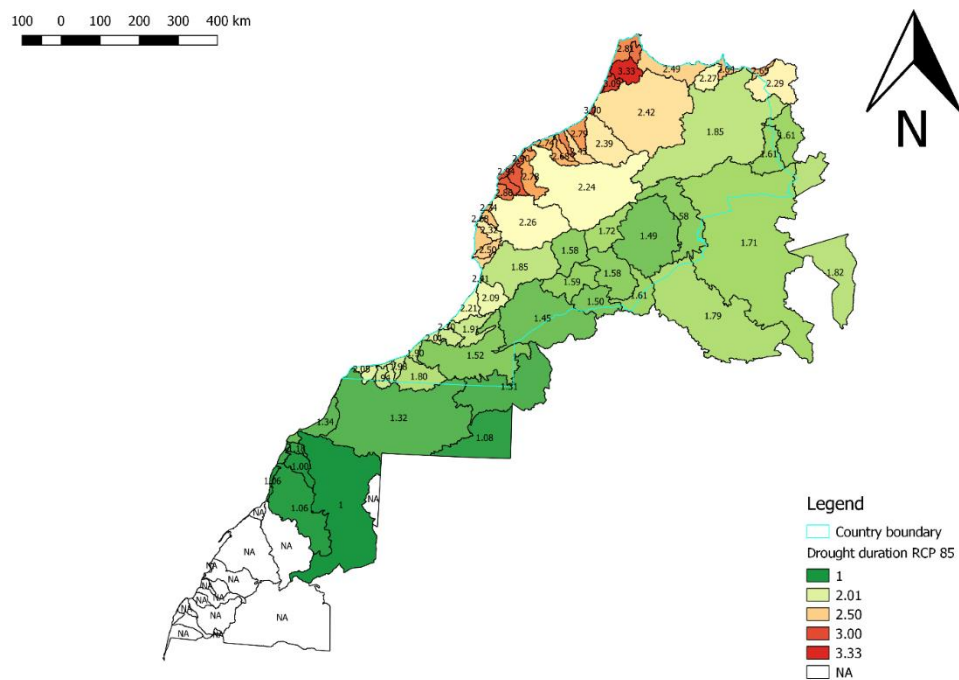


Figure 32: Drought duration (RCP 8.5) , Morocco, Outlook 2050

The predicted drought duration for 2050, as displayed in Figure 31 is expected to range between a duration of 1.5 to 3 months in the northern part of Morocco. Compared to the current situation, the predictions indicate hence a decrease of approx. 6 months across the entire northern part of the country.

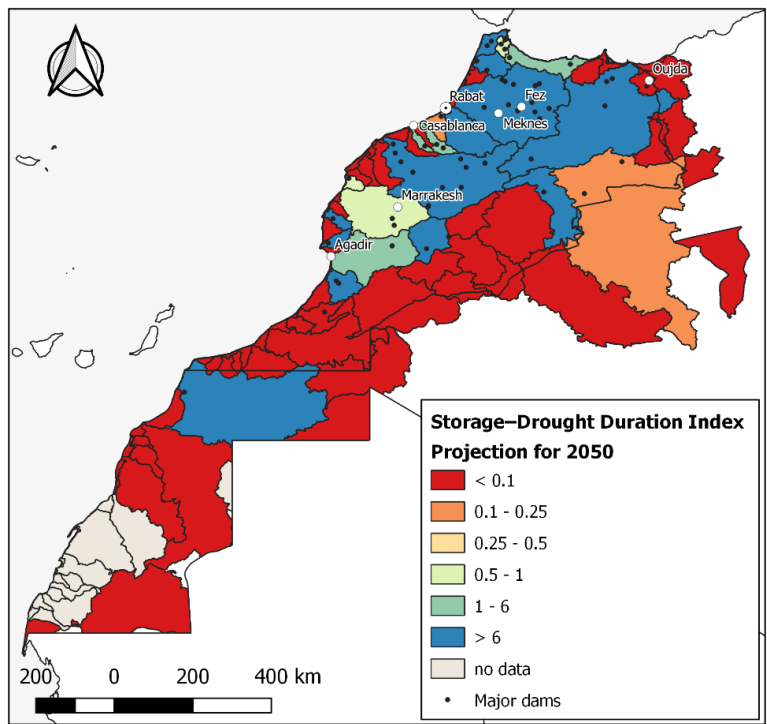


Figure 33: Storage-Drought Duration Index (RCP 8.5), Morocco, Outlook 2050

The predictions of the Storage Drought Duration Index for 2050 is displayed in Figure 32. Especially noticeable are the predicted changes east and southeast of Fes. According to the predicted decrease of the drought length, the capability to sustain the water consumption at a given storage capacity will increase.

The other interesting result is that despite the reduction of the drought lengths, the relative low Water Security in the Sous Massa basin in the east of Agadir, will only be slightly released. In this view, the prioritisation of waste water reuse intervention in this region remains valid.

4.2.4 Sub-Conclusion Morocco

Predicting the water stress and water security in 2050 for Morocco highlights some interesting developments.

First, the results from running the climate model ensemble indicate that at the intensively used agricultural areas, merely a decrease in the inter-annual rainfall than in the intra-annual rainfall variability is to be expected. This is of particular relevance for the rainfed agriculture at the valleys of the Rif mountains of the northern part of Morocco. Using adequate crop-growth models, it should be subject to subsequent investigations for identifying to which extend this will improve the conditions for a rainfed production effectively.

An increase of the inter-annual variability is instead predicted for the arid parts of the Sahara region, where the agriculture depend on irrigation anyway.

Similarly, the model results indicate a reduction of drought length within the river basins in the Atlas and the Rif mountains. While this might be a sign of slightly favouring the conditions for agriculture in general, the dependency on irrigation systems that are fed by ground and surface water will remain most likely.

Concerning the prediction of the Water Stress, as being characterized by the Water Exploitation index, the results underline the future need of elaborating additional information in order to depict future increases in the water consumption. Using the population increase can be considered as a first indication, whereas the correlation between population growth and increase of agricultural area remains limited.

The 2050 predictions for the Storage Drought Duration length index underpin the recommendation to focus the extension of wastewater reuse schemes in the region around Agadir, which was also highlighted when analysing the current situation. Within this area, the relative reduction of drought length is expected to be lower than in the northern part of the country. Increasing the security of access to water by reusing reclaimed wastewater can here has a direct effect on the agricultural production and by concentrating, the effect to one region will inevitably result into a more visible effect at a larger scale.

4.3 Water Stress outlook 2050 - Tunisia

4.3.1 Temporal reliability of water resources

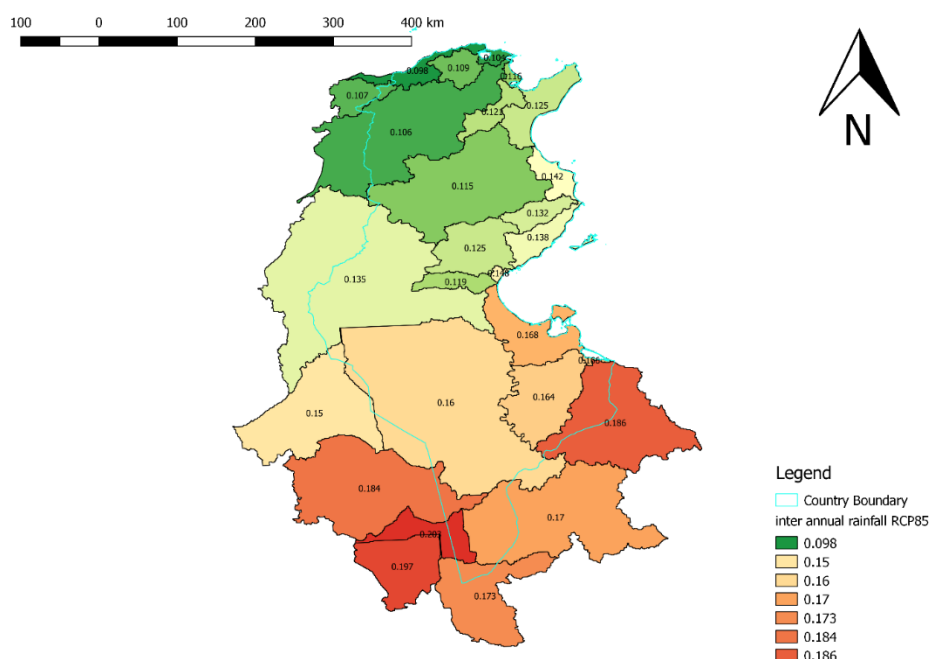


Figure 34: Inter-annual rainfall (RCP 8.5), outlook 2050, Tunisia

The values of the inter-annual rainfall are displayed in Figure 34. The highest values are located in the South of the country, with the maximum of 0.186. The lowest inter-annual rainfall variability (0.098) is expected to be in the North of the country. Comparing this situation to the results from the current state (0.145 until 0.262); it is expected that the variability decreases generally. While the changes are less relevant for the arid South, the results are of particular interest for the northern river basins with the intensive agricultural production present there. Yet, the corresponding significance for affecting the water resources management should be further investigated in additional detailed hydrological studies.


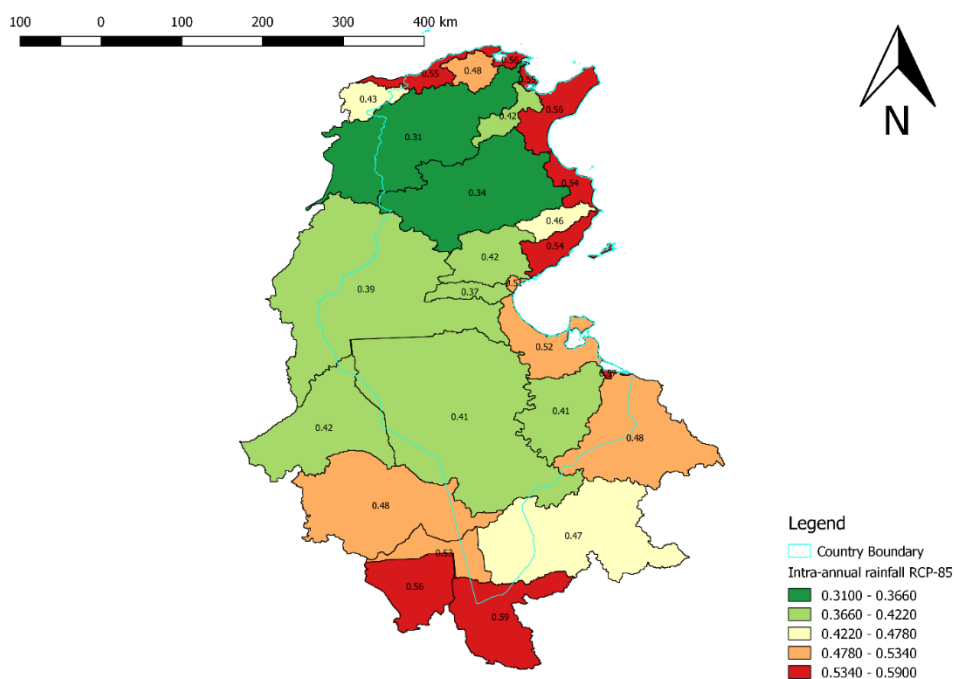


Figure 35: Intra-annual rainfall (RCP 8.5), Tunisia, Outlook 2050

Looking at the intra-annual variability of rainfall (Figure 35), the coefficient of variation varies between 0.31 until 0.59. The lowest values can mostly be found land inwards. The highest intra annual variability is to be expected alongside the east coast.

In comparison to the current state, a slight decrease is predicted for most of the central part and the coastal regions. For the basins in the South, instead an increase of the intra-annual variability is anticipated.


4.3.2 Water Stress Outlook

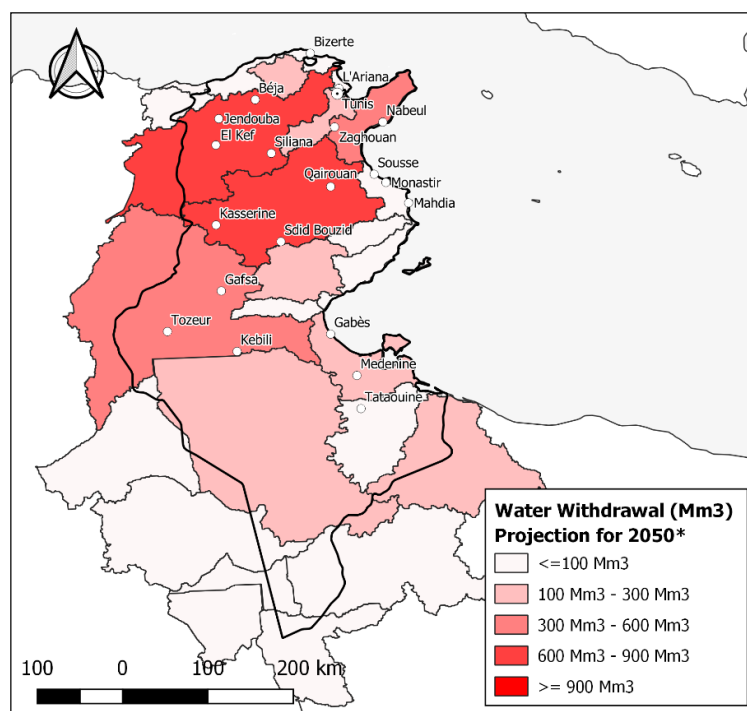

*Water withdrawal projection for 2050 is estimated based in the increment of urban and industrial consumption through the population growth under the pathway SSP3

Figure 36: Water Withdrawal (SSP3), Tunisia, Outlook 2050

The estimation for the future water withdrawal is shown in Figure 35. In comparison to the current state it is interesting to note the results suggest a decrease in the far northern coastal basins and at the eastern coast between Sousse and Gabès.

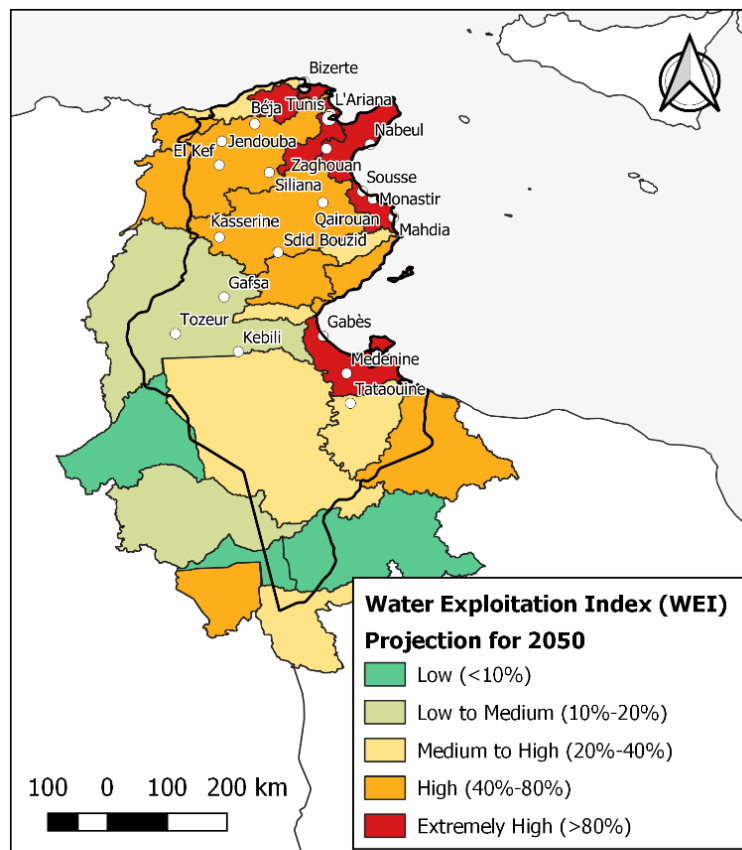

*WEI - Water exploitation index for 2050, measures projected annual water withdrawals (municipal, industrial, and agricultural) expressed as a percentage of the projected annual available water

Figure 37: Water Exploitation Index (RCP8.5/SSP3), Tunisia, Outlook 2050

The results for the future Water Exploitation Index are displayed in Figure 37. It is expected that especially at the eastern coast, the exploitation rate will be increased and reach highest ratios. Similarly the exploitation rate within the Medjerda basin is expected to increase, as well as for the region around Gabès.

Compared to the current situation, the prediction of 2050 emphasizes the critical situation around the larger urbanized areas and coastal touristic centres.

4.3.2.1 Storage Drought Duration Length Index: SDL

Figure 38 displays the predicted drought duration for Tunisia in 2050. The highest value is 2.89 and can be found in the North of the country. The lowest value is 1.52 and can be found in the South. Comparing this to the current state, it can be seen that the minimum drought duration is predicted to be increased, while the maximum drought duration will be lower than under the current condition. The pattern of the drought durations is not expected to vary in future. The highest values both for current state as well as for the 2050 outlook can be found in the South.

4.3.3 Sub-Conclusion Tunisia

The inter-annual rainfall variability is expected to decrease until 2050, with ranges of the coefficient of variation between the 0.098 and 0.186. However, whether this decrease is of significance for the water resources management or not, remains to be further investigated in detail. The prediction for the intra-annual variability of rainfall indicates also a decrease, though it is expected that due to the low absolute rainfall, these changes will be of limited effect for the practiced irrigated agriculture.

The estimations for the future water stress, expressed by the Water Exploitation index, indicate clearly an increase at the East-coast. While basing the predictions on assuming a correlation between the population growth and the increase of water consumption, it is more important to consider principle trends than referring to the absolute numbers.

Predictions for the Storage –Drought Duration Length index in 2050 show mainly for the Medjerda basin some decrease of the drought vulnerability. Here, the absolute numbers are also affected by the non-consideration of reservoir capacity losses and storage levels at the onset of a drought period. Results should be merely considered to depict a relative trend.

4.4 Water Stress outlook 2050 Egypt

4.4.1 Temporal reliability of water resources

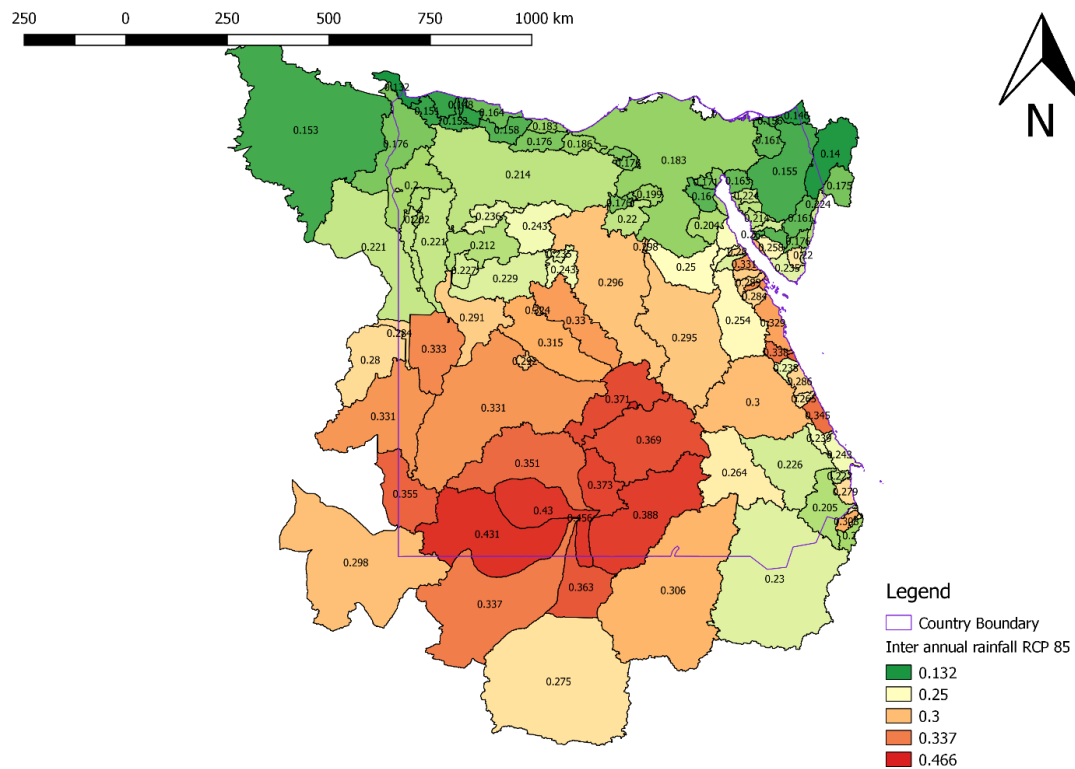


Figure 40: Inter-annual rainfall (RCP 8.5), Egypt, outlook 2050

The 2050 prediction of the inter-annual rainfall reveal a decrease of rainfall variability in the coastal parts along the Mediterranean and for the Delta .

For the central part instead, an increase of rainfall variability is predicted. While this is for the flow of the Nile negligible, it is of particular interest for the eastern small coastal basins at the Red Sea. Here the region already suffer from recurrent flash floods with the related damages on infrastructure and tourism.

A further increase of rainfall variability in this region will likely increase the occurrence of flash floods.

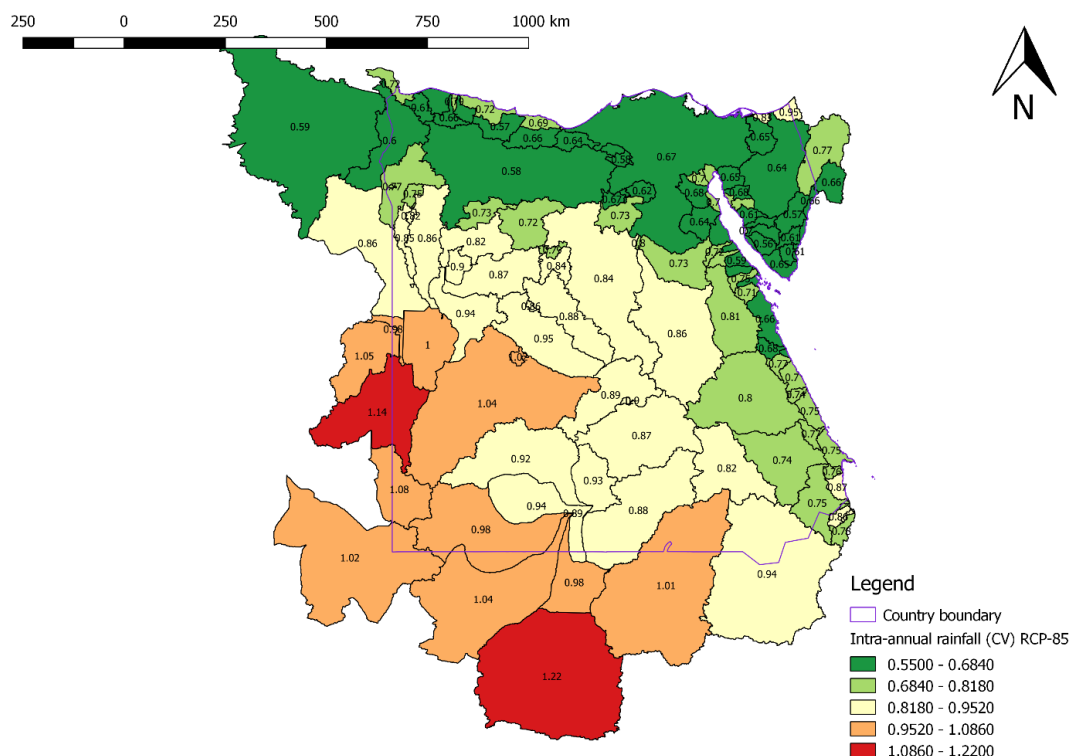


Figure 41: Intra-annual rainfall (RCP 8.5), Egypt, outlook 2050

For the intra-annual variability of rainfall, the 2050 predictions reveal a general lower intra-annual rainfall variability than the current period. However, the little changes reported might be out of significance for the water resources management perspective.

4.4.2 Water Stress Outlook

As described before, water stress at sub-national level was not reported for Egypt, since most of the water resources are coming out of the country and limited by the Nile Waters Agreement of 1959. That's means only one value of TRWR could be reported at national level.

However, the large increment of population expected in Egypt for the 2050 period, from the current 97 million to more than 120 million reported for the SPP3 scenario would increment the pressure onto the water resources, mainly for drinking purposes. This will created a remarkable increment of the urban demand, from the current 9,000 million m³/year to more than 11,200 m³/year.

4.4.3 storage Drought Duration Length Index – SDL outlook

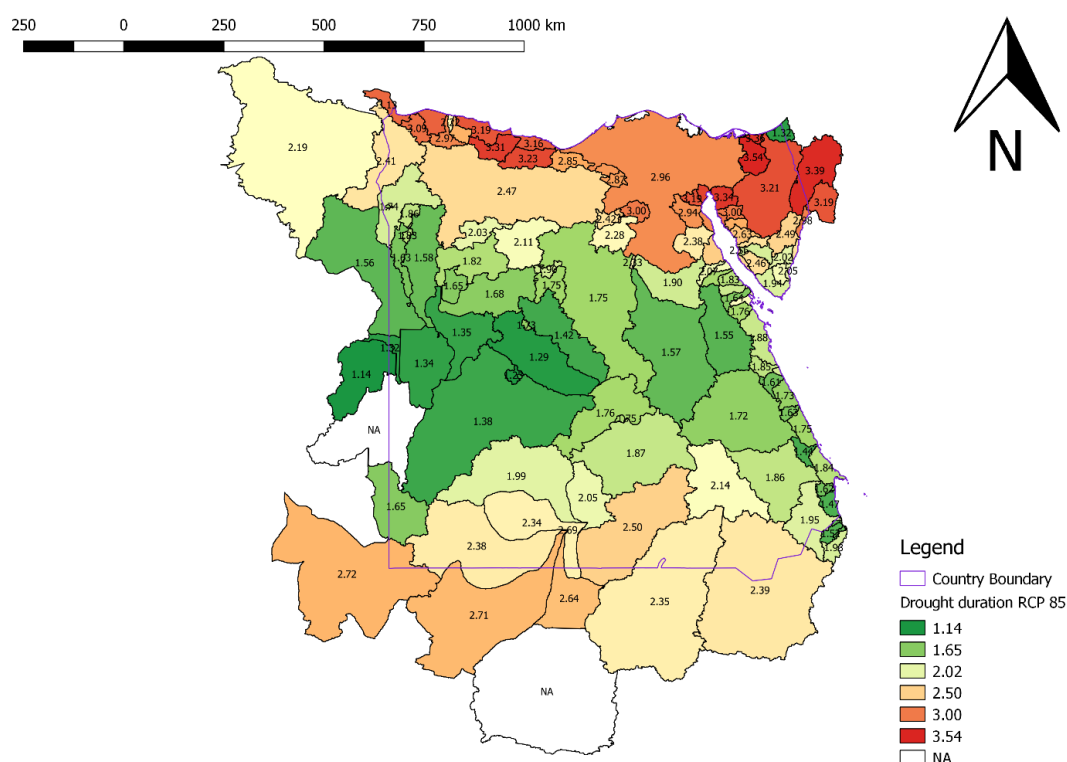


Figure 42: Drought duration (RCP 8.5), Egypt, outlook 2050

Predicting the drought duration for 2050 does not indicate any change that would effectively require change in water management for the country. Only, little increments of the drought duration could be identified in the coastal region and the eastern small coastal basins at the Red Sea. However, since most of the water used in Egypt comes out of the country (Nile basin), the increment of drought duration will have a very little impact from the water management perspective.

4.4.4 Sub-Conclusion Egypt

The advances of the actual Water Stress in Egypt until 2050 will depend to a large extent on the developments in the upper part of the Nile river basin and on the socio-economic development within the Nile Delta and the New Lands.

The large expected increment of population will inevitably result in a higher pressure onto the water resources, requiring more water for urban uses and less water available for irrigation. In order to fill the gap between water availability and water demand in Egypt (note that the current water stress is already very high), the National Water Resources Plan 2017-2037 established the following objectives:

- A better enabling environment for IWRM, planning, and implementation;
- Enhancing the availability of fresh water resources;
- Improving the water quality;
- Enhancing the management of water use

It should be noted that for Egypt the scope for additional fresh water resources is limited, putting further emphasis on the other three objectives.

Therefore, the expected increment on urban water requirement, accompanied by a higher (water related) food demand should be addressed by improving the water efficiency in agriculture (more food per drop), and by importation of food products Thanks to the technology, the increment of water availability from other sources, including a remarkable increase of waste water reuse, should also alleviate the increased water demand.

5 Waste Water Reuse potential 2050

5.1 Approach Mapping Waste Water reuse Potential

A spatial differentiation of the wastewater reuse potential is of advantage to outline future areas. This includes information on where additional effort should be concentrated to advance the wastewater reuse and to transfer future findings of the MadForWater project. For that purpose, a set of maps to assess the urban wastewater reuse potential for irrigation is developed for each country.

The potential of creating business with wastewater reuse in Agriculture depends largely on five factors:

- availability and access of waste water
- suitability of land for irrigated agriculture
- presence of entrepreneurs and capacity to take initiative
- logistics and transport options within the production value chain
- the wider political economy, enabling conditions and regulations.

When it comes to regulation and policy instruments, the enabling framework is more of a principle nature and valid at the entire state. Other favouring conditions such as the availability of innovation partners, the presence of business or technology clusters are more of a local nature.

In the presented approach, the issue of regulation barriers and availability of incentives is hence considered to be uniform at national level and have not been included in the mapping.

The identification of innovation clusters and other favourable conditions at local scale would require a detailed in situ stakeholder and infrastructure mapping. This currently cannot be done with the necessary intensity at the entire area of all three Mediterranean African countries. The same applies for the consideration of local available transport infrastructure. Instead, the proposed approach assumes that both the business and transport infrastructure is principally favoured within urbanized areas. In this view, the aspects of logistics and sufficient entrepreneurial capacities can be indirectly described by the population density.

The mapping of already existing irrigation areas identifies suitable land for wastewater reuse. This is based on the understanding that in the Mediterranean African Countries, irrigated agriculture is already largely developed. Moreover, there is little evidence that those other areas than the desert lands are remaining for the extension of the agricultural activities. It is also assumed that the areas in northern Morocco and Tunisia, which are currently under rainfed production, do not necessarily require irrigation.

The availability of domestic wastewater as a source is dependent on the population, and the way of collecting wastewater. Wastewater from the Agro-Food Industry is also a high potential source. For simplicity, the presented study however does not differentiate domestic and industrial wastewater in the estimation of the potential availability, since in most of the cases, both effluents are discharged to the same point. It is assumed that a high population density also represents areas of more intensive presence of the agro – food industry and hence an availability of wastewater.

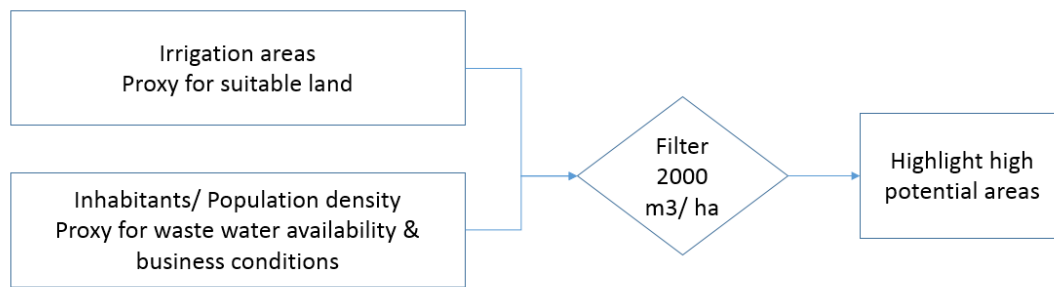


Figure 43 Simplified approach to enable wastewater reuse potential mapping in Morocco, Tunisia, and Egypt

A sensitive issue is the consideration of maximum tolerable distances for the distributing untreated or treated wastewater, as long distances limit the suitability of reuse projects due to high costs.

In the proposed approach, spatially distributed data for irrigated areas were overlaid with information on urban wastewater production.

Urban wastewater production is derived from the GPWv4 population database (Gridded Population of the World, Version 4³). This database provides gridded population at 30 arc-seconds resolution. Urban wastewater production is calculated by multiplying the annual urban fresh water consumption per capita (FAO Aquastat, 2016) by the population at grid level, using a wastewater return factor established in 0.9.

The current irrigated areas at 5 min resolution were extracted from the GMI³² (Global Map of Irrigation Areas) database. A filter of results above a threshold of 2000 m³/ ha available wastewater have been used to mark priority regions.

In a subsequent step, the results from the gridded information were averaged per administrative unit.

It should be noted that in some of the highest populated areas, such as Marrakech or Agadir, there is little availability of irrigated lands at district level. However, large irrigation areas could be found in the neighbours administrative areas and therefore, the potential of reutilisation is very high. This is why, to provide a comprehensive overview, results are displayed both per calculated grid as well as for the administrative units.

5.2 Mapping of Waste water reuse potential for irrigation in Morocco

The use of raw waste water for irrigation is widely applied in Morocco, as Choukr-Allah (2005) reported (Table 4). However, the level of treated waste water reuse is still low in the country. But the rapid increase of wastewater produced and collected in urban areas experienced during the last decades evidences the great potential. According to the National Water Resources Plan (PNA), it is expected that by 2030 the generated wastewater will grow to 900 million m³. The PNA establishes an annual target of 325 million m³ of wastewater to be reused by 2030, mainly for irrigation (142 million m³) and landscaping/golf courses (133 million m³). Other uses such as reuse for industry and groundwater recharge are also considered in the plan.

³ Center for International Earth Science Information Network - CIESIN - Columbia University. 2016. Documentation for the Gridded Population of the World, Version 4 (GPWv4). Palisades NY: NASA Socioeconomic Data and Applications Center (SEDAC). <http://dx.doi.org/10.7927/H4D50JX4> Accessed 17/11/2018

*Table 5 selected areas of raw wastewater reuse in agriculture
(from Choukr Allah, 2005 with reference to CSEC data from 1994)*

Area	Surface (ha)	Crops
Marrakesh	2000	Cereals, fruit trees
Meknes	1400	Cereals, fruit trees
Oujda	1175	Cereals, fruit trees
Fès	800	Fruit trees
El Jadida	800	Foddder

At the present time, further pilots projects are implemented at Quazazate (71.000, High Atlas), Ben Sergao (Agadir area), Ben Slimane (Casablanca region) and Drarga (Agadir area) with a total volume of 7000 m³/day. Recently started projects are also locate in Laayoune (new development area) and Aourir (Agadir surroundings)⁴.

As it could be stated in the following maps, using the wastewater from Agadir or Marrakesh would be most likely restricted to utilize the water from rather the outer skirts of cities, leading to a shorter transportation distance. Within such more urbanized parts, specific production of high value crops and by products (herbs & special crops for aromatic oils) in very intensive production systems would be a first choice.

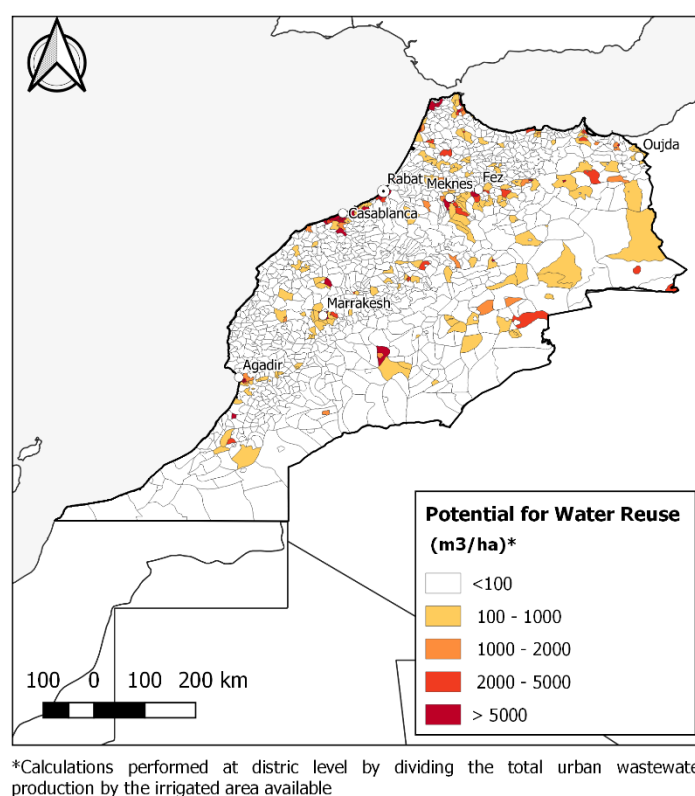


Figure 44 Morocco current Wastewater production divided by irrigated area at district level

Especially the smaller towns in the region east of Agadir with the areas around Taroudant or Oulad Berhil offer a very interesting opportunity.

⁴ <https://www.waterworld.com/articles/wwi/2018/02/aourir-wastewater-project-helps-increase-morocco-s-reuse-efforts.html>

The high business potential is furthermore characterized by a nearby located clustering of agri-enterprises south of Agadir and along the N1 in the surrounding of Tin Mansour (2 hrs drive to Oulad Berhil). The reasonable travel distances would allow investors to engage in new upcoming endeavours in the East of Agadir.

The very similar pattern can be obtained in the surrounding east of Marrakesh, with potential priority areas around Fquih Ben Salah (102 000 inhabitants in 2014). This region is offering a promising combination of water availability, short distances to production areas, and the commercial center of Marrakesh.

Even if the total amount of waste water is less than in Agadir or Marakkesh region, the city of Meknes and its surroundings could be a very interesting priority area too.

This confirms and underlines the advantage of looking to urban cells or resorts that are large enough to produce wastewater and close enough to realize an efficient use.

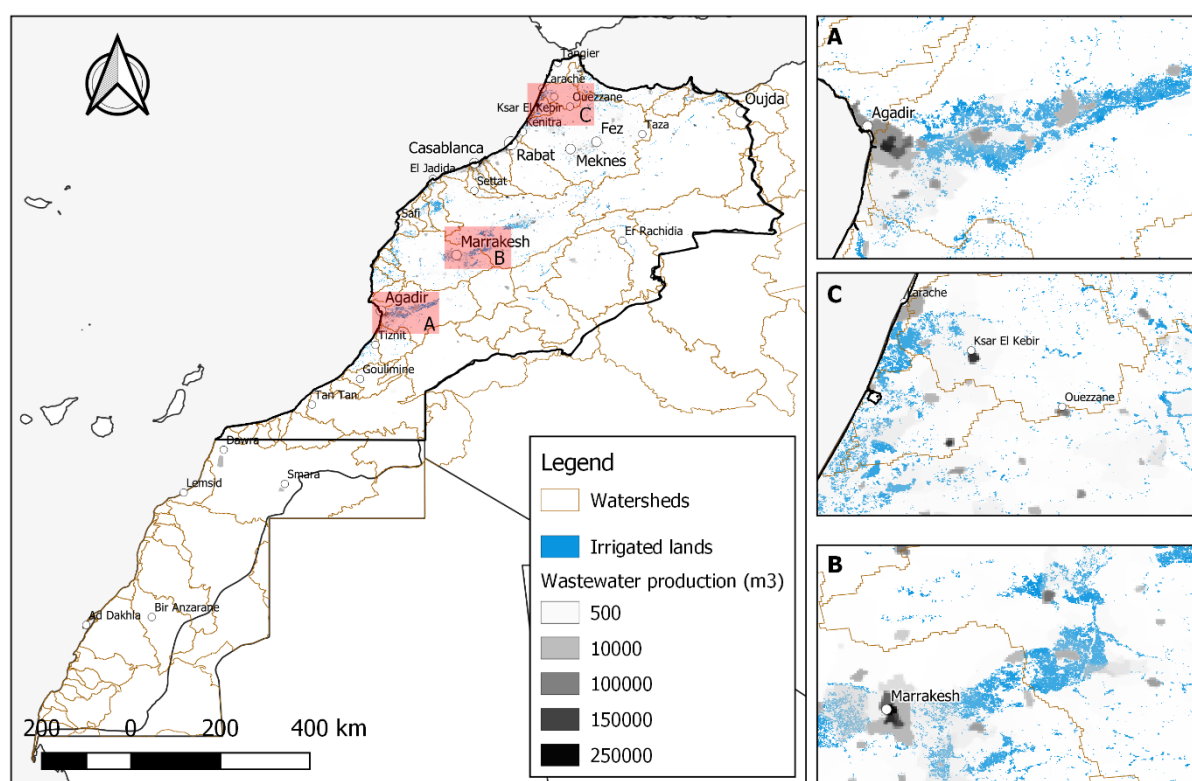


Figure 45: Morocco current location of wastewater production hotspots and location of irrigated areas

5.3 Mapping of Waste water reuse potential for irrigation in Tunisia


Results for averaging the production potential at administrative regions show a clear clustering south of Tunis, east of Jendouba, the areas surrounding Monastir and Mahdia, west of Qairouan, east of Sidid Bouzid and in the vicinity of Medenine. Considering the grid based visualization of results, the regions between Bizerte and Raf Raf, the larger Tunis agglomeration area, south of Kasserine and the region around Gabes appear as distinct priority areas.

Overall, the situation in Tunisia appears more diverse in the possible combination of production potentials and agronomic centres that are more wide spread in Tunisia. Even the areas near Monastir offer a significant potential to reuse the wastewater from touristic centres and to irrigate high valuable crops in a highly intensive and surface minimizing way, whereas the seasonality of the wastewater availability according to the touristic peak seasons should be considered.

From the logistic perspective the priority areas to intensify the production of high value crops should be the area of Nebeul (73 100 inhabitants) at the south of the Cap Bon peninsula.

Within the inland, the surrounding of Kairouan (186,000 inhabitants) offers another interesting focus area.

Both areas are in reasonable transport distances and offer own agri-logistic experiences.

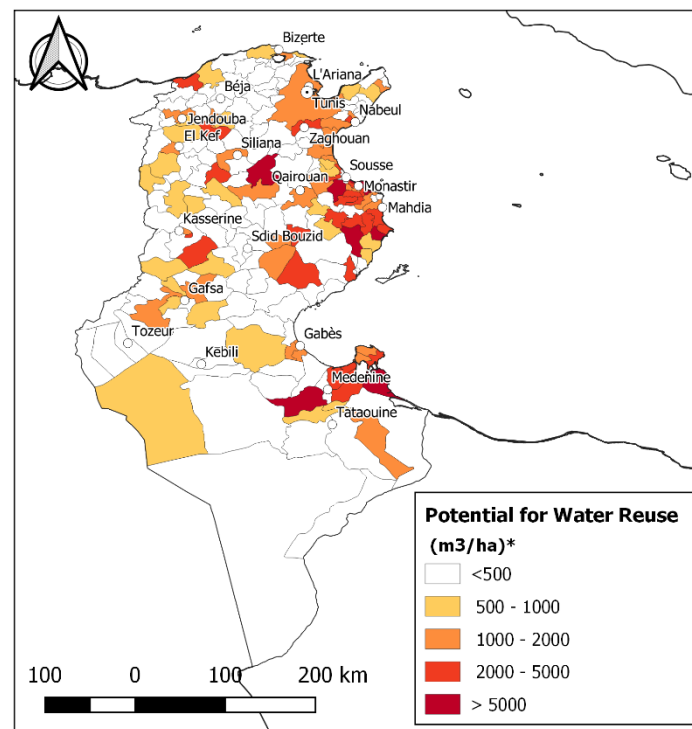

*Calculations performed at district level by dividing the total urban wastewater production by the irrigated area available

Figure 46: Tunisia current Wastewater production divided by irrigated area at district level

The global-recycling info underlines these analyses, emphasizing that in Tunisia only 5% of the mobilized water resources is treated waste water, providing water to a total of 9746 ha of agricultural, golf, and green areas. On the other hand Tunisia is well known for the artificial recharge of ground water reservoirs with treated waste water to supply the industrial sector. Future exploration of the waste water reuse potential certainly must entail the appropriate sourcing and conveyance of sewage water outside the existing systems in the more urban agglomeration zones.


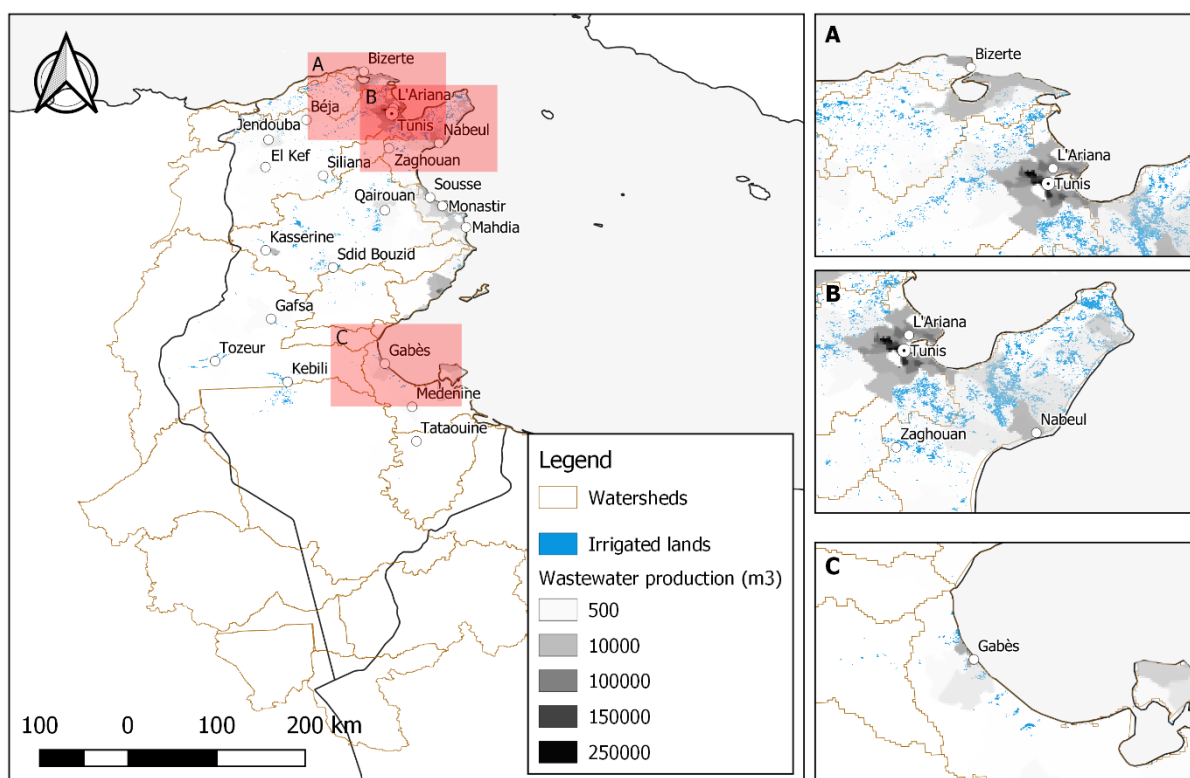


Figure 47: Tunisia current location of wastewater production hotspots and location of irrigated area

5.4 Mapping of Waste water reuse potential for irrigation in Egypt

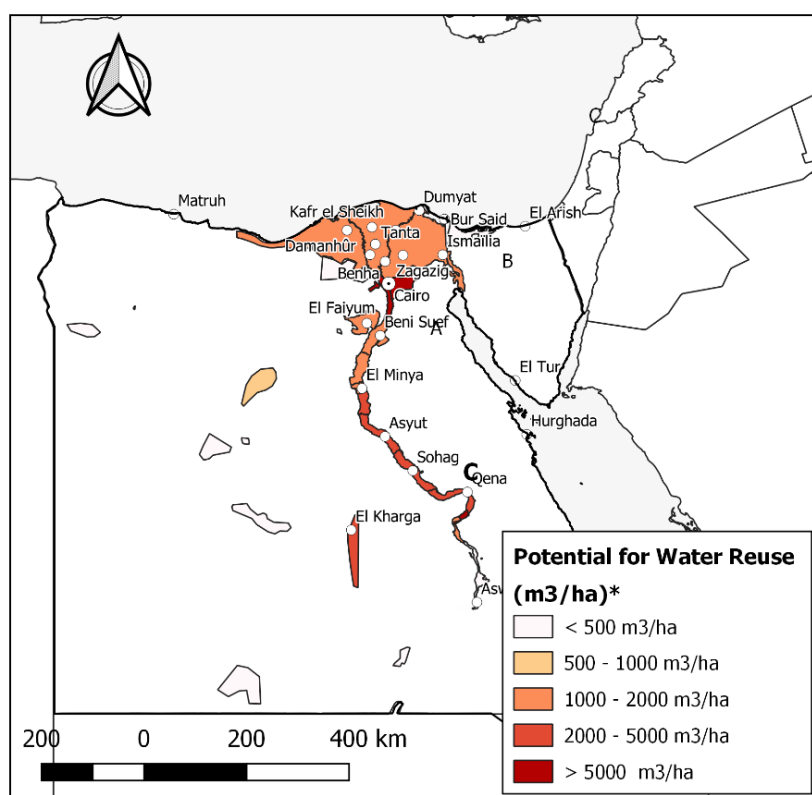

*Calculations performed at irrigation unit level by dividing the total urban wastewater production by the irrigated area available

Figure 48: Egypt current Wastewater production divided by irrigated area at district level

Egypt with its concentration of large population along the Nile valley and the abundance of a number of oases offers in principle very favourable conditions for the wastewater reuse. Only and despite the enormous amount of wastewater that is produced there, the central Cairo city region is not suited for any agricultural reuse as transportation and monitoring issues prevent an efficient operation and practice. Clear focus areas could be instead all cities such as Qena (230,000 inh.), Asyut (400.000 inh.). El Fayoum (440000 inh.), or the outskirts of Cairo with areas such as Benha (196 000 inh.). Being concentrated in the Nile valley, traditionally the distance to irrigated areas is short.

There is a challenge to channel the massive urban sprawl and the rapid transformation of former irrigated lands into urbanized centres, leading to a complex situation and unclear conditions for an organized planning of collection and treatment infrastructure.

The current wastewater policy in Egypt is focussed on the larger cities to be provided with wastewater collection systems and wastewater treatment plants. This massive investment programme of the Egyptian government is supported by World Bank loans. Despite these large investments, the effects of population growth almost annihilates the effects of water quality improvements achieved by this program.

Institutionally, the best opportunities for wastewater reuse would be at local level to solve water quality and health problems at local scale with local initiatives. Currently, Egyptian laws prohibit such local wastewater reuse options.

A particular differentiation must be made for the old and new lands in Egypt. In the old lands, waste water disposals of large cities are discharged into the drainage system and hence ultimately entering the Nile river, the irrigation system through reuse of drainage water pump stations or to the Coastal Lakes and Mediterranean Sea. During times of water shortage, farmers already pump water from the drains and wastewater reuse is actually taking place.

However, by law the drainage systems must comply with a certain water quality standard (as listed under the Law 48), which can often not be met. Efforts to support the reuse of wastewater should therefore mainly concentrate on increasing the wastewater treatment capacity (in quantity, quality, and areal coverage). The meanwhile reached aggravation of the current situation can be stressed by the fact that the government had to terminate already the operation of drinking water supply installations, taking water from irrigation canals where drainage water was reused upstream. Ongoing efforts as e.g. to reuse the water from the Bahr Baqr drain; underline the current momentum in Egypt to advance the wastewater reuse in this way.

For the new lands and the absence of drainage systems, the situation is different. At this stage, treated wastewater is already reused in city gardening.

However, emerging urbanized areas in the new lands with the availability of flat desert areas are in their closer vicinity, offer the potential to construct the collection and monitoring system specifically and from the beginning accordingly to the needs of an effective and safe wastewater reuse. Advanced and adapted treatment systems can be installed to facilitate the purification process on demand for a future reuse as well. Further options that would be of interest could be the increased reuse from agrofood industry wastewater with its defined and nutrient rich composition. The agricultural re-use must not necessarily lie in the production of food crops only, but could consider the production of aromatic plants, seeds, by-products for the bio-economy or e.g. proteins for the fodder industries.

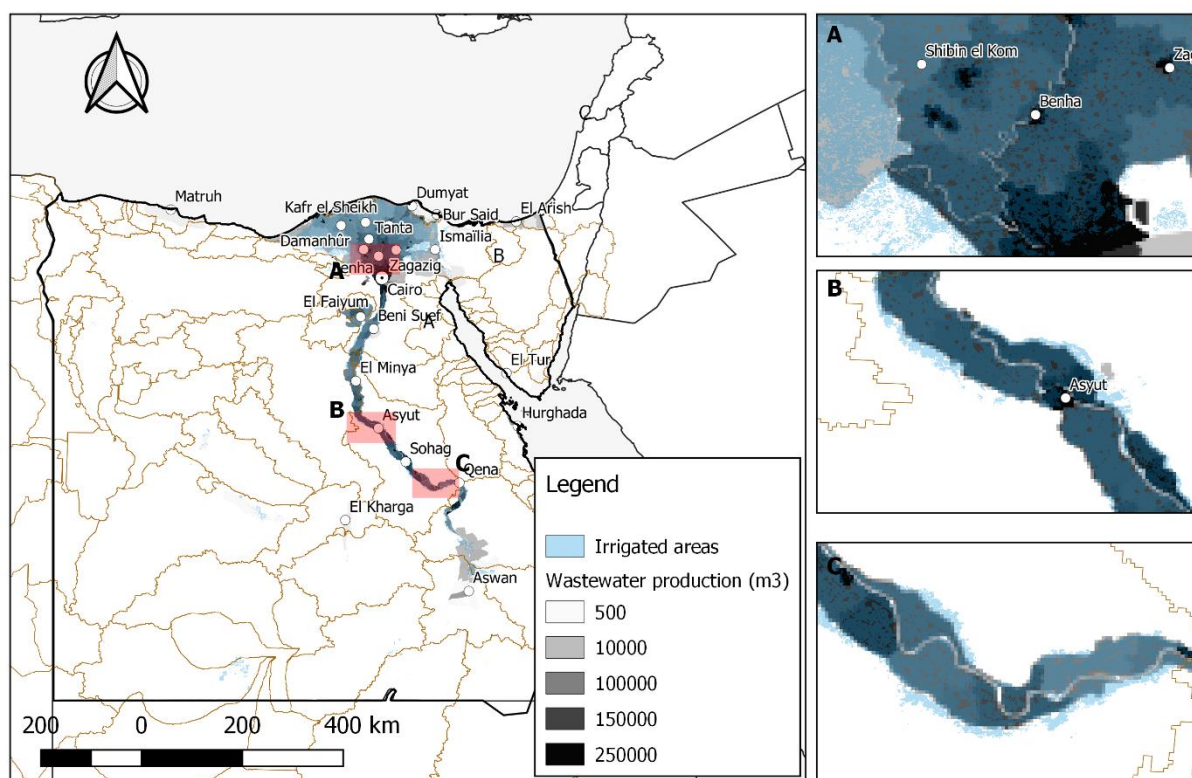


Figure 49: Egypt current location of wastewater production hotspots and location of irrigated areas

5.5 Business Potential for the European Water Sector

The business potential for European companies to collaborate with firms and municipalities can be structured into two domains.

- Waste Water Treatment
- Agricultural Water Use

While there are individual examples of cooperation in all countries, a structural support to advance the cooperation could be an asset.

Table 6 offers an example SWOT on a base of a study that had been recently published by the Dutch Agency to characterize the Moroccan Wastewater Market for Dutch Business. It can be transferred with minor changes also to the situation in Egypt and Tunisia, though Waste Water reuse is clearly in the focus of Morocco's National Water Resources Plan. All countries offer a huge potential from the fact that there is waste water abundantly available and water scarcity is pressing.

The key issues are less related to the technological capacity, than to principle problems. These include the less formalized regulatory environment, favouring the handling of adequate tariffs that could make the operation of waste water reuse scheme in agriculture financially attractive, as well as the challenge to offer advanced technologies (with its related capacity building and maintenance costs) in a cost-competitive context, as well as a fierce competition between key consulting and technology firms in Europe.

Table 6 SWOT Analysis of the Moroccan Wastewater Market (transferred from Dutch to European perspective)

Strength	Weaknesses
<p>Good reputation of European technologies and service providers worldwide.</p> <ul style="list-style-type: none"> · High knowledge and R&D level with research institutions and companies involved in R&D and innovation on the European side · Shared time zone will help to facilitate business dealings. · Wider sectoral experience of European companies can offer proven track record in more industrial contexts. · Various sources of funding at the individual member states are available for project implementation. · Openness in Morocco to new technologies and Foreign Service providers exists, providing these are cost competitive. 	<p>The exchange rate is unfavourable to European exports to Morocco.</p> <ul style="list-style-type: none"> · Capital- and cost-intensive technologies will struggle in an environment of weaker water regulatory enforcement and lower water and discharge tariffs that provides little incentive for investment in wastewater treatment. · A lack of a local track record could lead to hesitation in local market. · A lack of local relationships / partnerships could hamper market entry. · Missing platforms to facilitate relationships between municipalities · Poor skills exist at the operator level in Morocco. However, recently operation and maintenance foreign companies were hired with long-term contracts of up to 25 years
<p>Opportunities</p> <p>Significant quantities of wastewater are produced in the domestic and industrial sector, much of which is treated sub-optimally or not at all.</p> <ul style="list-style-type: none"> · Increasing water scarcity, could drive increased interest in exploring opportunities for water savings and reuse. · Discharge standards are getting stricter, which will drive increased treatment requirements. · Lack of engineering and consulting skills in Morocco could provide strong opportunity for Dutch technology providers and engineering and consultation offices as well. · Lack of operator level skills creates an opportunity for operation and maintenance Dutch companies. · Pressures to reduce energy and greenhouse gas emissions relating to water and wastewater New and niche technologies, particularly for difficult problems, require integrated and durable solutions which could be met by Dutch companies. · Opportunities could exist to provide support for all levels of government on policy implementation and enforcement. · Opportunities could be found to offer skills development and training on the Moroccan market. · Water and wastewater treatment is high on agenda through several programmes (PNDM, PNAR, REUSE, PNDI) 	<p>Threats</p> <ul style="list-style-type: none"> · There is currently direct reuse of raw wastewater in irrigation that provides little incentive for farmers to be willing to pay for Investment in wastewater treatment as tariffs. · There is a strong presence of many international service providers who are well established in the Market. · There might be some preference for using technologies which people are already Comfortable with. · There might be some resistance to trying new technologies. · Lack of advanced technical capacity in Morocco to foster coherently possible solutions at all different administrative levels · Too few references.

Strengthening local capacities to plan, build, operate, and to maintain advanced waste water reuse schemes in the Maghreb would hence be a clear asset that also can facilitate the building on networks and long term partnerships.

Future effort should hence be concentrated on advancing the business landscape and the establishing of Living Lab structures where the co-creation of innovation strategies can be fostered.

A pending issue that can hamper the efficient reuse of wastewater from municipality is the difficult pollution control. This is in particular an issue in the urbanized areas with the conglomerate of manufactures, small industries, and commercial zones representing a convoluted mix of sources and substances discharged. Future solutions could be seen in the real time monitoring of incoming raw water at multiple locations in the collection network and the bypassing from water that is not suited for wastewater reuse. The other direction would be to favour the organized agglomeration of wastewater sources of distinct nature in composition and timings of discharge. Such could be effectively realized in future agro-business parks with and without the connection of purely residential areas or tourist resorts.

6 Bibliography

ALBERGEL, J. ; CLAUDE, J 2001 : Sécheresse et gestion des ressources en cas de pénurie dans les pays du Sud et de l'Est du bassin méditerranéen. In Séminaire Int. "Hydrologie des Régions Méditerranéennes" ; PHI-V / Documents Techniques en Hydrologie. UNESCO Paris France, pp 19-32

Armitage, D., de Loë, R. C., Morris, M., Edwards, T. W., Gerlak, A. K., Hall, R. I., ... & Mirumachi, N. (2015). Science-policy processes for transboundary water governance. *Ambio*, 44(5), 353-366.

Bahri, A., 1999. Water resources development and management in Tunisia. Global Water Partnership, Tunisia Country Report.

Chahed, J., Hamdane A. (2010): Water scarcity and food security: A global assessment of water potential-ity in Tunisia, Chapter 10, <https://www.researchgate.net/publication/266479230>

Chouchane, H., Hoekstra, A. Y., Krol, M. S., & Mekonnen, M. M. (2013). Water footprint of Tunisia from an economic perspective, value of water research report series no. 61.

Comprehensive Assessment of Water Management in Agriculture (2007). Water for food, water for life: a comprehensive assessment of water management in agriculture." London: Earthscan, and Colombo: International Water Management Institute.

Dickson, S. E., C. J. Schuster-Wallace and J. J. Newton (2016). "Water Security Assessment Indicators: The Rural Context." *Water Resources Management* 30(5): 1567-1604.

Eriyagama, N., Smakhtin, V. Y., & Gamage, N. (2009). Mapping drought patterns and impacts: a global perspective (Vol. 133). Iwmi.

FAO. 2016. AQUASTAT Main Database, Food and Agriculture Organization of the United Nations (FAO). Website accessed on [17/12/2018 9:35]

Fischer, G., Hizsnyik, E., Tramberend, S., & Wiberg, D. (2015). Towards indicators for Water Security-A global hydro-economic classification of water challenges.

Funk, C., Peterson, P., Landsfeld, M., Pedreros, D., Verdin, J., Shukla, S., ... & Michaelsen, J. (2015). The climate hazards infrared precipitation with stations—a new environmental record for monitoring extremes. *Scientific data*, 2, 150066.

Garfin, G. M., C. A. Scott, M. Wilder, R. G. Varady and R. Merideth (2016). "Metrics for assessing adaptive capacity and Water Security: common challenges, diverging contexts, emerging consensus." *Current Opinion in Environmental Sustainability* 21: 86-89.

Gassert, F., Landis, M., Luck, M., Reig, P., & Shiao, T. (2013). Aqueduct global maps 2.0. Water Resources Institute (WRI): Washington, DC, 202011-2012.

Gassert, F., Luck, M., Landis, M., Reig, P., & Shiao, T. (2014). Aqueduct global maps 2.1: Constructing decision-relevant global water risk indicators. World Resources Institute.

Gerbens-Leenes, W., Hoekstra, A. Y., & van der Meer, T. H. (2009). The water footprint of bioenergy. *Proceedings of the National Academy of Sciences*, 106(25), 10219-10223.

Gerlak, A. K., L. House-Peters, R. G. Varady, T. Albrecht, A. Zúñiga-Terán, R. R. de Grenade, C. Cook and C. A. Scott (2018). "Water security: A review of place-based research." *Environmental Science & Policy* 82: 79-89.

Giorgi, F., Jones, C., & Asrar, G. R. (2009). Addressing climate information needs at the regional level: the CORDEX framework. *World Meteorological Organization (WMO) Bulletin*, 58(3), 175.

Holmatov, B., Lautze, J., Manthrithilake, H., & Makin, I. (2017). Water security for productive economies: Applying an assessment framework in southern Africa. *Physics and Chemistry of the Earth, Parts A/B/C*, 100, 258-269.

<https://www.worldbank.org/en/topic/water/publication/beyond-scarcity-water-security-in-the-middle-east-and-north-africa> , accessed 4/07/2018

James, L. D. and M. Shafiee-Jood (2017). "Interdisciplinary information for achieving Water Security." *Water Security* 2: 19-31.

Jones, B., & O'Neill, B. C. (2016). Spatially explicit global population scenarios consistent with the Shared Socioeconomic Pathways. *Environmental Research Letters*, 11(8), 084003.

Jones, C., Giorgi, F., & Asrar, G. (2011). The Coordinated Regional Downscaling Experiment: CORDEX—an international downscaling link to CMIP5. *CLIVAR exchanges*, 16(2), 34-40.

Khelifi, S., M. Ameer, N. Mtimet, N. Ghazouani and N. Belhadj (2010). "Impacts of small hill dams on agricultural development of hilly land in the Jendouba region of northwestern Tunisia." *Agricultural water management* 97(1): 50-56.

Kim, Y., I. Kong, H. Park, H. J. Kim, I. J. Kim, M.-J. Um, P. A. Green and C. J. Vörösmarty (2018). "Assessment of regional threats to human Water Security adopting the global framework: A case study in South Korea." *Science of The Total Environment* 637: 1413-1422.

Lall, U., J. Davis, C. Scott, B. Merz and J. Lundqvist (2017). "Pursuing Water Security." *Water Security* 1: 1-2.
Lautze, J. and H. Manthrithilake (2012). "Water security: Old concepts, new package, what value?" *Natural Resources Forum* 36(2): 76-87.

Lautze, J., & Manthrithilake, H. (2012, May). Water security: old concepts, new package, what value?. In *Natural Resources Forum* (Vol. 36, No. 2, pp. 76-87). Oxford, UK: Blackwell Publishing Ltd.

Malekian, A., Hayati, D., & Aarts, N. (2017). Conceptualizations of Water Security in the agricultural sector: Perceptions, practices, and paradigms. *Journal of Hydrology*, 544, 224-232.

Masutomi, Y., Inui, Y., Takahashi, K., & Matsuoka, Y. (2009). Development of highly accurate global polygonal drainage basin data. *Hydrological Processes: An International Journal*, 23(4), 572-584.

Mekonnen, M., & Hoekstra, A. Y. (2011). National water footprint accounts: the green, blue and grey water footprint of production and consumption.

Milutinović, S., R. Laušević, J. Petersen-Perlman, M. Bartula, A. Solujić (2016). Local Water Security Assessment for Improved Water Management in Selected Countries in the Middle East and North Africa (MENA) Region. Technical report for the project "Sustainable Use of Transboundary Water Resources and Water Security Management (WATER SUM)", Component 2: Water and Security. Regional Environmental Center, Szeged, Hungary. ISBN 978-963-9638-70-9

Oliver, J.E. Monthly precipitation distribution: A comparative index. *Prof. Geogr.* 1980, 32, 300-309.

Praveen, K. (2015). "Hydrocomplexity: Addressing Water Security and emergent environmental risks." *Water Resources Research* 51(7): 5827-5838.

Sadoff, C. W., Hall, J. W., Grey, D., Aerts, J. C. J. H., Ait-Kadi, M., Brown, C., ... & McCornick, P. (2015). *Securing water, sustaining growth: Report of the GWP*.

Srinivasan, V., M. Konar and M. Sivapalan (2017). "A dynamic framework for Water Security." *Water Security* 1: 12-20.

Stathatou, P. M., Kampragou, E., Grigoropoulou, H., Assimacopoulos, D., Karavitis, C., Porto, M. F. A., ... & Reyna, S. (2016). Vulnerability of water systems: a comprehensive framework for its assessment and identification of adaptation strategies. *Desalination and Water Treatment*, 57(5), 2243-2255.

Sulser, T. B., C. Ringler, T. Zhu, S. Msangi, E. Bryan and M. W. Rosegrant (2010). "Green and blue water accounting in the Ganges and Nile basins: Implications for food and agricultural policy." *Journal of Hydrology* 384(3): 276-291.

Svoboda, M., Hayes, M., & Wood, D. (2012). *Standardized precipitation index user guide*. World Meteorological Organization Geneva, Switzerland.

Swatuk, D. Tickner, C. A. Scott, N. Mirumachi and N. Matthews (2016). "Reductionist and integrative research approaches to complex Water Security policy challenges." *Global Environmental Change* 39: 143-154.

van Beek, E., & Arriens, W. L. (2014). *Water security: Putting the concept into practice*. Stockholm: Global Water Partnership.

Veettil, A. V. and A. K. Mishra (2016). "Water security assessment using blue and green water footprint concepts." *Journal of hydrology* 542: 589-602.

Vörösmarty, C.J., McIntyre, P.B., Gessner, M.O., Dudgeon, D., Prusevich, A., Green, P., Glidden, S., Bunn, S.E., Sullivan, C.A., Liermann, C.R. and Davies, P.M., 2010. Global threats to human Water Security and river biodiversity. *Nature*, 467(7315), p.555.

Water, U. N. (2013). *Water security and the global water agenda: a UN-water analytical brief*. Hamilton, ON: UN University.

World Bank. 2017. *Beyond Scarcity: Water Security in the Middle East and North Africa*. MENA Development Series. World Bank, Washington, DC. License: Creative Commons Attribution CC BY 3.0 IGO

Wouters, P. (2010). *Water security: Global, regional and local challenges*.

Zeitoun, M. (2011). The global web of national Water Security. *Global Policy*, 2(3), 286-296.

Zeitoun, M., B. Lankford, T. Krueger, T. Forsyth, R. Carter, A. Y. Hoekstra, R. Taylor, O. Varis, F. Cleaver, R. Boelens, L.